

# RF TEST REPORT


**Certificate No.** : TB210528151  
**Applicant** : Navori SA  
**Equipment Under Test (EUT)**  
**EUT Name** : StiX  
**Model No.** : 3700  
**Series Model No.** : N/A  
**Brand Name** : Navori  
**Receipt Date** : 2021-05-14  
**Test Date** : 2021-05-14 to 2021-06-22  
**Issue Date** : 2021-06-22  
**Standards** : ETSI EN 300 328 V2.2.2: 2019  
**Conclusions** : **PASS**

In the configuration tested, the EUT complied with the standards specified above. The EUT technically complies with the Council Directive 2014/53/EU relating to radio equipment.

**Test/Witness Engineer** : *Camille Li*

**Engineer Supervisor** : *Ivan Su*

**Engineer Manager** : *Ray Lai*



Ray Lai

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

**TABLE OF CONTENTS**

- 1 GENERAL INFORMATION..... 5**
  - 1.1 Client Information..... 5
  - 1.2 General Description of EUT (Equipment Under Test) ..... 5
  - 1.3 Block Diagram Showing the Configuration of System Tested..... 9
  - 1.4 Description of Support Units ..... 10
  - 1.5 Description of Operating Mode..... 10
  - 1.6 Description of Test Software Setting ..... 10
  - 1.7 Description of Operating Mode..... 10
  - 1.8 Measurement Uncertainty ..... 12
  - 1.9 Test Facility..... 12
- 2 TEST RESULTS SUMMARY ..... 13**
- 3 TEST SOFTWARE ..... 14**
- 4 TEST EQUIPMENT ..... 15**
- 5 RF OUTPUT POWER ..... 16**
  - 5.1 Test Standard and Limit..... 16
  - 5.2 Test Setup..... 16
  - 5.3 Test Procedure..... 16
  - 5.4 Deviation From Test Standard..... 17
  - 5.5 Test Data..... 17
- 6 DUTY CYCLE, TX-SEQUENCY, TX-GAP ..... 18**
  - 6.1 Test Standard and Limit..... 18
  - 6.2 Deviation From Test Standard..... 18
  - 6.3 Test Result..... 18
- 7 ACCUMULATED TRANSMIT TIME, FREQUENCY OCCUPATION AND HOPPING SEQUENCE ..... 19**
  - 7.1 Test Standard and Limit..... 19
  - 7.2 Test Setup..... 20
  - 7.3 Test Procedure..... 20
  - 7.4 Deviation From Test Standard..... 21
  - 7.5 Test Data..... 21
- 8 HOPPING FREQUENCY SEPARATION ..... 22**
  - 8.1 Test Standard and Limit..... 22
  - 8.2 Test Setup..... 22
  - 8.3 Test Procedure..... 22
  - 8.4 Deviation From Test Standard..... 22
  - 8.5 Test Data..... 22
- 9 OCCUPIED CHANNEL BANDWIDTH..... 23**
  - 9.1 Test Standard and Limit..... 23
  - 9.2 Test Setup..... 23
  - 9.3 Test Procedure..... 23
  - 9.4 Test Data..... 24
  - 9.5 Deviation From Test Standard..... 24
- 10 MEDIUM UTILISATION (MU) FACTOR ..... 25**
  - 10.1 Test Standard and Limit ..... 25
  - 10.2 Deviation From Test Standard..... 25

10.3 Test Result..... 25

**11 ADAPTIVITY (ADAPTIVE FREQUENCY HOPPING)..... 26**

11.1 Test Standard and Limit ..... 26

11.2 Test Result..... 26

**12 TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN ..... 27**

12.1 Test Standard and Limit ..... 27

12.2 Test Setup..... 27

12.3 Test Procedure..... 27

12.4 Deviation From Test Standard..... 29

12.5 Test Data..... 29

**13 TRANSMITTER UNWANTED SPURIOUS EMISSIONS IN THE SPURIOUS DOMAIN ..... 30**

13.1 Test Standard and Limit ..... 30

13.2 Test Setup..... 31

13.3 Test Procedure..... 32

13.4 Deviation From Test Standard..... 33

13.5 Test Data..... 33

**14 RECEIVER SPURIOUS EMISSIONS ..... 34**

14.1 Test Standard and Limit ..... 34

14.2 Test Setup..... 34

14.3 Test Procedure..... 35

14.4 Deviation From Test Standard..... 36

14.5 Test Data..... 36

**15 RECEIVER BLOCKING ..... 37**

15.1 Test Standard and Limit ..... 37

15.2 Test Procedure..... 39

15.3 Deviation From Test Standard..... 39

15.4 Test Result..... 39

**16 GEO-LOCATION CAPABILITY ..... 40**

16.1 Standard Requirement..... 40

16.2 Deviation From Test Standard..... 40

16.3 Test Result..... 40

**17 PHOTOGRAPHS – TEST SETUP..... 41**

**ATTACHMENT A-- RF OUTPUT POWER TEST DATA..... 42**

**ATTACHMENT B-- ACCUMULATED TRANSMIT TIME, FREQUENCY OCCUPATION AND HOPPING SEQUENCE TEST DATA..... 46**

**ATTACHMENT C-- HOPPING FREQUENCY SEPARATION TEST DATA ..... 55**

**ATTACHMENT D-- OCCUPIED CHANNEL BANDWIDTH TEST DATA ..... 57**

**ATTACHMENT E-- TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN TEST DATA ..... 60**

**ATTACHMENT F-- TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN TEST DATA..... 63**

**ATTACHMENT G-- RECEIVER SPURIOUS EMISSIONS TEST DATA..... 77**

**ATTACHMENT H-- RECEIVER BLOCKING TEST DATA..... 91**



# 1 General Information

## 1.1 Client Information

<b>Applicant</b>	:	Navori SA
<b>Address</b>	:	Rue du Lion d'Or 4, CH-1003 Lausanne, Switzerland
<b>Manufacturer</b>	:	Shenzhen MicoRose Technology Co., Ltd.
<b>Address</b>	:	8B2A, Daqing Building, southeast of the intersection of Shennan Road and Guangshen Expressway, Futian District, Shenzhen, China

## 1.2 General Description of EUT (Equipment Under Test)

<b>EUT Name</b>	:	StiX	
<b>Model(s)</b>	:	3700	
<b>Product Description</b>	:	Operation Frequency:	Bluetooth V4.0: 2402MHz~2480MHz
		Modulation Type:	GFSK(1Mbps) Pi/4-DQPSK(2Mbps) 8-DPSK(3Mbps)
		Channel Separation:	1MHz
		Number of Channel:	Please see Note(3)
		Antenna Gain:	2.0 dBi External Antenna
		E.I.R.P.:	GFSK: 4.1dBm (Max) Pi/4-DQPSK: 4.19dBm (Max) 8-DPSK: 4.19dBm (Max)
<b>Power Supply</b>	:	For Adapter: Input: 100-240V~ Output:5V $\overline{\text{---}}$ , 2.5A	
<b>Software Version</b>	:	android 9.0	
<b>Hardware Version</b>	:	V1	
<b>Connecting I/O Port(S)</b>	:	Please refer to the User's Manual	
<b>Remark</b>	:	The antenna gain provided by the applicant, the adapter and verified for the RF conduction test and adapter provided by TOBY test lab.	

### Note:

(1) This Test Report is EN 300328 for Bluetooth, under RED Article 3.2.

(2) The Product Information

**a) The type of modulation used by the equipment:**

- FHSS  
 other forms of modulation

**b) In case of FHSS modulation:**

- In case of non-Adaptive Frequency Hopping equipment:  
 The number of Hopping Frequencies:

- In case of Adaptive Frequency Hopping Equipment:
  - The maximum number of Hopping Frequencies: 79
  - The minimum number of Hopping Frequencies: 79
  - The (average)Dwell Time: 322.3ms

**c) Adaptive / non-adaptive equipment:**

- non-adaptive Equipment
- adaptive Equipment without the possibility to switch to a non-adaptive mode
- adaptive Equipment which can also operate in a non-adaptive mode

**d) In case of adaptive equipment:**

The Channel Occupancy Time implemented by the equipment:

- The equipment has implemented an LBT based DAA mechanism
  - In case of equipment using modulation different from FHSS:
    - The equipment is Frame Based equipment
    - The equipment is Load Based equipment
- The equipment can switch dynamically between Frame Based and Load Based equipment
  - The CCA time implemented by the equipment: .....  $\mu$ s
  - The equipment has implemented an non-LBT based DAA mechanism
  - The equipment can operate in more than one adaptive mode

**e) In case of non-adaptive Equipment:**

The maximum RF Output Power (e.i.r.p.): *dBm*

The maximum (corresponding) Duty Cycle: *%*

Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and corresponding power levels to be declared):

**f) The worst case operational mode for each of the following tests:**

- RF Output Power
  - GFSK
- Power Spectral Density
- Duty cycle, Tx-Sequence, Tx-gap
- Dwell time, Minimum Frequency Occupation & Hopping Sequence (only for FHSS equipment)
  - GFSK
- Accumulated Transmit time, Frequency Occupation & Hopping Sequence (only for FHSS equipment)
  - GFSK
- Hopping Frequency Separation (only for FHSS equipment)
- Medium Utilisation

.....

- Adaptivity & Receiver Blocking

.....

- Nominal Channel Bandwidth
  - GFSK
- Transmitter unwanted emissions in the OOB domain
  - GFSK
- Transmitter unwanted emissions in the spurious domain
  - GFSK
- Receiver spurious emissions
  - GFSK

**g) The different transmit operating modes (tick all that apply):**

- Operating mode 1: Single Antenna Equipment

- Equipment with only 1 antenna
- Equipment with 2 diversity antennas but only 1 antenna active at any moment in time
- Smart Antenna Systems with 2 or more antennas, but operating in a (legacy) mode where only 1 antenna is used. (e.g. IEEE 802.11™ [i.3] legacy mode in smart antenna systems)
  - Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming
    - Single spatial stream / Standard throughput / (e.g. IEEE 802.11™ [i.3] legacy mode)
    - High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1
    - High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2

NOTE: Add more lines if more channel bandwidths are supported.

- Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming
  - Single spatial stream / Standard throughput (e.g. IEEE 802.11™ [i.3] legacy mode)
  - High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1
  - High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2

NOTE: Add more lines if more channel bandwidths are supported.

**h) In case of Smart Antenna Systems:**

- The number of Receive chains: .....
- The number of Transmit chains: .....
  - symmetrical power distribution
  - asymmetrical power distribution

In case of beam forming, the maximum beam forming gain: .....

NOTE: Beam forming gain does not include the basic gain of a single antenna.

**i) Operating Frequency Range(s) of the equipment:**

- Operating Frequency Range 1: **2402 MHz to 2480 MHz**
- Operating Frequency Range 2: ..... MHz to ..... MHz

NOTE: Add more lines if more Frequency Ranges are supported.

**j) Nominal Channel Bandwidth(s):**

- Occupied Channel Bandwidth 1: **1.169MHz**
- Occupied Channel Bandwidth 2: **1.179MHz**
- Occupied Channel Bandwidth 3: **1.171MHz**

NOTE: Add more lines if more channel bandwidths are supported.

**k) Type of Equipment (stand-alone, combined, plug-in radio device, etc.):**

- Stand-alone
- Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment)
  - Plug-in radio device (Equipment intended for a variety of host systems)
  - Other .....

**l) The extreme operating conditions that apply to the equipment:**

- Operating temperature range: **-10° C to 50° C**
- Operating voltage range: **207V to 253V** ■ AC □ DC

Details provided are for the: ■ stand-alone equipment

- combined (or host) equipment
- test jig

**m) The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p levels:**

- Antenna Type
  - External Antenna
    - Antenna Gain: **2.0 dBi**
    - If applicable, additional beamforming gain (excluding basic antenna gain): ..... dB

- Temporary RF connector provided
- No temporary RF connector provided
- Dedicated Antennas (equipment with antenna connector)
  - Single power level with corresponding antenna(s)
  - Multiple power settings and corresponding antenna(s)
    - Number of different Power Levels: .....
    - Power Level 1: ..... dBm
    - Power Level 2: ..... dBm
    - Power Level 3: ..... dBm

NOTE 1: Add more lines in case the equipment has more power levels.

NOTE 2: These power levels are conducted power levels (at antenna connector).

**n) The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:**

Details provided are for the:  stand-alone equipment

- combined (or host) equipment
- test jig

Supply Voltage  AC mains State

- DC State      DC voltage: .....

In case of DC, indicate the type of power source

- Internal Power Supply
- External Power Supply or AC/DC adapter
- Battery
- Other: .....

**o) Describe the test modes available which can facilitate testing:**

The EUT can transmit with test software: FCC assist

**p) The equipment type (e.g. Bluetooth®, IEEE 802.11™ [i.3], proprietary, etc.):**

Bluetooth V4.0

**q) If applicable, the statistical analysis referred to in clause 5.3.1q:**

**r) If applicable, the statistical analysis referred to in clause 5.3.1r:**

**s) Geo-location capability, supported by the equipment:**

- Yes
  - The geographical location determined by the equipment as defined in clause 4.3.1.13.2 or clause 4.3.2.12.2 is not accessible to the user.
- No

**t) Describe the minimum performance criteria that apply to the equipment (see clause 4.3.1.12.3 or clause 4.3.2.11.3):**


The minimum performance criterion shall be a PER less than or equal to 10%.

The intended use of the equipment should be in the normal operation without lost the communication link or no unintentionally operation occurs.

(3) Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	<b>39</b>	<b>2441</b>	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	<b>78</b>	<b>2480</b>
25	2427	52	2454		
26	2428	53	2455		

1.3 Block Diagram Showing the Configuration of System Tested

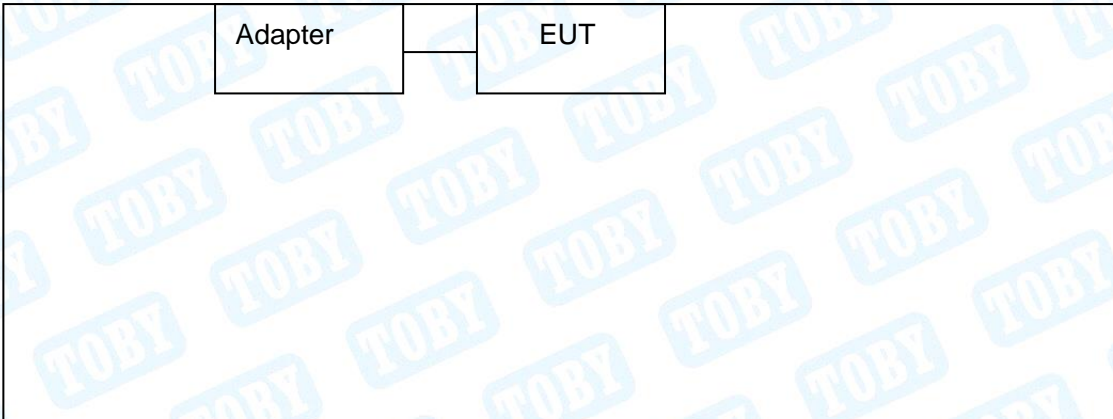

## 1.4 Description of Support Units

Equipment Information				
Name	Model	S/N	Manufacturer	Used “√”
Adapter	FJ-SW7260502500DE	-----	-----	√

## 1.5 Description of Operating Mode

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Channel	
Lowest Channel	CH00:2402MHz
Middle Channel	CH39:2441MHz
Highest Channel	CH78:2480MHz

Test Mode	Description
Mode 1	Transmit mode (GFSK 2402/2441/2480MHz)
Mode 2	Transmit mode (Pi/4-DQPSK 2402/2441/2480MHz)
Mode 3	Transmit mode (8-DPSK 2402/2441/2480MHz)
Mode 4	Receive mode (GFSK 2402/2441/2480MHz)
Mode 5	Receive mode (Pi/4-DQPSK 2402/2441/2480MHz)
Mode 6	Receive mode (8-DPSK 2402/2441/2480MHz)

## 1.6 Description of Test Software Setting

During testing channel& Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of Bluetooth mode.

## 1.7 Description of Operating Mode

Normal Temperature (NT):	25 °C
Relative Humidity:	25% to 75%
Air Pressure:	980-2020 hPa
Extreme Temperature:	Low Temperature (LT)= -10°C High Temperature (HT)= +50°C
Normal Voltage of EUT (NV):	AC 230V

Extreme Voltage of the EUT:	Low Voltage (LV)=207V High Voltage (HV)=253V
<b>Remark:</b> The extreme temperature and extreme voltage of the EUT is declared by the manufacturer.	

## 1.8 Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

Test Item	Expanded Uncertainty ( $U_{Lab}$ )
Conducted Emission	$\pm 3.50$ dB
Radiated Emission (9kHz to 30 MHz)	$\pm 4.60$ dB
RF Power-Conducted	$\pm 0.95$ dB
Radiated Emission (30MHz to 1000 MHz)	$\pm 4.50$ dB
Radiated Emission (Above 1000MHz)	$\pm 4.20$ dB
Temperature	$\pm 0.6^{\circ}\text{C}$
Humidity	$\pm 4\%$
ERP (Radiated)	$\pm 3.84$ dB
Conducted Spurious Emission	$\pm 2.72$ dB
Frequency Error	$\pm 52.45\text{Hz}$
Occupied Bandwidth	$\pm 3.8\%$
Power Density	$\pm 0.92$ dB

## 1.9 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1/F., Building 6, Rundongsheng Industrial Zone, Longzhu, Xixiang, Bao'an District, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

### **CNAS (L5813)**

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

### **A2LA Certificate No.: 4750.01**

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01.FCC Accredited Test Site Number: 854351.

### **IC Registration No.: (11950A)**

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A.

## 2 Test Results Summary

Harmonized Standard ETSI EN 300 328							
Relationship between the present document and the essential requirements of Directive 2014/53/EU							
Essential Requirement			Requirement Conditionality		Test Specification		
No	Description	Reference: Clause No	U/C	Condition	E/O	Reference: Clause No	Observations
1	RF Output Power	4.3.1.2 or 4.3.2.2	U		E	5.4.2	PASS Note(2)
2	Power Spectral Density	4.3.2.3	C	Only for equipment using wide band modulations other than FHSS	E	5.4.3	N/A
3	Duty Cycle, Tx-Sequence, TX-gap	4.3.1.3 or 4.3.2.4	C	Only for non-adaptive equipment	E	5.4.2	N/A Note(3)
4	Accumulated Transmit time, Frequency Occupation & Hopping Sequence	4.3.1.4	C	Only for FHSS equipment	E	5.4.4	PASS
5	Hopping Frequency Separation	4.3.1.5	C	Only for FHSS equipment	E	5.4.5	PASS
6	Medium Utilization	4.3.1.6 or 4.3.2.5	C	Only for non-adaptive equipment	E	5.4.2	N/A Note(3)
7	Adaptivity	4.3.1.7 or 4.3.2.6	C	Only for adaptive equipment		5.4.6	N/A Note(3)
8	Occupied Channel Bandwidth	4.3.1.8 or 4.3.2.7	U		E	5.4.7	PASS
9	Transmitter unwanted emission in the OOB domain	4.3.1.9 or 4.3.2.8	U		E	5.4.8	PASS
10	Transmitter unwanted emissions in the spurious domain	4.3.1.10 or 4.3.2.9	U		E	5.4.9	PASS
11	Receiver spurious emissions	4.3.1.11 or 4.3.2.10	U		E	5.4.10	PASS
12	Receiver Blocking	4.3.1.12 or 4.3.2.11	U		E	5.4.11	PASS
13	Geo-location Capability	4.3.1.13 or 4.3.2.12	C	Only for equipment with geo-location capability	X		

Note:

(1) "U/C": indicates whether the requirement is to be unconditionally applicable (U) or is conditional upon the manufacturers claimed functionality of the equipment (C).

"E/O": indicates whether the test specification forms part of the Essential Radio Test Suite (E) or whether it is one of the Other Test Suite (O).

"X": indicates there is no test specified corresponding to the requirement.

"N/A": indicates test is not applicable in this Test Report.

- (2) The equipment must be complied with as a necessary condition for presumption of conformity, although conformance with the requirement may be claimed by an equivalent test or by manufacturer's assertion supported by appropriate entries in the technical construction file.
- (3) This requirement does not apply for equipment with a maximum declared RF Output power level of less than 10 dBm e.i.r.p. for equipment when operating in a mode where the RF Output power is less than 10 dBm e.i.r.p.
- (4) The equipment was supplied by Host system, so the upper extreme test voltage shall be 1.1 times the nominal voltage of the battery, and the lower extreme test voltage shall be 0.9 times the nominal voltage of the Host system.

### 3 Test Software

Test Item	Test Software	Manufacturer	Version No.
Radiation Emission	EZ-EMC	EZ	FA-03A2RE
RF Conducted Measurement	MTS-8310	MWRFtest	V2.0.0.0

## 4 Test Equipment

Used Equipment List					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	144382	Sep. 11, 2020	Sep. 10, 2021
MXA Signal Analyzer	Agilent	N9020A	MY49100060	Sep. 11, 2020	Sep. 10, 2021
Vector Signal Generator	Agilent	N5182A	MY50141294	Sep. 11, 2020	Sep. 10, 2021
Analog Signal Generator	Agilent	N5181A	MY50141953	Sep. 11, 2020	Sep. 10, 2021
RF Power Sensor	DARE!! Instruments	RadiPowerRP R3006W	17100015SNO26	Sep. 11, 2020	Sep. 10, 2021
	DARE!! Instruments	RadiPowerRP R3006W	17100015SNO29	Sep. 11, 2020	Sep. 10, 2021
	DARE!! Instruments	RadiPowerRP R3006W	17100015SNO31	Sep. 11, 2020	Sep. 10, 2021
	DARE!! Instruments	RadiPowerRP R3006W	17100015SNO33	Sep. 11, 2020	Sep. 10, 2021
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 06, 2020	Jul. 05, 2021
EMI Test Receiver	Rohde & Schwarz	ESPI	100010/007	Jul. 06, 2020	Jul. 05, 2021
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Mar. 01, 2020	Feb. 28, 2022
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar. 01, 2020	Feb. 28, 2022
Pre-amplifier	Sonoma	310N	185903	Feb. 24, 2021	Feb. 25, 2022
Pre-amplifier	HP	8449B	3008A00849	Feb. 24, 2021	Feb. 25, 2022
Cable	HUBER+SUHNER	100	SUCOFLEX	Mar. 01, 2020	Feb. 28, 2022
Temp. & Humidity Chamber	ZHONG ZHI	CZ-A-225D	HW08053	Jul. 06, 2020	Jul. 05, 2021
DC Power Supply	MATRIX	MPS-3005L-3	D806050W	Jul. 06, 2020	Jul. 05, 2021
AC Power Supply	HengJie	HPC-1110	2010007	Jul. 06, 2020	Jul. 05, 2021

## 5 RF Output Power

### 5.1 Test Standard and Limit

#### 5.1.1 Test Standard


ETSI EN 300 328 V2.2.2:2019 clause 4.3.1.2

#### 5.1.2 Test Limit


Requirement for	Limit
Adaptive Frequency Hopping Equipment	≤20 dBm
Non-adaptive Frequency Hopping Equipment	≤The value declared by the supplier and shall be ≤20 dBm

### 5.2 Test Setup

Normal Condition



Extreme Condition

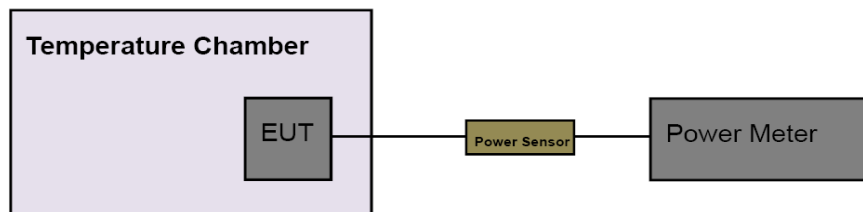

### 5.3 Test Procedure

**Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.2**

- The EUT was connected to RF power meter via a broadband power sensor as show the block above. Use the following settings:
  - Sample speed 1 MS/s.
  - The samples shall represent the RMS power of the signal.
- Recorded the highest of all P<sub>burst</sub> values as “A” dBm.

Between the start and stop times of each individual burst calculate the RMS power over the burst using the formula below. Save these P<sub>burst</sub> values, as well as the start and stop times for each burst.

$$P_{burst} = \frac{1}{k} \sum_{n=1}^k P_{sample}(n)$$

With ‘k’ being the total of samples and ‘n’ the actual sample number

- The RF Output Power (P) shall be calculated using the formula below:

$$P=A+G+Y.$$

“A” dBm: The highest of all  $P_{burst}$  values be used for maximum e.i.r.p calculations.

“G” dBi: The antenna assembly gain in dBi of the individual antenna.

“Y” dB: The beamforming Gain in dB.

4. The measurement shall be repeated at the lowest, the middle, and the highest channel of the stated frequency range. These measurements shall also be performed at the normal and the extreme test conditions.

#### 5.4 Deviation From Test Standard

No deviation

#### 5.5 Test Data

Please refer to the Attachment A.

## 6 Duty Cycle, Tx-Seqency, Tx-gap

### 6.1 Test Standard and Limit

#### 6.1.1 Test Standard

ETSI EN 300 328 V2.2.2:2019 clause 4.3.1.3

#### 6.1.2 Test Limit

	Limit
FHSS equipment	The maximum Tx-sequence time shall be 5 ms while the minimum Tx-gap time shall be 5 ms. For non-adaptive FHSS equipment: Duty Cycle shall be equal to or less than the maximum value declared by the supplier.

### 6.2 Deviation From Test Standard

No deviation

### 6.3 Test Result

These requirements do not apply for equipment with a maximum declared RF Output power of less than 10 dBm e.i.r.p or for equipment when operating in a mode where the RF Output power is less than 10 dBm e.i.r.p.

**Note:**

The Equipment e.i.r.p. power is less than 10 dBm, so no requirement for this test item.

## 7 Accumulated Transmit time, Frequency Occupation and Hopping Sequence

### 7.1 Test Standard and Limit

#### 7.1.1 Test Standard

ETSI EN 300 328 V2.2.2:2019 clause 4.3.1.4

#### 7.1.2 Limits


<b>Non-adaptive frequency hopping equipment</b>
<p><b>Accumulated Transmit Time:</b> on any hopping frequency shall not be greater than 15 ms within any observation period of 15 ms multiplied by the minimum number of hopping frequencies (N) that have to be used. Non-adaptive medical devices requiring reverse compatibility with other medical devices placed on the market that are compliant with version 1.7.1 or earlier versions of ETSI EN 300 328, are allowed to have an operating mode in which the maximum Accumulated Transmit Time is 400 ms within any observation period of 400 ms multiplied by the minimum number of hopping frequencies (N) that have to be used, only when communicating to these legacy devices already placed on the market.</p>
<p><b>Frequency Occupation:</b> It shall meet either of the following two options: Option 1: Each hopping frequency of the hopping sequence shall be occupied at least once within a period not exceeding four times the product of the dwell time and the number of hopping frequencies in use.  Option 2: The occupation probability for each frequency shall be between <math>((1 / U) \times 25 \%)</math> and 77 % where U is the number of hopping frequencies in use.</p>
<p><b>Hopping Sequence(s):</b> The hopping sequence(s) shall contain at least N hopping frequencies where N is either 5 or the result of 15 MHz divided by the minimum Hopping Frequency Separation in MHz, whichever is the greater.</p>
<b>Adaptive frequency hopping equipment</b>
<p>Adaptive Frequency Hopping equipment shall be capable of operating over a minimum of 70% of the band specified in clause 1.</p>
<p><b>Accumulated Transmit Time:</b> on any hopping frequency shall not be greater than 400 ms within any observation period of 400 ms multiplied by the minimum number of hopping frequencies (N) that have to be used.</p>
<p><b>Frequency Occupation:</b> It shall meet either of the following two options: Option 1: Each hopping frequency of the hopping sequence shall be occupied at least once within a period not exceeding four times the product of the dwell time and the number of hopping frequencies in use. Option 2: The occupation probability for each frequency shall be between <math>((1 / U)</math></p>

x 25 %) and 77 % where U is the number of hopping frequencies in use. The hopping sequence(s) shall contain at least N hopping frequencies where N is 15 or 15 divided by the minimum Hopping Frequency Separation in MHz, whichever is the greater.

**Hopping Sequence(s):**

The hopping sequence(s) shall contain at least N hopping frequencies where N is 15 or 15 divided by the minimum Hopping Frequency Separation in MHz, whichever is the greater.

## 7.2 Test Setup



## 7.3 Test Procedure

**Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.4**

1. The transmitter output was connected to the spectrum analyzer.
2. The analyzer shall be set as follows:
  - Centre frequency: Equal to the hopping frequency being investigated
  - Frequency Span: 0 Hz
  - RBW: ~ 50% of the Occupied Channel Bandwidth
  - VBW:  $\geq$ RBW
  - Detector: MAX Peak
  - Sweep time: Equal to the applicable observation period (see clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2)
  - Number of sweep points: 30 000
  - Trace mode: Clear/ Write
  - Trigger: Free Run
3. NOTE 1: This step is only applicable for equipment implementing Option 1 in clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2 for complying with the Frequency Occupation requirement and the manufacturer decides to demonstrate compliance with this requirement via measurement.
4. Make the following changes on the analyser and repeat step 2:
  - Sweep time:  $4 \times$  Dwell Time  $\times$  Actual number of hopping frequencies in useThe hopping frequencies occupied by the equipment without having transmissions during the dwell time (blacklisted frequencies) should be taken into account in the actual number of hopping frequencies in use. If this number cannot be determined (number of blacklisted frequencies unknown) it shall be assumed that the equipment uses the maximum possible number of hopping frequencies.  
The result shall be compared to the limit for the Frequency Occupation defined in clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2. The result of this comparison shall be recorded in the test report.
5. The analyzer shall be set as follows:

- Start frequency: 2400 MHz
- Stop frequency: 2483.5 MHz
- RBW: ~ 50% of the Occupied Channel Bandwidth (single hopping frequency)
- VBW:  $\geq$ RBW
- Detector: MAX Peak
- Sweep time: Auto
- Trace mode: Max Hold
- Trigger: Free Run

6. Wait for the trace to stabilize. Identify the number of hopping frequencies used by the hopping sequence.

The result shall be compared to the limit (value N) defined in clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2. This value shall be recorded in the test report.

For equipment with blacklisted frequencies, it might not be possible to verify the number of hopping frequencies in use. However they shall comply with the requirement for Accumulated Transmit Time and Frequency Occupation assuming the minimum number of hopping frequencies (N) defined in clause 4.3.1.4.3.1 or clause 4.3.1.4.3.2 is used.

7. For adaptive equipment, using the lowest and highest -20 dB points from the total spectrum envelope obtained in step 6, it shall be verified whether the equipment uses 70 % of the band specified in clause 1. The result shall be recorded in the test report.

#### 7.4 Deviation From Test Standard

No deviation

#### 7.5 Test Data

Please refer to the Attachment B.

## 8 Hopping Frequency Separation

### 8.1 Test Standard and Limit


#### 8.1.1 Test Standard

ETSI EN 300 328 V2.2.2:2019 clause 4.3.1.5

#### 8.1.2 Limits

Test Item	Frequency Range (MHz)	Limit	Result
Hopping Channel Separation (Non-adaptive)	2400-2483.5	Occupied Channel Bandwidth or 100 kHz which is greater	N/A
Hopping Channel Separation (Adaptive)		100 kHz	PASS

### 8.2 Test Setup



### 8.3 Test Procedure

**Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.5**

1. The transmitter output was connected to the spectrum analyzer.
2. Set the spectrum analyzer as follows.
  - Centre Frequency : Centre of the two adjacent hopping frequencies
  - Frequency Span: Sufficient to see the complete envelope of both hopping frequencies
  - Resolution BW : 1% of the span
  - Video BW : 3\*RBW
  - Detector : Max Peak
  - Trace Mode : Max Hold.
  - Sweep time : Auto

### 8.4 Deviation From Test Standard

No deviation

### 8.5 Test Data

Please refer to the Attachment C.

## 9 Occupied Channel Bandwidth

### 9.1 Test Standard and Limit


#### 9.1.1 Test Standard

ETSI EN 300 328 V2.2.2:2019 clause 4.3.1.8

#### 9.1.2 Limits

Test Item	Frequency Range (MHz)	Limit	Result
Occupied Bandwidth	2400-2483.5	Fall completely within the Operation Band	Pass
		For non-adaptive Frequency Hopping equipment with e.i.r.p greater than 10 dBm, the occupied Bandwidth shall equal to or less than the value declared by the supplier, and shall not greater than 5 MHz.	

### 9.2 Test Setup



### 9.3 Test Procedure

**Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.7**

- The transmitter output was connected to the spectrum analyzer.
- Set the spectrum analyzer as follows to measure the occupied channel bandwidth.
  - Centre Frequency: The centre frequency of the channel under test.
  - Resolution BW : ~1% of the span without going below 1%.
  - Video BW : 3\*RBW
  - Frequency Span for frequency hopping equipment:  
Lowest frequency separation that is used within the hopping sequence
  - Frequency Span for other types of equipment: 2\* Nominal Channel Bandwidth
  - Detector : Max Peak.
  - Trace Mode : Max Hold.
  - Sweep time : Auto.
- Wait for the trace to stabilize.  
Find the peak value of the trace and place the analyzer marker on this peak.
- Use the 99% bandwidth function of the spectrum analyser to measure the occupied channel bandwidth of the EUT. This value shall be record.
- The measurement shall be performed only on the lowest and the highest frequency within the stated frequency range. The frequencies on which the tests were performed shall be recorded.

#### 9.4 Test Data

Please refer to the Attachment D.

#### 9.5 Deviation From Test Standard

No deviation

## 10 Medium Utilisation (MU) factor

### 10.1 Test Standard and Limit

#### 10.1.1 Test Standard

ETSI EN 300 328 V2.2.2:2019 clause 4.3.1.6

#### 10.1.2 Test Limit

Test Item	Limit
Medium Utilisation Factor	Less than 10%

The Medium Utilisation (MU) factor is a measure to quantify the amount of resources (Power and Time) used by non-adaptive equipment. The Medium Utilisation factor is defined by the formula:

$$MU = (P/100 \text{ mW}) * DC$$

Where: MU is Medium Utilisation factor in %.

P is the RF output power as defined in clause 4.3.1.1.1 expressed in mW.

DC is the Duty Cycle as defined in clause 4.3.1.2.1 expressed in %.

### 10.2 Deviation From Test Standard

No deviation

### 10.3 Test Result

This requirement does not apply to adaptive equipment unless operating in non-adaptive mode.

In addition, this requirement does not apply for equipment with a maximum declared RF Output power level of less than 10 dBm e.i.r.p. for equipment when operating in a mode where the RF Output power is less than 10 dBm e.i.r.p.

The Equipment e.i.r.p. power is less than 10 dBm, So no requirement for this test item.

## 11 Adaptivity (Adaptive Frequency Hopping)

### 11.1 Test Standard and Limit

#### 11.1.1 Test Standard

ETSI EN 300 328 V2.2.2:2019 clause 4.3.1.7

#### 11.1.2 Test Description

Adaptive Frequency Hopping equipment is allowed to operate in a non-adaptive mode providing it complies with the requirements applicable to non-adaptive frequency hopping equipment.

Adaptive Frequency Hopping equipment is allowed to have Short Control Signaling Transmissions (e.g. ACK/NACK signals, etc.) without sensing the frequency for the presence of other signals. Please see clause 4.3.1.6.3 Short Control Signaling Transmissions

Adaptive Frequency Hopping (AFH) equipment uses a Detect And Avoid (DAA) mechanism which allows an equipment to adapt to its environment by identifying frequencies, that are being used by other equipment.

Adaptive frequency Hopping systems shall implement either of the DAA mechanisms provided in clauses 4.3.1.6.1 Adaptive Frequency Hopping Using LBT based DAA or 4.3.1.6.2 Adaptive Frequency Hopping Using other forms of DAA (non-LBT based)

### 11.2 Test Result

This requirement does not apply to non-adaptive equipment or adaptive equipment operating in a non-adaptive mode providing the equipment complies with the requirements and /or restrictions applicable to non-adaptive equipment.

In addition, this requirement does not apply for equipment with a maximum declared RF Output power level of less than 10 dBm e.i.r.p. for equipment when operating in a mode where the RF Output power is less than 10 dBm e.i.r.p.

**Note:**

The Equipment e.i.r.p. power is less than 10 dBm, so no requirement for this test item.

## 12 Transmitter Unwanted Emissions in the out-of-band domain


### 12.1 Test Standard and Limit

#### 12.1.1 Test Standard


ETSI EN 300 328 V2.2.2:2019 clause 4.3.1.9

#### 12.1.2 Limits

The transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask in figure 1 of clause 4.3.1.9.3

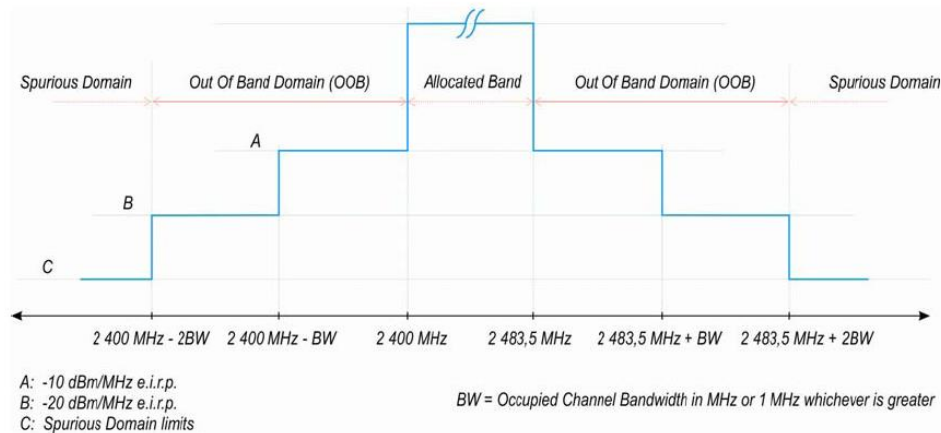

### 12.2 Test Setup



### 12.3 Test Procedure

**Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.8**

Step 1:

(1) The transmitter output was connected to the spectrum analyzer.

Set the spectrum analyzer as following:

- Centre Frequency: 2484 MHz.
- Span: 0 Hz
- Resolution BW : 1 MHz
- Filter mode: Channel filter
- Video BW : 3 MHz
- Detector Mode: RMS
- Trace Mode : Max Hold

- Sweep Mode: Continuous
- Sweep Points : Sweep Time [s] / (1  $\mu$  s) or 5 000 whichever is greater
- Trigger Mode: Video trigger; in case video triggering is not possible, an external trigger source maybe used
- Sweep Time: > 120 % of the duration of the longest burst detected during the measurement of the RF Output Power

Step 2 (2483.5 MHz to 2483.5 MHz +BW):

- (1) Adjust trigger level to select the transmissions with the highest power level.
- (2) The highest power level shall be selected.
- (3) Set a window to match with the start and end of the burst and in which the RMS Power shall be measured using the Time Domain Power Function.
- (4) RMS Power within this 1 MHz segment (2483.5 MHz to 2484.5 MHz). Compare this value the applicable limit provided by the mask.
- (5) Increase the centre frequency in steps of 1 MHz and repeat this measurement for every 1 MHz segment within the range 2483.5 MHz to 2483.5 MHz+BW. The centre frequency of the last 1 MHz segment within the range 2483.5 MHz to 2483.5 MHz +BW. The centre frequency of the last 1 MHz segment shall be set to 2483.5 MHz+BW-0.5 MHz (which means this may partly overlap with the previous 1 MHz segment).

Step 3 (2483.5 MHz +BW to 2483.5 MHz +2BW):

- (1) Change the centre frequency of the analyzer to 2484MHz + BW and perform the measurement for the first 1MHz segment within range 2483.5MHz +BW to 2483.5 MHz +2BW. Increase the centre frequency in 1MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2483.5 MHz+ 2BW-0.5 MHz.

Step 4 (2400 MHz-BW to 2400 MHz):

- (1) Change the centre frequency of the analyzer to 2399.5MHz and perform the measurement for the first 1MHz segment within range 2400 MHz -BW to 2400 MHz Reduce the centre frequency in 1MHz steps and repeat the measurement to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2400 MHz -BW+ 0.5 MHz.

Step 5 (2400 MHz-BW to 2400 MHz):

- (1) Change the centre frequency of the analyzer to 2399.5MHz-BW and perform the measurement for the first 1MHz segment within range 2400 MHz -2BW to 2400 MHz -BW. Reduce the centre frequency in 1MHz steps and repeat the measurement to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2400 MHz -2BW+ 0.5 MHz.

Step 6:

- In case of conducted measurements on equipment with a single transmit chain, the declared antenna assembly gain G in dBi shall be added to the results for each of the 1 MHz segments and compared with the limits provided by the mask given in figure 1 or figure 3. If more than one antenna assembly is intended for this power setting, the antenna with the highest gain shall be considered.
- In case of conducted measurements on smart antenna systems (equipment with multiple transmit chains), the measurements need to be repeated for each of the active transmit chains. The declared antenna assembly gain G in dBi for a single antenna shall be added to these results. If more than one antenna assembly is intended

for this power setting, the antenna with the highest gain shall be considered. Comparison with the applicable limits shall be done using any of the options given below:

- Option 1: the results for each of the transmit chains for the corresponding 1 MHz segments shall be added. The additional beamforming gain  $Y$  in dB shall be added as well and the resulting values compared with the limits provided by the mask given in figure 1 or figure 3.
- Option 2: the limits provided by the mask given in figure 1 or figure 3 shall be reduced by  $10 \times \log_{10}(A_{ch})$  and the additional beamforming gain  $Y$  in dB. The results for each of the transmit chains shall be individually compared with these reduced limits.

NOTE:  $A_{ch}$  refers to the number of active transmit chains.

It shall be recorded whether the equipment complies with the mask provided in figure 1 or figure 3.

## 12.4 Deviation From Test Standard

No deviation

## 12.5 Test Data

Please refer to the Attachment E.

## 13 Transmitter Unwanted Spurious Emissions in the Spurious Domain

### 13.1 Test Standard and Limit

#### 13.1.1 Test Standard

ETSI EN 300 328 V2.2.2:2019 clause 4.3.1.10


#### 13.1.2 Limits

**Transmitter limits for spurious emissions**


Frequency Range	Maximum Power, e.r.p.( $\leq 1$ GHz) e.i.r.p.( $> 1$ GHz)	Bandwidth
30 MHz to 47 MHz	-36 dBm	100 kHz
47 MHz to 74 MHz	-54 dBm	100 kHz
74 MHz to 87.5 MHz	-36 dBm	100 kHz
87.5 MHz to 118 MHz	-54 dBm	100 kHz
118 MHz to 174 MHz	-36 dBm	100 kHz
174 MHz to 230 MHz	-54 dBm	100 kHz
230 MHz to 470 MHz	-36 dBm	100 kHz
470 MHz to 694 MHz	-54 dBm	100 kHz
694 MHz to 1 GHz	-36 dBm	100 kHz
Above 1 GHz to 12.75 GHz	-30 dBm	1 MHz

13.2 Test Setup

(A) Radiated Emission Test Set-Up Frequency Bellow 1 GHz.

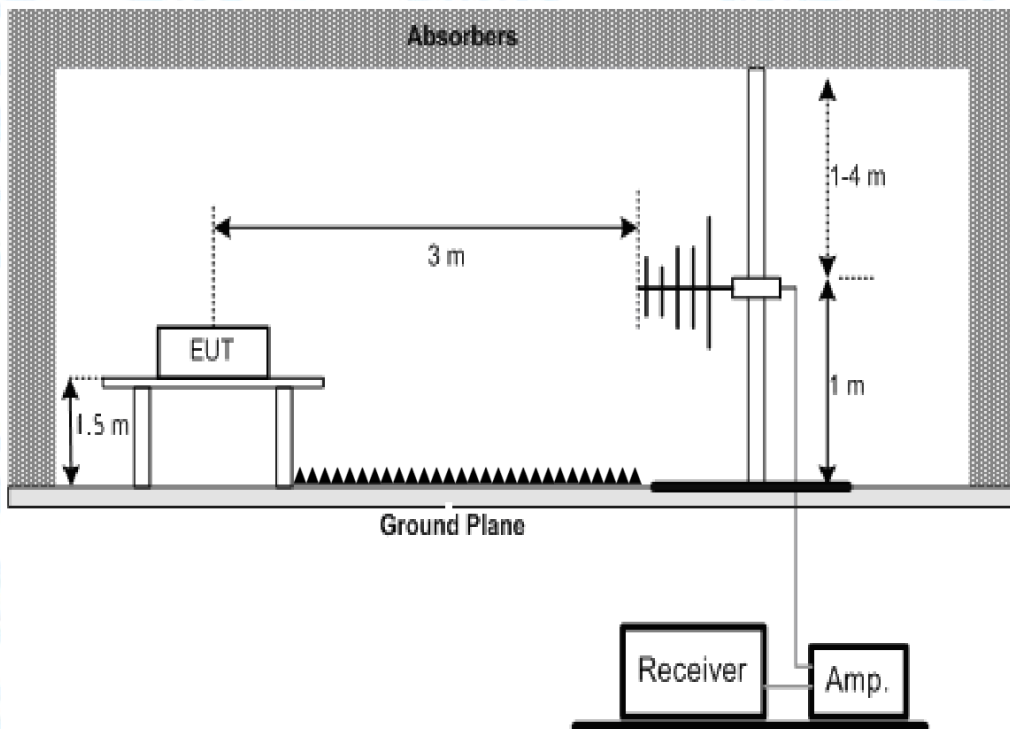

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz.

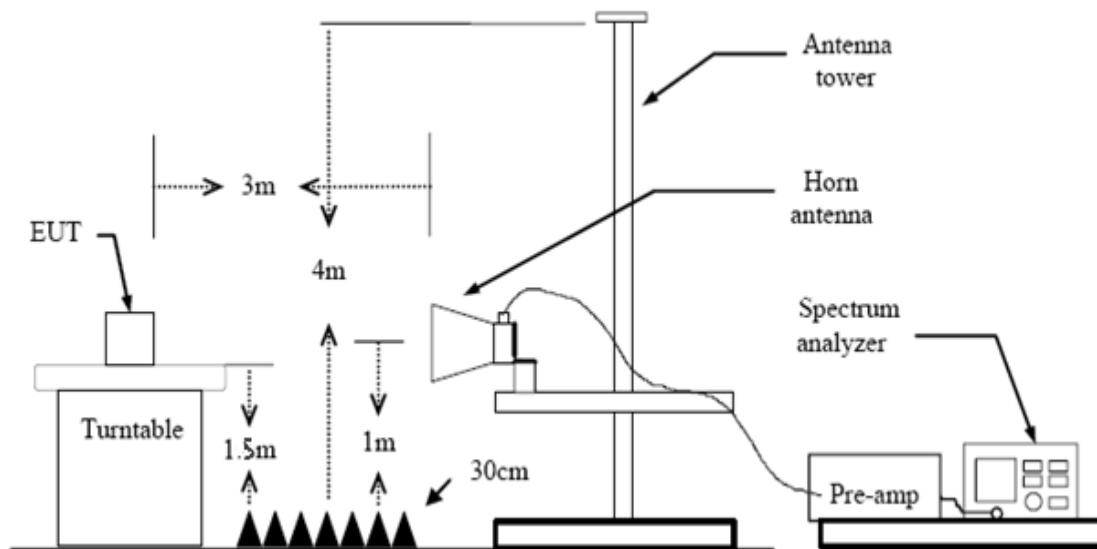

### 13.3 Test Procedure

**Please refer to refer to ETSI EN 300 328 (V2.2.2) clause 5.4.9**

1. The EUT was placed on the top of the turntable in chamber.
2. The test shall be made in the transmitting mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. Set the spectrum analyzer as follows to measure the emissions (Bellow 1 GHz):
  - Resolution BW : 100 kHz.
  - Video BW :300 kHz.
  - Detector : Peak.
  - Trace Mode : Max Hold.
  - Filter type: 3 dB (Gaussian)
  - Sweep Points :  $\geq 19400$
  - Sweep Time : Auto
4. Set the spectrum analyzer as follows to measure the emissions (Above 1 GHz):
  - Resolution BW : 1 MHz.
  - Video BW :3 MHz.
  - Detector : Peak.
  - Trace Mode : Max Hold.
  - Filter type: 3 dB (Gaussian)
  - Sweep Points :  $\geq 23500$
  - Sweep time : Auto
5. For 30~1000MHz spurious emissions measurement, the broad band bi-log receiving antenna was placed 3 meters far away from the turntable. .
6. The broadband receiving antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization. Each recorded suspected value is indicated as Read Level (Raw).
7. Replace the EUT by standard antenna and feed the RF port by signal generator.
8. Adjust the frequency of the signal generator to the suspected emission and slightly rotate the turntable to locate the position with maximum reading.
9. Adjust the power level of the signal generator to reach the same reading with Read Level (Raw).
10. The level of the spurious emission is the power level of (g) plus the gain of the standard antenna in dBi and minus the loss of the cable used between the signal generator and the standard antenna.
11. If the measuring emissions that exceed the level of 6 dB below the applicable limit, the resolution bandwidth shall be switched to 30 kHz and the span shall be adjusted accordingly. If the level does not change by more than 2 dB, it is a narrowband emission; the observed value shall be recorded. If the level changes by more than 2 dB, the emission is a wideband emission and its level shall be measured and recorded.
12. The measurement shall be repeated at the lowest and the highest channel of the stated frequency range.

#### 13.4 Deviation From Test Standard

No deviation

#### 13.5 Test Data

Please refer to the Attachment F.

## 14 Receiver Spurious Emissions

### 14.1 Test Standard and Limit

#### 14.1.1 Test Standard

ETSI EN 300 328 V2.2.2:2019 clause 4.3.1.11


#### 14.1.2 Limits

#### Spurious emission limits for receivers


Frequency Range	Maximum Power, e.r.p.( $\leq 1$ GHz) e.i.r.p.( $> 1$ GHz)	Bandwidth
30 MHz to 1 GHz	-57 dBm	100 kHz
1 GHz to 12.75 GHz	-47 dBm	1 MHz

### 14.2 Test Setup

(A) Radiated Emission Test Set-Up Frequency Bellow 1 GHz.

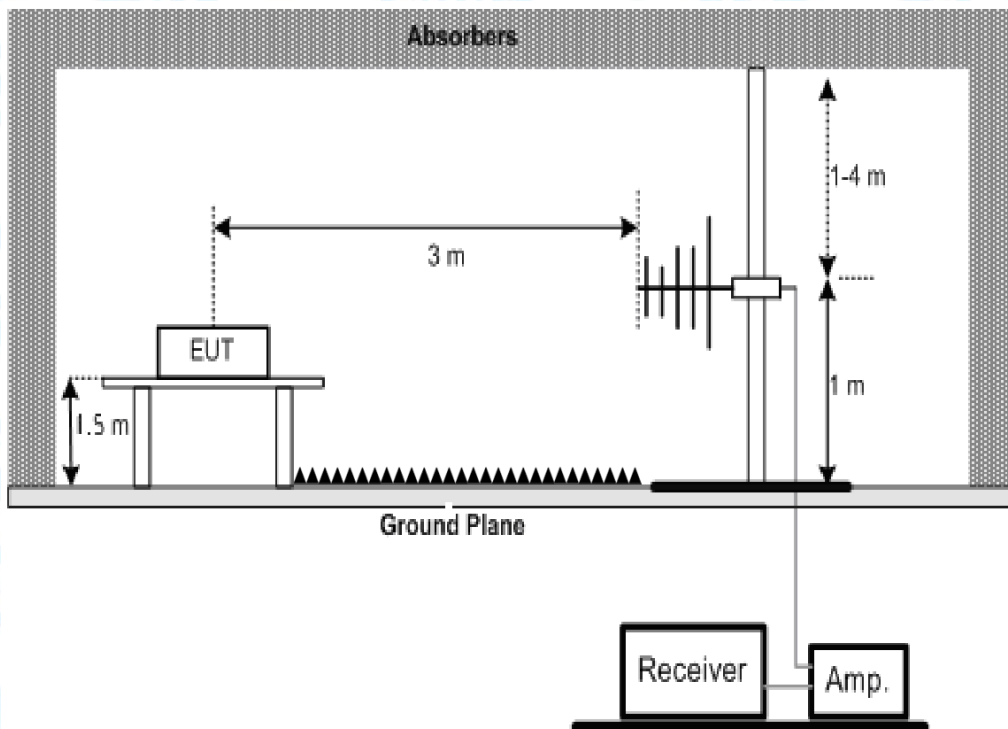

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz.

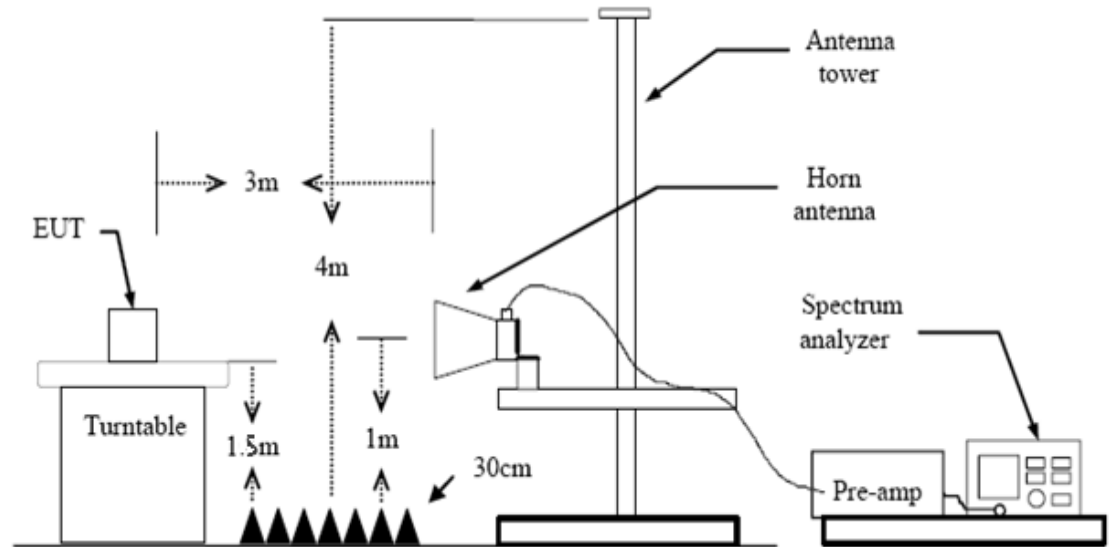

### 14.3 Test Procedure

#### Please refer to refer to ETSI EN 300 328 (V2.2.2) clause 5.4.10

1. The EUT was placed on the top of the turntable in chamber.
2. The test shall be made in the transmitting mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. Set the spectrum analyzer as follows to measure the emissions (Bellow 1 GHz):
  - Resolution BW : 100 kHz.
  - Video BW :300 kHz.
  - Detector : Peak.
  - Trace Mode : Max Hold.
  - Filter type: 3 dB (Gaussian)
  - Sweep Points :  $\geq 19400$
  - Sweep Time : Auto
4. Set the spectrum analyzer as follows to measure the emissions (Above 1 GHz):
  - Resolution BW : 1 MHz.
  - Video BW :3 MHz.
  - Detector : Peak.
  - Filter type: 3 dB (Gaussian)
  - Sweep Points :  $\geq 23500$
  - Sweep Time : Auto
5. For 30~1000MHz spurious emissions measurement, the broad band bi-log receiving antenna was placed 3 meters far away from the turntable. .
6. The broadband receiving antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization. Each recorded suspected value is indicated as Read Level (Raw).
7. Replace the EUT by standard antenna and feed the RF port by signal generator.
8. Adjust the frequency of the signal generator to the suspected emission and slightly rotate the turntable to locate the position with maximum reading.

9. Adjust the power level of the signal generator to reach the same reading with Read Level (Raw).
10. The level of the spurious emission is the power level of (g) plus the gain of the standard antenna in dBi and minus the loss of the cable used between the signal generator and the standard antenna.
11. If the measuring emissions that exceed the level of 6 dB below the applicable limit, the resolution bandwidth shall be switched to 30 kHz and the span shall be adjusted accordingly. If the level does not change by more than 2 dB, it is a narrowband emission; the observed value shall be recorded. If the level changes by more than 2 dB, the emission is a wideband emission and its level shall be measured and recorded.
12. The measurement shall be repeated at the lowest and the highest channel of the stated frequency range.

#### 14.4 Deviation From Test Standard

No deviation

#### 14.5 Test Data

Please refer to the Attachment G.

## 15 Receiver Blocking

### 15.1 Test Standard and Limit

#### 15.1.1 Test Standard

ETSI EN 300 328 V2.2.2:2019 clause 4.3.1.12

#### 15.1.2 Test Definition

Receiver blocking is a measure of the ability of the equipment to receive a wanted signal on its operating channel without exceeding a given degradation in the presence of an unwanted signal (blocking signal) on frequencies other than those of the operating band provided in table.

#### Service frequency bands

	Service frequency bands
Transmit	2 400 MHz to 2 483,5 MHz
Receive	2 400 MHz to 2 483,5 MHz

#### 15.1.3 Test Limits

While maintaining the minimum performance criteria as defined in clause 4.3.1.12.3, the blocking levels at specified frequency offsets shall be equal to or greater than the limits defined for the applicable receiver category provided in bellow table.

**Table 14: Receiver Blocking parameters for Receiver Category 1 equipment**

Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal
(-133 dBm + 10 × log <sub>10</sub> (OCBW)) or -68 dBm whichever is less (see note 2)	2 380	-34	CW
	2 504		
(-139 dBm + 10 × log <sub>10</sub> (OCBW)) or -74 dBm whichever is less (see note 3)	2 300		
	2 330		
	2 360		
	2 524		
	2 584		
2 674			
NOTE 1: OCBW is in Hz.			
NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P <sub>min</sub> + 26 dB where P <sub>min</sub> is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.			
NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P <sub>min</sub> + 20 dB where P <sub>min</sub> is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.			
NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.			

**Table 15: Receiver Blocking parameters receiver Category 2 equipment**

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
(-139 dBm + 10 × log <sub>10</sub> (OCBW) + 10 dB) or (-74 dBm + 10 dB) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
<p>NOTE 1: OCBW is in Hz.</p> <p>NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P<sub>min</sub> + 26 dB where P<sub>min</sub> is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.</p> <p>NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.</p>			

**Table 16: Receiver Blocking parameters receiver Category 3 equipment**


Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
(-139 dBm + 10 × log <sub>10</sub> (OCBW) + 20 dB) or (-74 dBm + 20 dB) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
<p>NOTE 1: OCBW is in Hz.</p> <p>NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P<sub>min</sub> + 30 dB where P<sub>min</sub> is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.</p> <p>NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.</p>			

Note: Adaptive equipment with a maximum RF output power greater than 10 dBm e.i.r.p. shall be considered as receiver category 1 equipment.

Non-adaptive equipment with a Medium Utilization (MU) factor greater than 1 % and less than or equal to 10 % or adaptive equipment with a maximum RF output power of 10 dBm e.i.r.p. shall be considered as receiver category 2 equipment.

Non-adaptive equipment with a maximum Medium Utilization (MU) factor of 1 % or adaptive equipment with a maximum RF output power of 0 dBm e.i.r.p. shall be considered as receiver category 3 equipment.

15.1.4 Test Setup

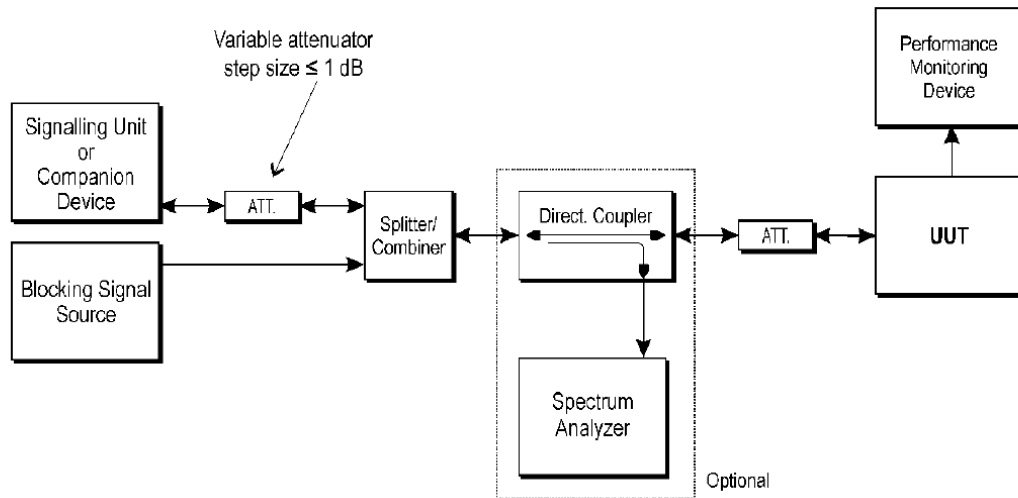

15.2 Test Procedure

**Please refer to ETSI EN 300 328 (V2.2.2) clause 5.4.11**

1. Connect the EUT to the equipment as above.
2. The measurement shall be repeated at the lowest and the highest channel of the stated frequency range.
3. The blocking signal generator is set to the first frequency as defined in the appropriate table corresponding to the receiver category and type of equipment.
4. With the blocking signal generator switched off, a communication link is established between the UUT and the associated companion device using the test setup shown in figure 6. The attenuation of the variable attenuator shall be increased in 1 dB steps to a value at which the minimum performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 is still met. The resulting level for the wanted signal at the input of the UUT is  $P_{min}$ .
- This signal level ( $P_{min}$ ) is increased by the value provided in the table corresponding to the receiver category and type of equipment.
5. The blocking signal at the UUT is set to the level provided in the table corresponding to the receiver category and type of equipment. It shall be verified and recorded in the test report that the performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 is met.
6. Repeat step 5 for each remaining combination of frequency and level for the blocking signal as provided in the table corresponding to the receiver category and type of equipment.

15.3 Deviation From Test Standard

No deviation

15.4 Test Result

Please refer to the Attachment H.

## 16 Geo-location Capability

### 16.1 Standard Requirement

#### 16.1.1 Requirement

ETSI EN 300 328 V2.2.2:2019 Clause 4.3.1.13

#### 16.1.2 Definition

Geo-location capability is a feature of the equipment to determine its geographical location with the purpose to configure itself according to the regulatory requirements applicable at the geographical location where it operates.

The geo-location capability may be present in the equipment or in an external device (temporary) associated with the equipment operating at the same geographical location during the initial power up of the equipment. The geographical location may also be available in equipment already installed and operating at the same geographical location.

#### 16.1.3 Requirements

The geographical location determined by the equipment as defined above, shall not be accessible to the user.

### 16.2 Deviation From Test Standard

No deviation

### 16.3 Test Result

This requirement only applies to equipment with geo-location capability as defined.

**Note:**

The Equipment without the geo-location capability, so no requirement for this test item.

# 17 Photographs – Test Setup

## Radiated Spurious Emission (Above 1 GHz)




## Radiated Spurious Emission (Below 1 GHz)




### Attachment A-- RF Output Power Test Data

<b>Test Conditions:</b>		Continuous Transmitting Mode				
<b>Rel. Humidity:</b>		55%		<b>Pressure:</b>		1010 hPa
Test Mode	Test Conditions	EIRP Power(dBm)			Limit (dBm)	Result
		Low Channel (2402MHz)	Middle Channel (2441MHz)	High Channel (2480MHz)		
GFSK	Tnom, Vnom	<b>3.85</b>	<b>4.1</b>	<b>3.36</b>	<b>20</b>	<b>PASS</b>
	Tmin, Vnom	3.81	3.66	3.21		
	Tmax, Vnom	3.78	3.78	3.22		
Pi/4-DQPSK	Tnom, Vnom	<b>3.99</b>	<b>4.19</b>	<b>3.44</b>		
	Tmin, Vnom	3.94	4.02	3.42		
	Tmax, Vnom	3.92	4.07	3.38		
8-DPSK	Tnom, Vnom	<b>4.19</b>	<b>3.49</b>	<b>4.1</b>		
	Tmin, Vnom	4.17	3.47	3.98		
	Tmax, Vnom	4.08	3.42	3.86		
Remark: EIRP=A+G+Y G=2 dBi Y=0						
Only showed the worst case test plots.						


**GFSK Mode:2402MHz**

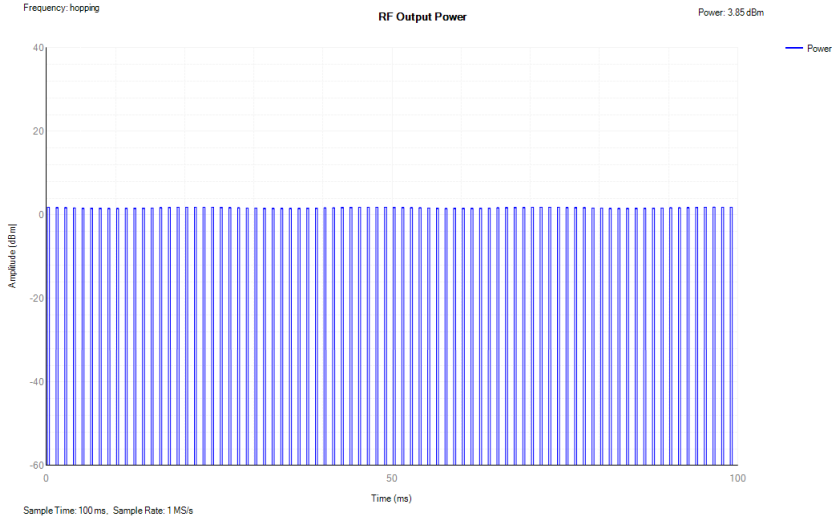


**GFSK Mode:2441MHz**

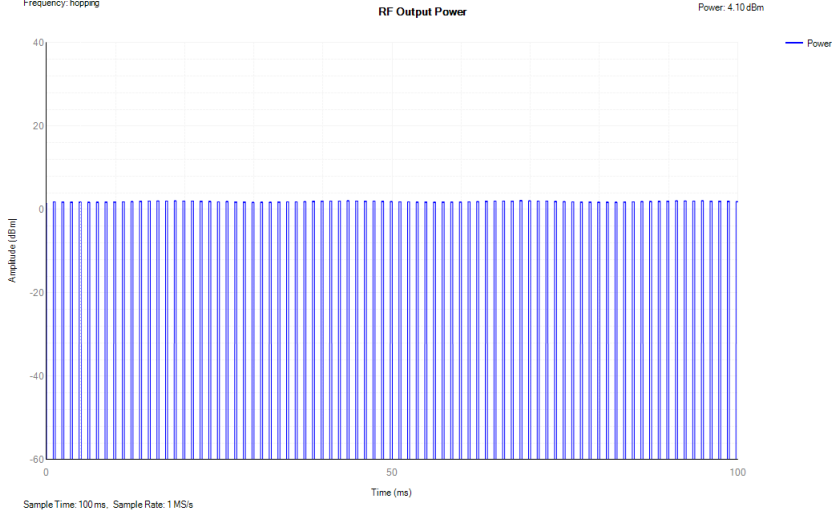


**GFSK Mode:2480MHz**

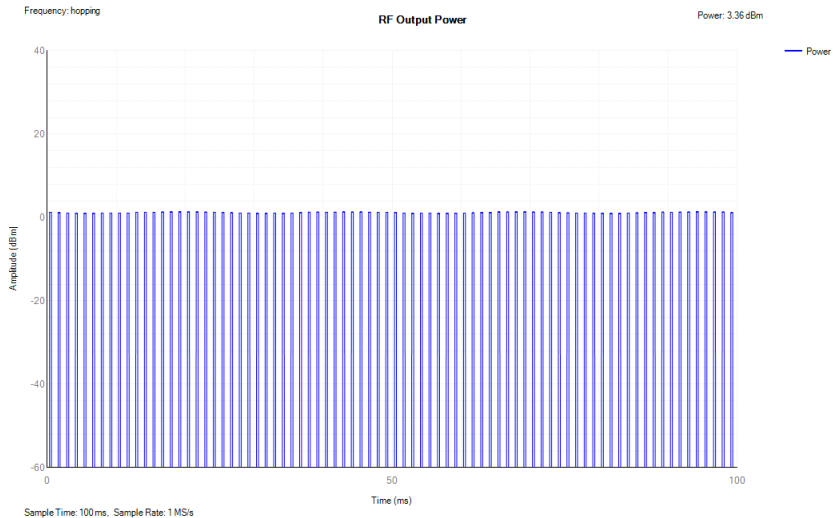


**Pi/4-DQPSK Mode:2402MHz**

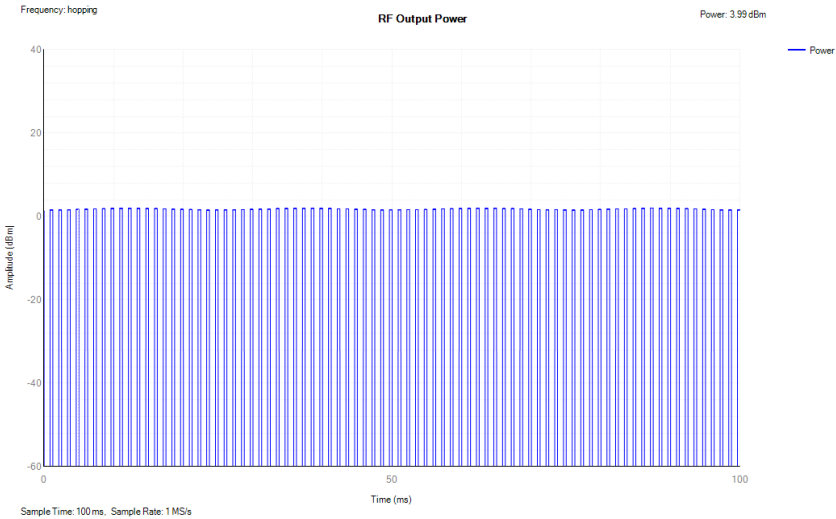


**Pi/4-DQPSK Mode:2441MHz**

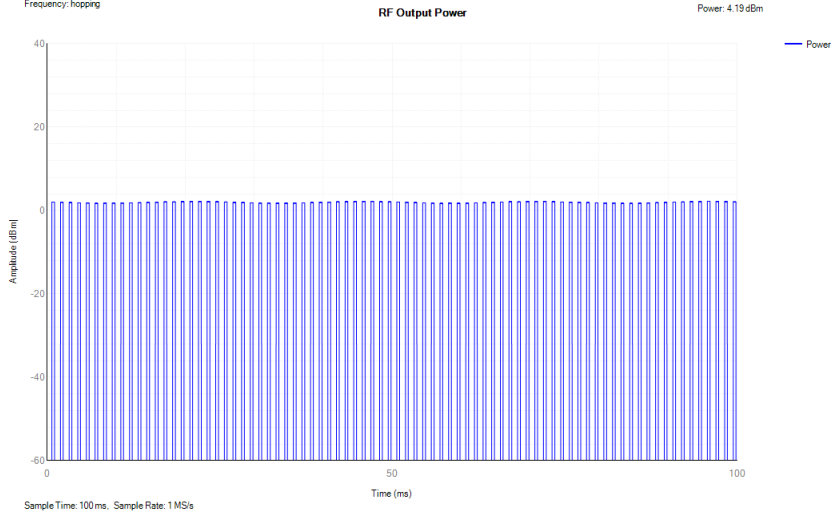


**Pi/4-DQPSK Mode:2480MHz**

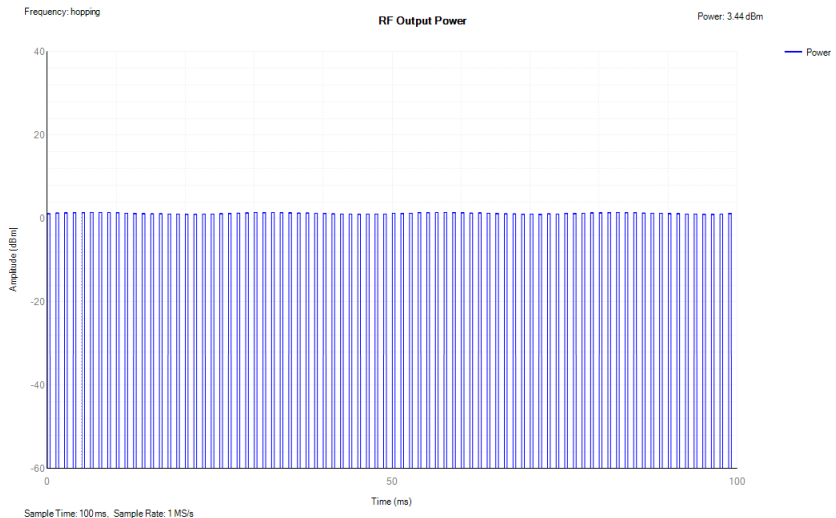


**8-DPSK Mode:2402MHz**

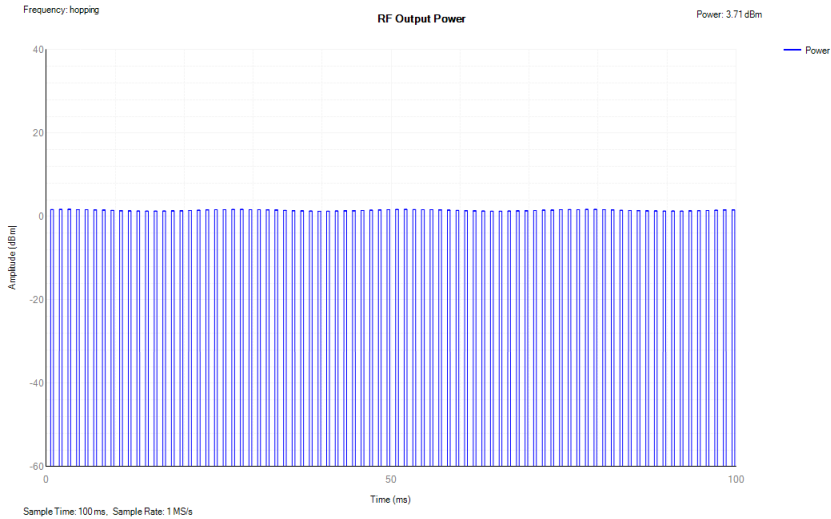

**8-DPSK Mode:2441MHz**

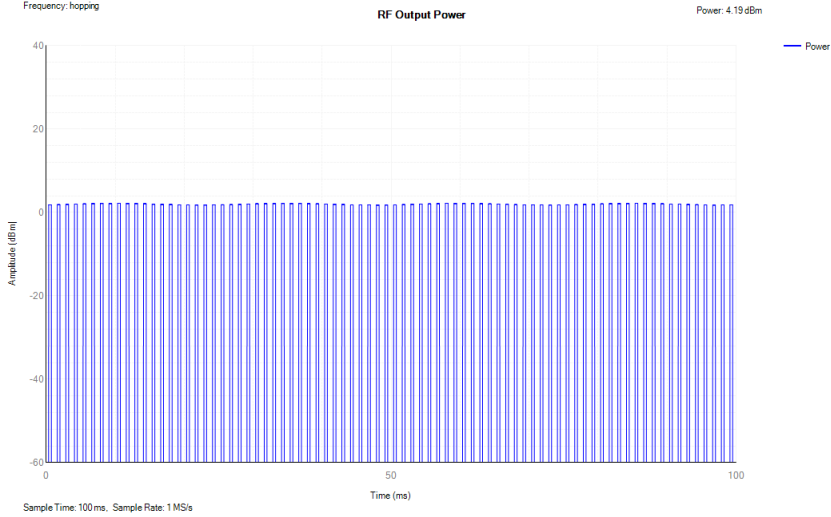

**8-DPSK Mode:2480MHz**

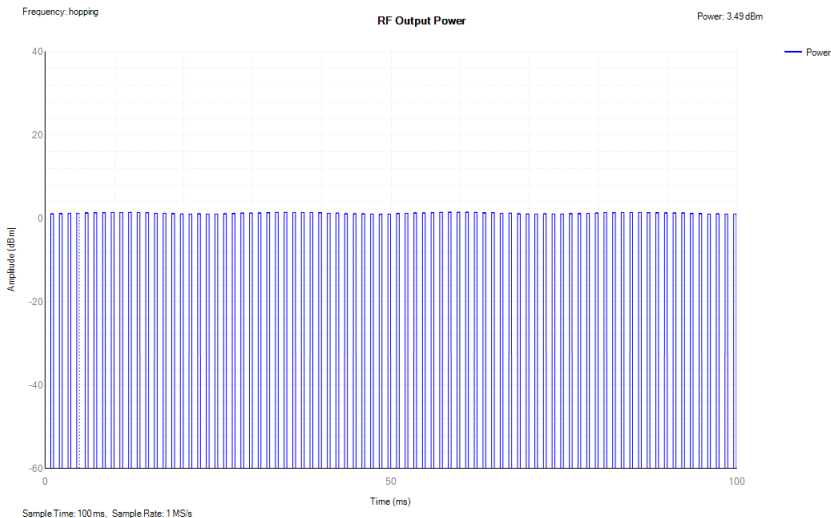


# Attachment B-- Accumulated Transmit time, Frequency Occupation and Hopping Sequence Test Data


## (1) Accumulated Time (only show the worst case 2441MHz)

Frequency (MHz)	Mode	Accumulated Dwell Time (ms)	Limit (ms)	Measure Time (ms)	Burst Number	Result
2441	DH1	92.8	<=400	31600	320	PASS
2441	DH3	98.34	<=400	31600	149	PASS
2441	DH5	116.64	<=400	31600	108	PASS


2441MHz DH1

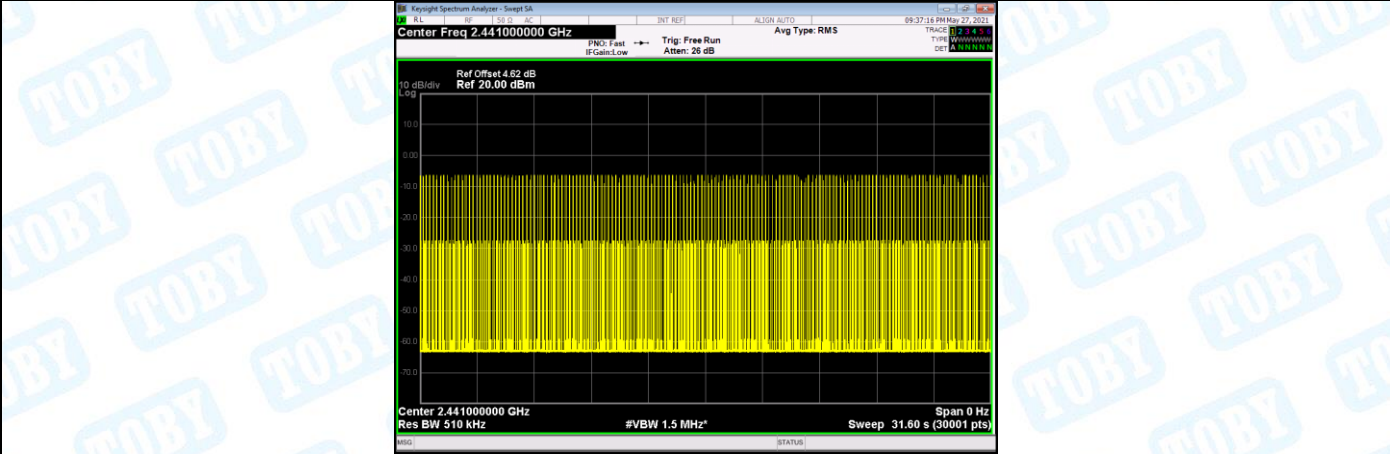

2441MHz DH3

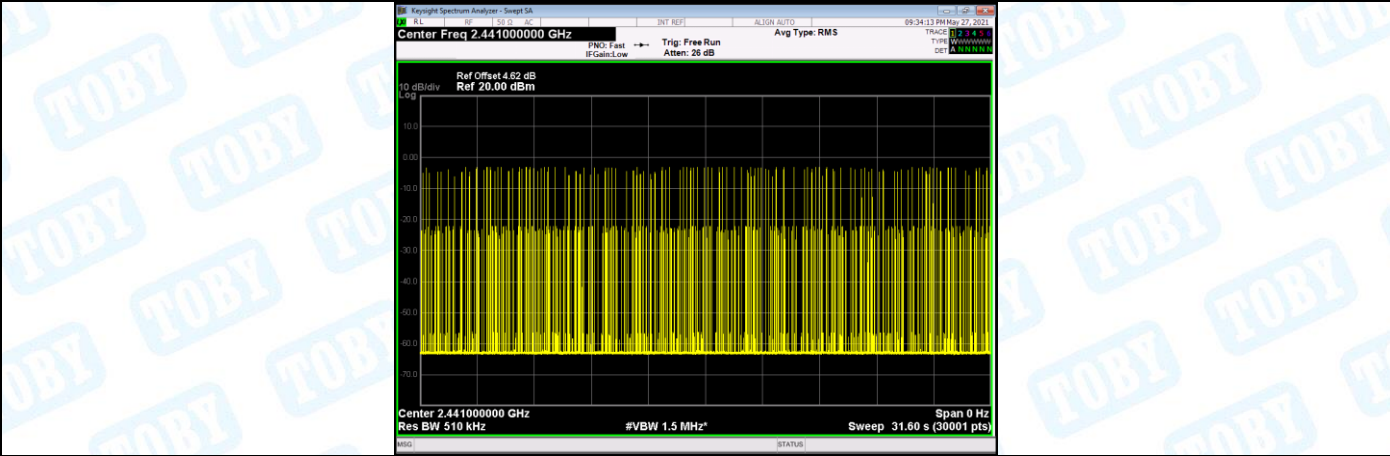


2441MHz DH5

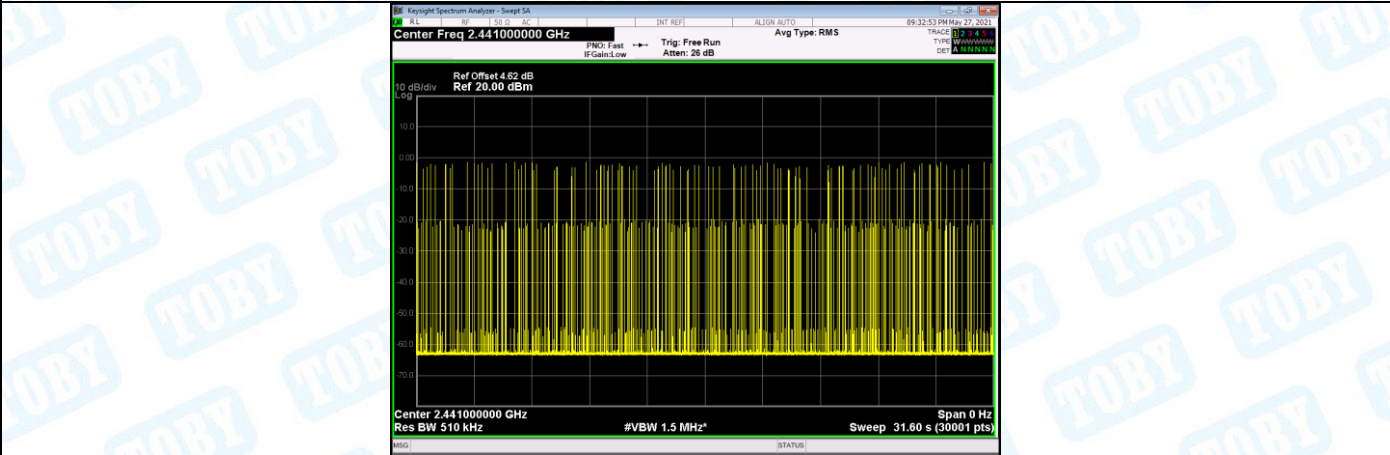


Frequency (MHz)	Mode	Accumulated Dwell Time (ms)	Limit (ms)	Measure Time (ms)	Burst Number	Result
2441	2DH1	124.41	<=400	31600	319	PASS
2441	2DH3	264.04	<=400	31600	161	PASS
2441	2DH5	303.45	<=400	31600	105	PASS


2441MHz 2DH1

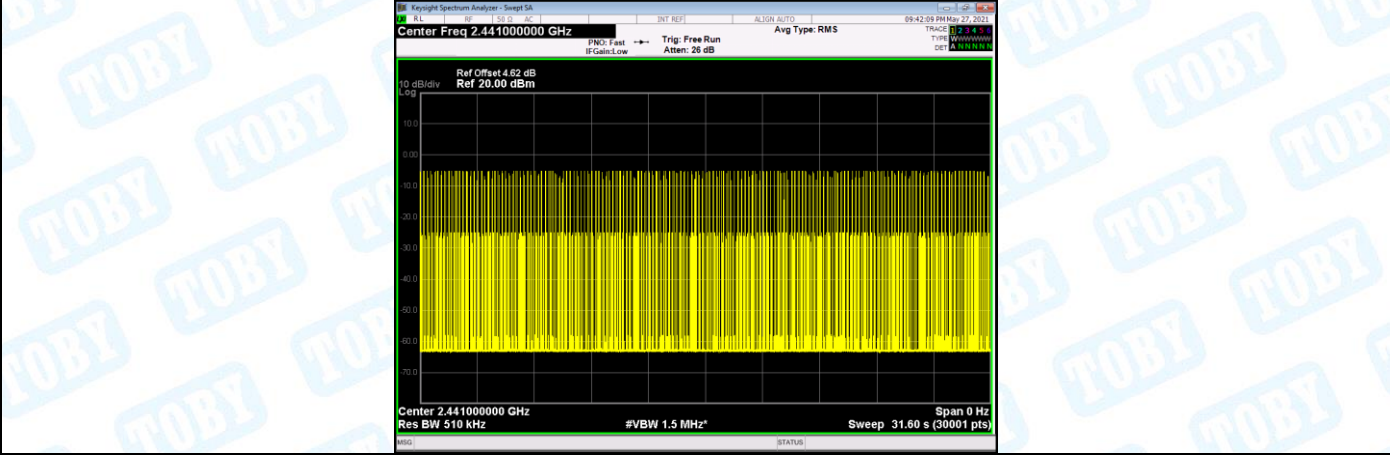

2441MHz 2DH3

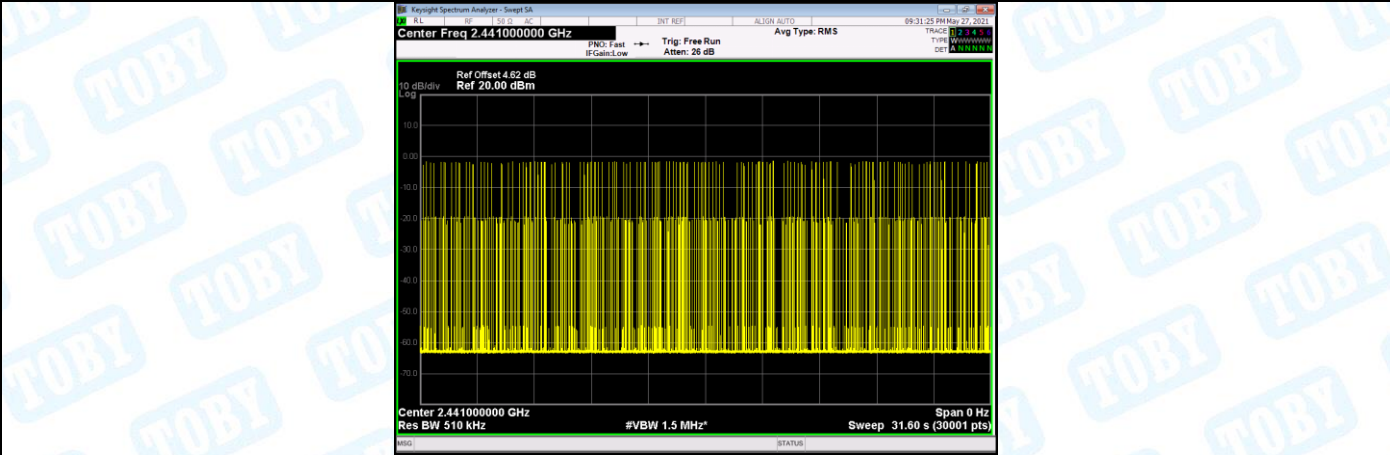


2441MHz 2DH5

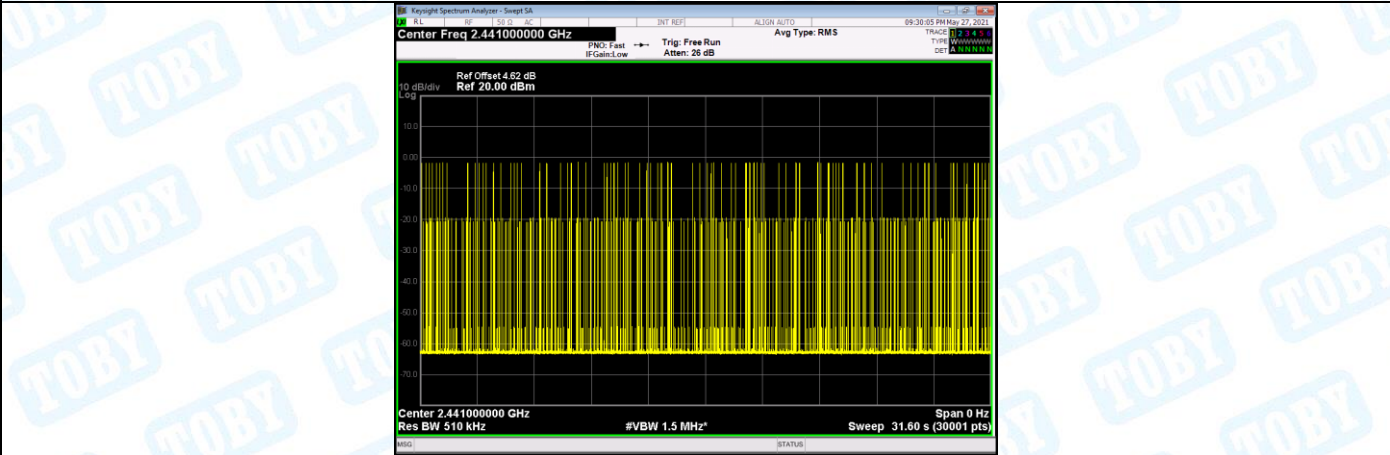


Frequency (MHz)	Mode	Accumulated Dwell Time (ms)	Limit (ms)	Measure Time (ms)	Burst Number	Result
2441	3DH1	124.41	<=400	31600	319	PASS
2441	3DH3	259.12	<=400	31600	158	PASS
2441	3DH5	278.4	<=400	31600	96	PASS


2441MHz 3DH1

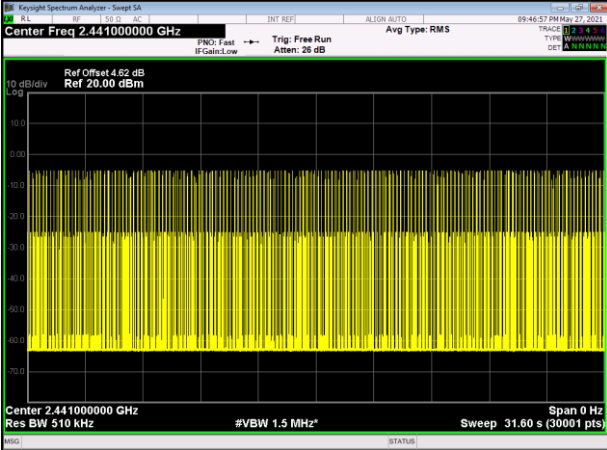

2441MHz 3DH3

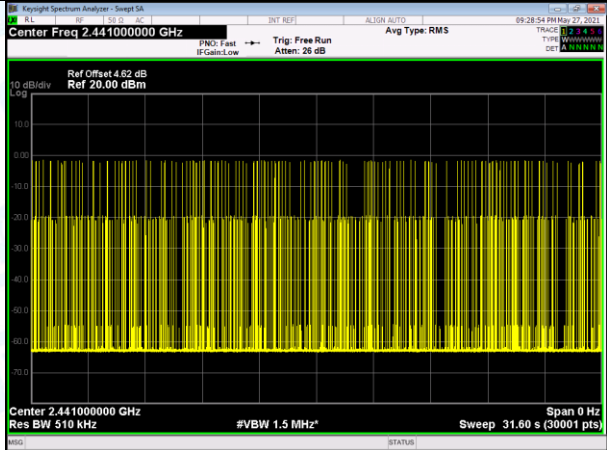

2441MHz 3DH5

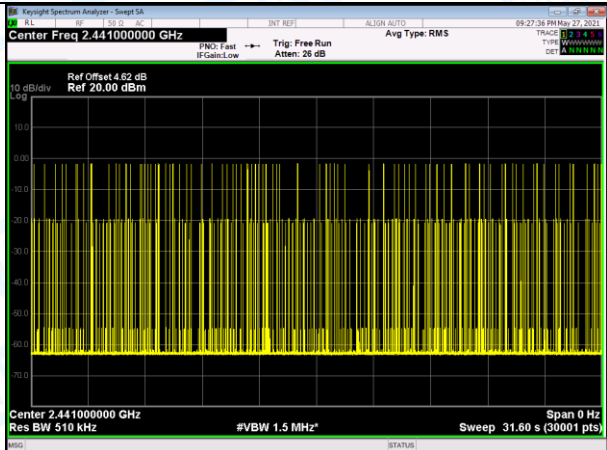


**(2) Frequency Occupation Requirement**


Test Channel	Modulation	Packet	Frequency Occupation requirement	
			Burst Number	Limit (Burst Number)
2441MHz	GFSK	DH1	1	≥1
		DH3	1	≥1
		DH5	1	≥1
2441MHz	Pi/4-DQPSK	2DH1	2	≥1
		2DH3	1	≥1
		2DH5	4	≥1
2441MHz	8DPSK	3DH1	2	≥1
		3DH3	3	≥1
		3DH5	6	≥1

Test Period: 4 X Dwell time X Minimum number of hopping frequencies (N)  
Occupation Time = Time slot length (Dwell time) X Number of data points within a test period


**2441MHz DH1**

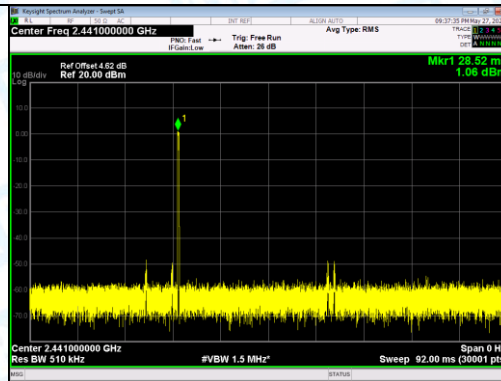


**2441MHz DH3**

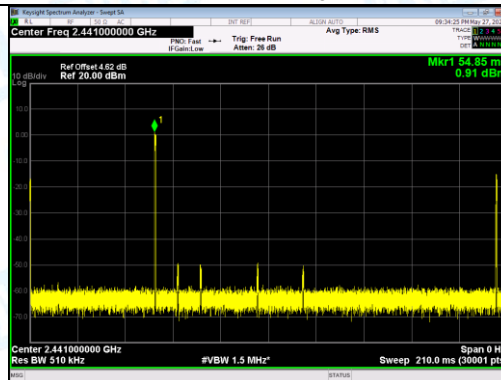


**2441MHz DH5**

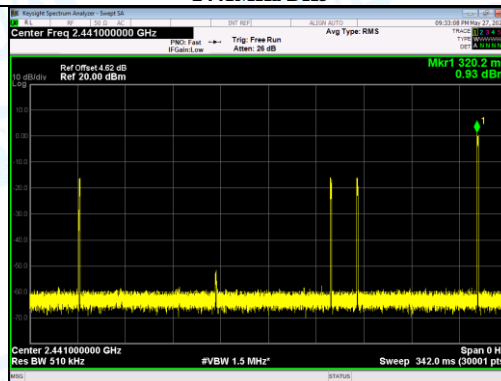


2441MHz 2DH1

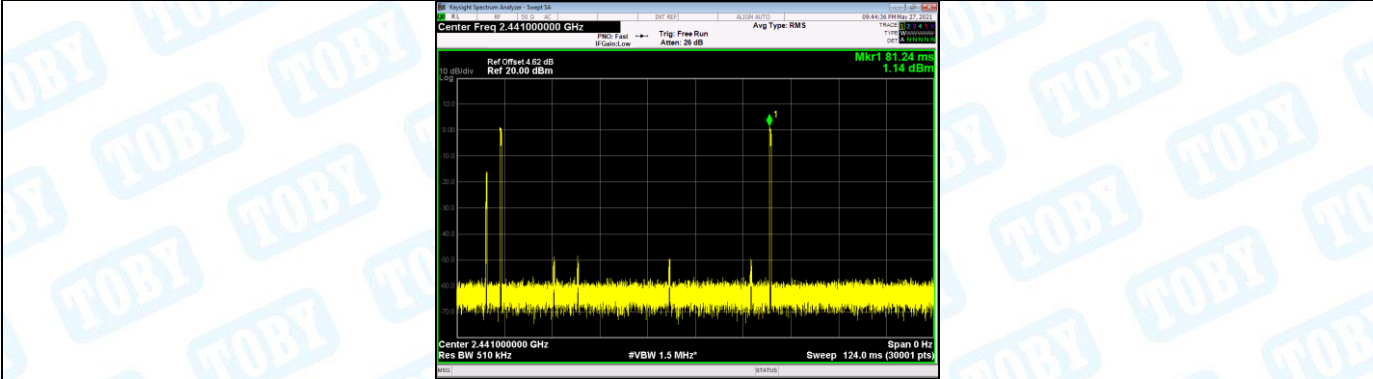


2441MHz 2DH3

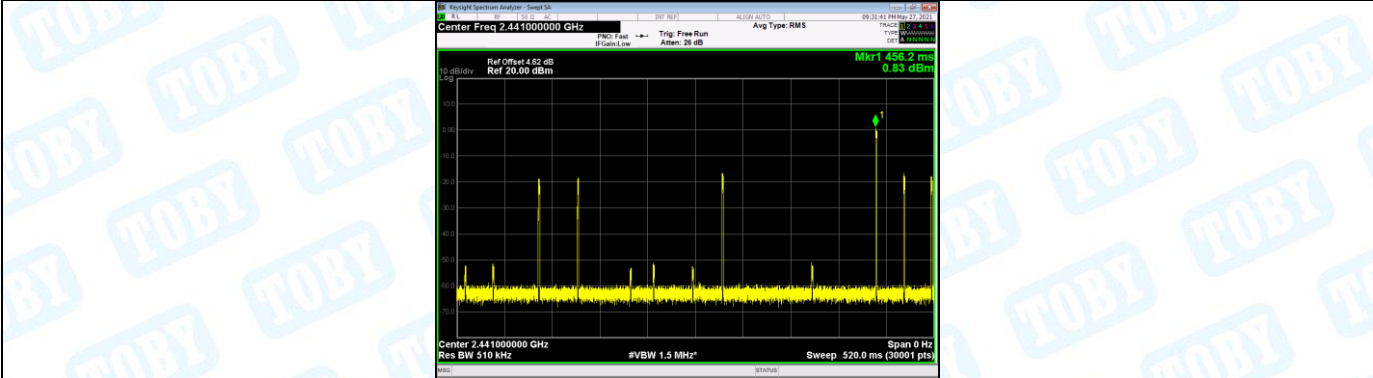


2441MHz 2DH5

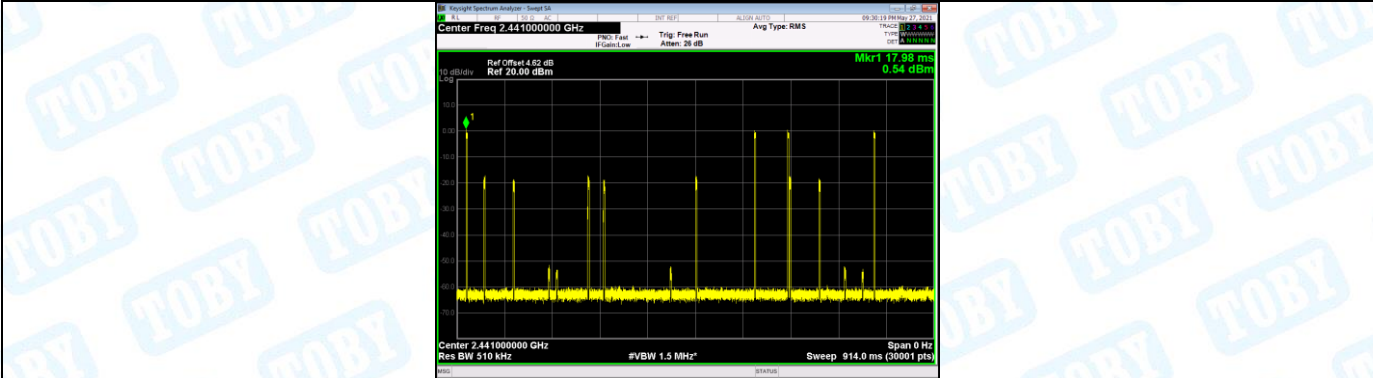


2441MHz 3DH1

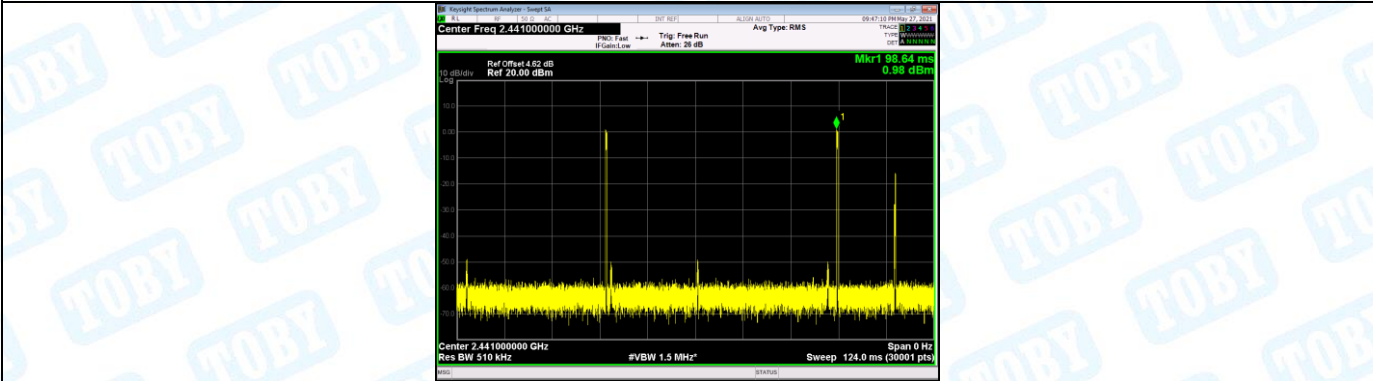

2441MHz 3DH3

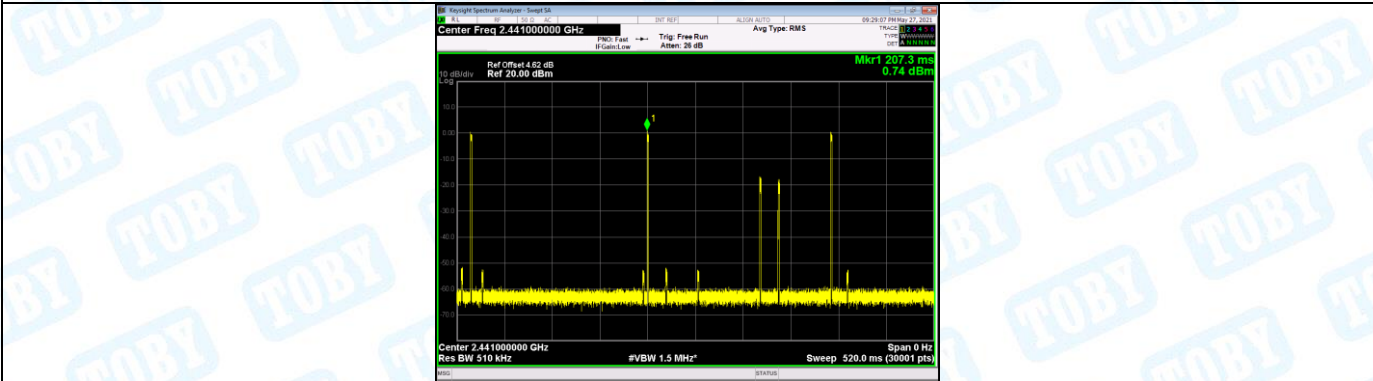


2441MHz 3DH5

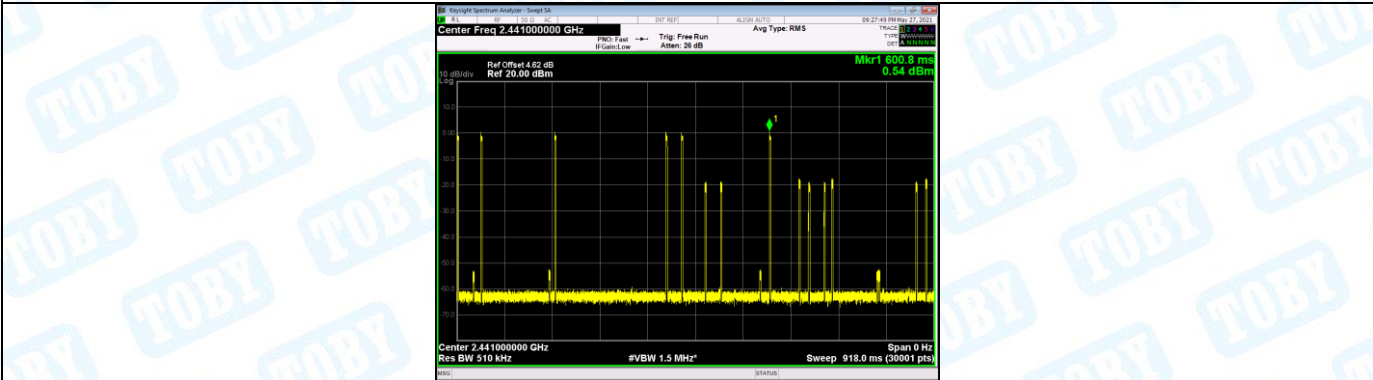

**(3) Hopping Sequence**


Mode: 1 Mbps		
Hopping Channel Frequency Range	Quantity of Hopping Channel	Limit
2402~2480	79	>15
Hopping Sequence (%)		Limit
96%		>70%

**Remark:** 1. For adaptive systems, using the lowest and highest -20 dB points from the total spectrum envelope, it shall be verified whether the system uses 70 % of the band specified.  
2. Hopping Sequence(%) = (20dB BW/83.5)\*100

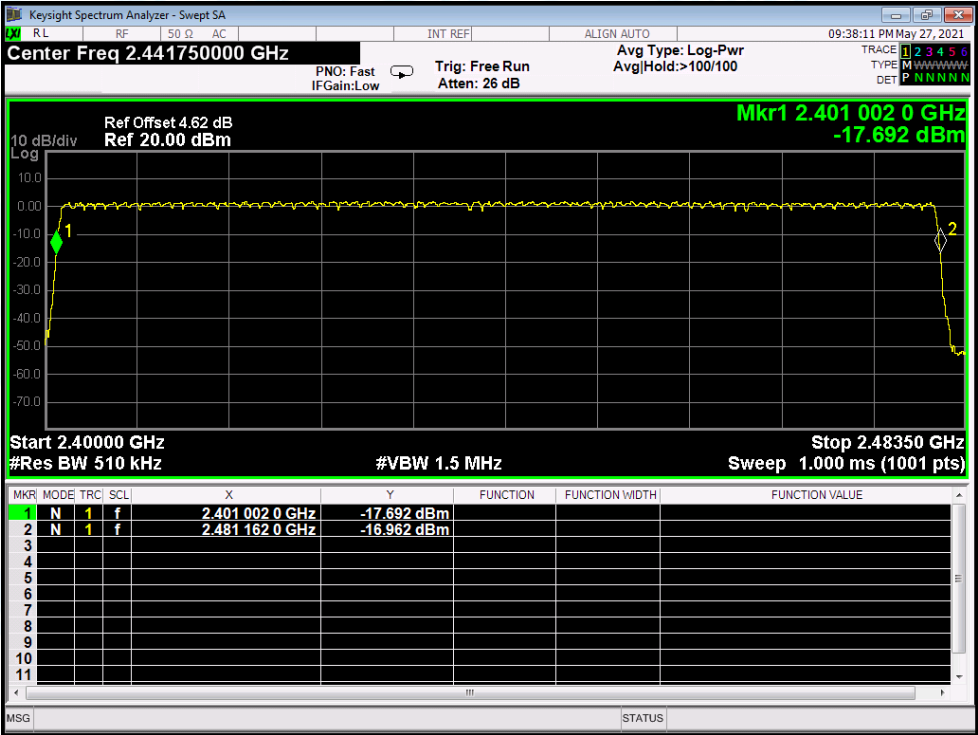


Mode: 2Mbps		
Hopping Channel Frequency Range	Quantity of Hopping Channel	Limit
2402~2480	79	>15
Hopping Sequence (%)		
95.9%		>70%

**Remark:** 1. For adaptive systems, using the lowest and highest -20 dB points from the total spectrum envelope, it shall be verified whether the system uses 70 % of the band specified.  
 2. Hopping Sequence(%) = (20dB BW/83.5)\*100

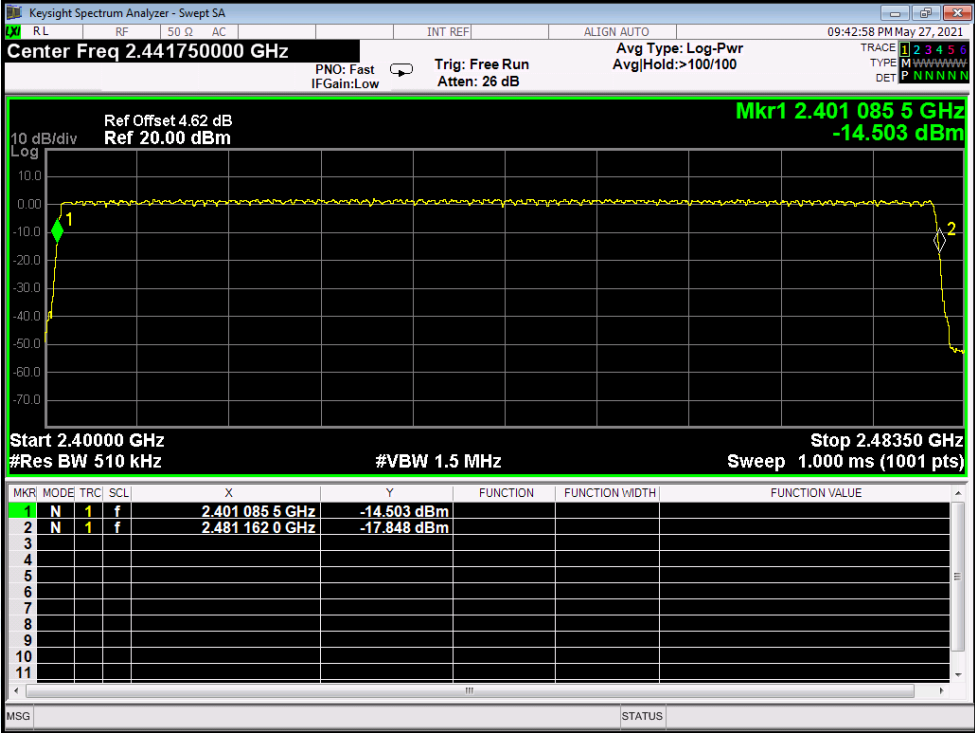

Mode: 3Mbps		
Hopping Channel Frequency Range	Quantity of Hopping Channel	Limit
2402~2480	79	>15
Hopping Sequence (%)	Limit	
96%	>70%	


**Remark:** 1. For adaptive systems, using the lowest and highest -20 dB points from the total spectrum envelope, it shall be verified whether the system uses 70 % of the band specified.  
2. Hopping Sequence(%) = (20dB BW/83.5)\*100

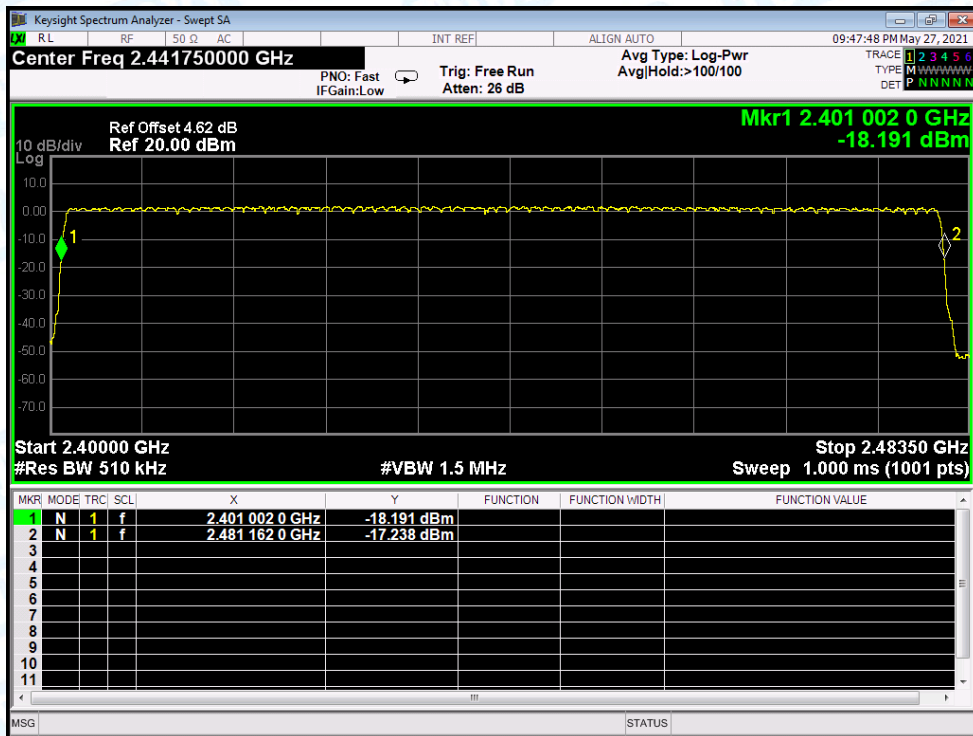


**Attachment C-- Hopping Frequency Separation Test Data**

Temperature:		25 °C		Relative Humidity:		55%	
Test Voltage:		AC 230V					
Test Mode:		Hopping Mode					
Test Mode	Channel frequency (MHz)	Ch. Separation (MHz)	Ch. Separation Limits			Result	
GFSK	2441	0.987	100 kHz			Pass	
Pi/4-DQPSK		0.985					
8DPSK		0.945					


GFSK Hopping Mode

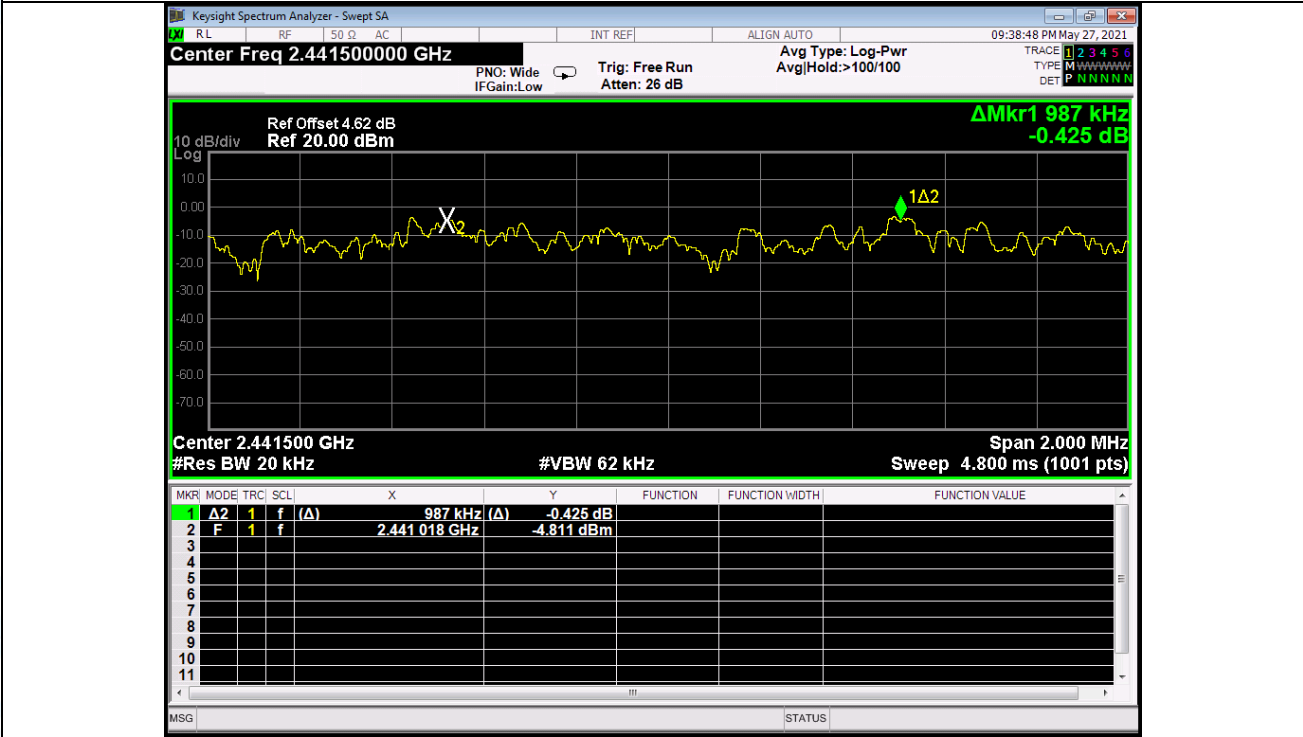

### Pi/4-DQPSK Hopping Mode

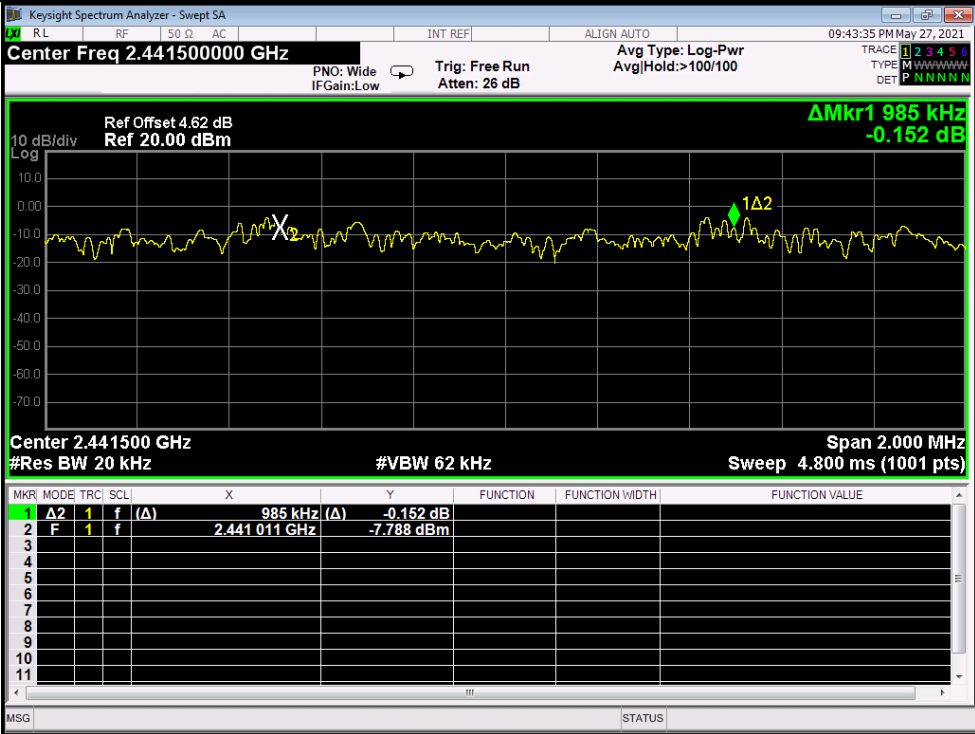

### 8DPSK Hopping Mode

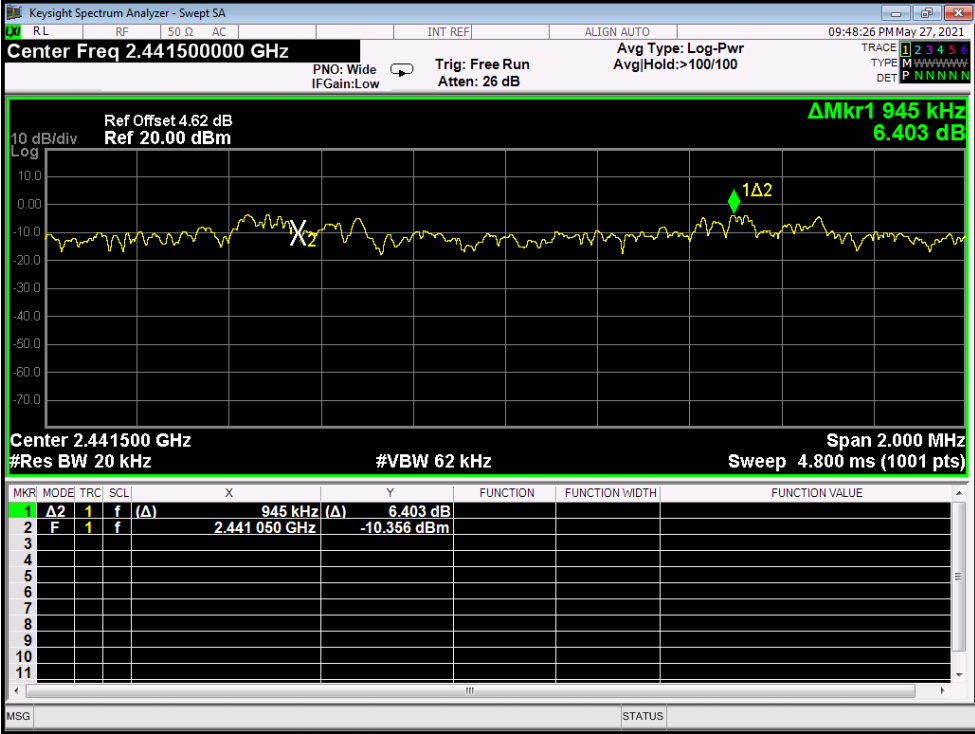


**Attachment D-- Occupied Channel Bandwidth Test Data**

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 230V	Pressure:	1010 hPa
Test Mode:	TX Mode		


**Test Data**

Mode	Frequency (MHz)	99% OBW (MHz)	F <sub>L</sub> Measured Frequency (MHz)	F <sub>H</sub> Measured Frequency (MHz)	Limit (MHz)	Result
GFSK	2402	1.169	2401.409	/	>2400	PASS
	2480	1.169	/	2480.582	<2483.5	PASS
Pi/4-DQPSK	2402	1.179	2401.409	/	>2400	PASS
	2480	1.179	/	2480.592	<2483.5	PASS
8DPSK	2402	1.171	2401.438	/	>2400	PASS
	2480	1.171	/	2480.613	<2483.5	PASS


GFSK-2402 MHz

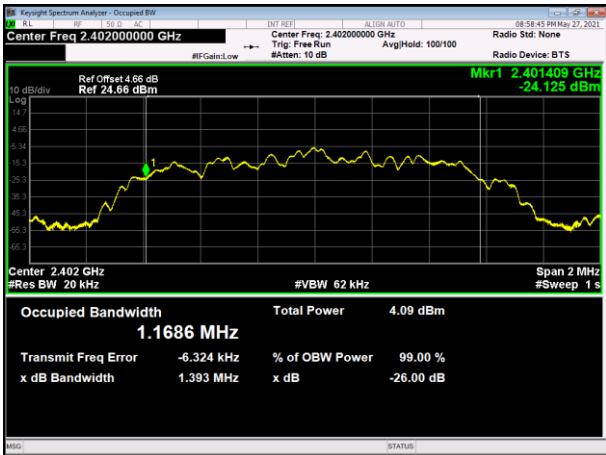


GFSK-2480 MHz

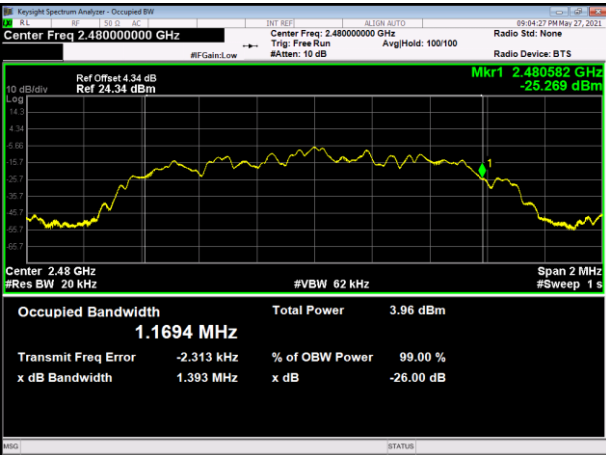


Pi/4-DQPSK -2402 MHz

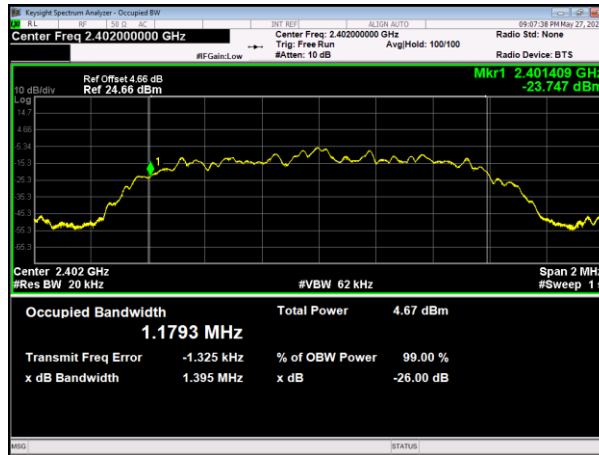


Pi/4-DQPSK -2480 MHz

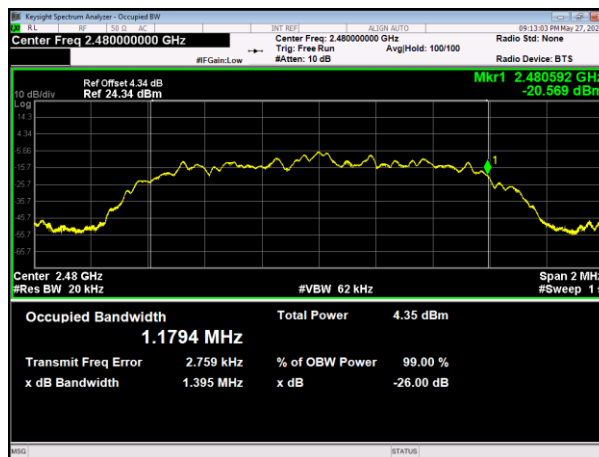

8DPSK -2402 MHz

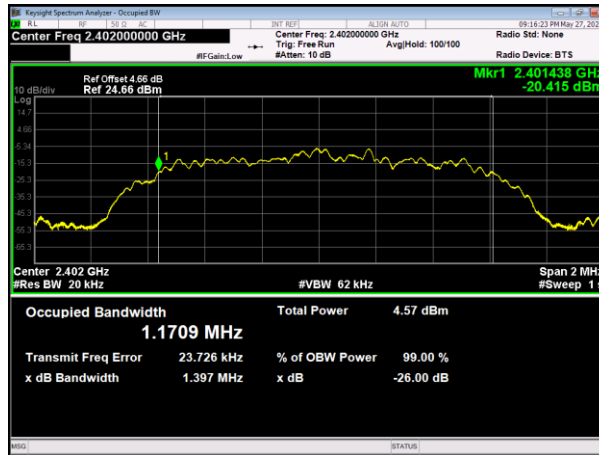

8DPSK -2480 MHz

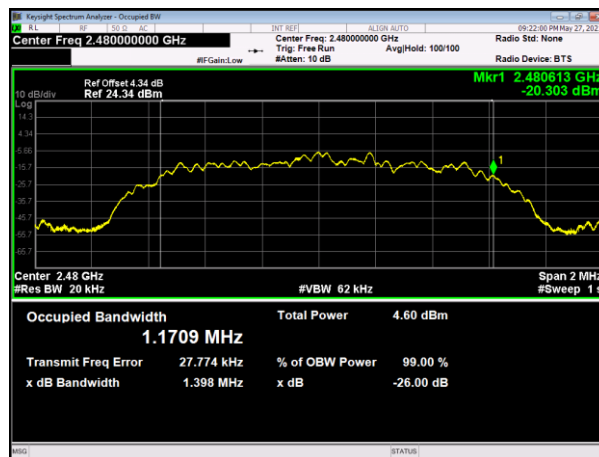


# Attachment E-- Transmitter Unwanted Emissions in the out-of-band domain Test Data

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 230V	Pressure:	1010 hPa
Test Mode:	GFSK Mode		


**Test Data**

Remark: only show the worst test data, the test plots is as follows.

**Low Channel 2402MHz**

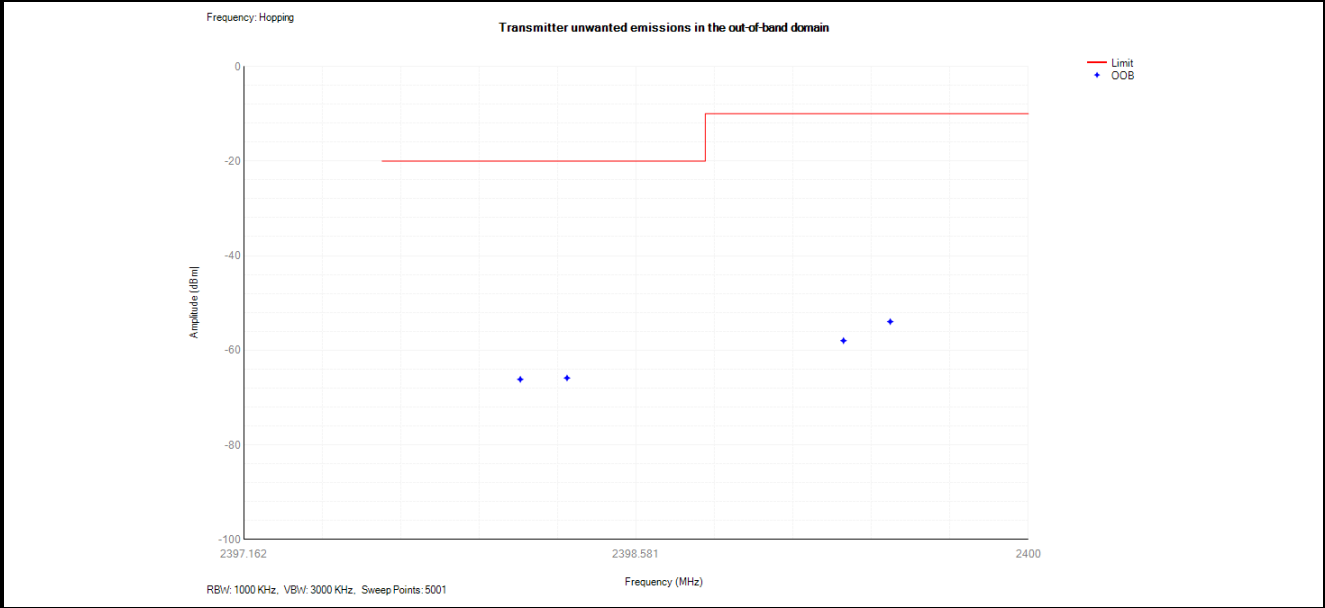

**High Channel 2480MHz**

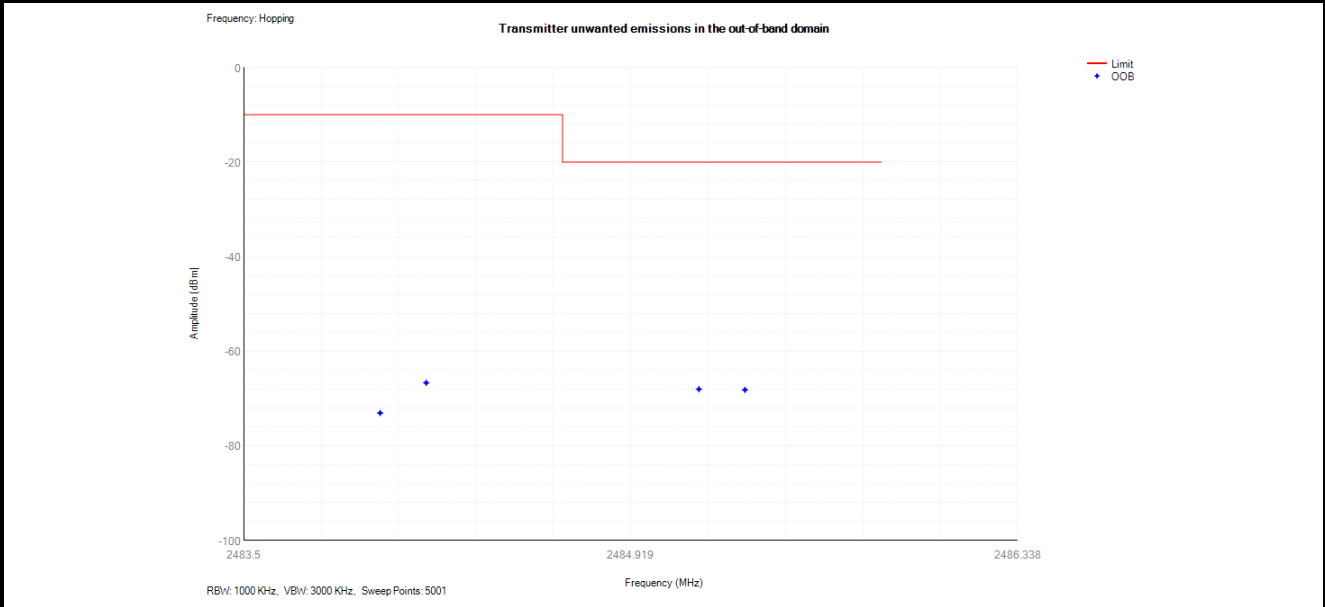


<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 230V	<b>Pressure:</b>	1010 hPa
<b>Test Mode:</b>	Pi/4-DQPSK Mode		


**Test Data**

Remark: only show the worst test data, the test plots is as follows.

**Low Channel 2402MHz**

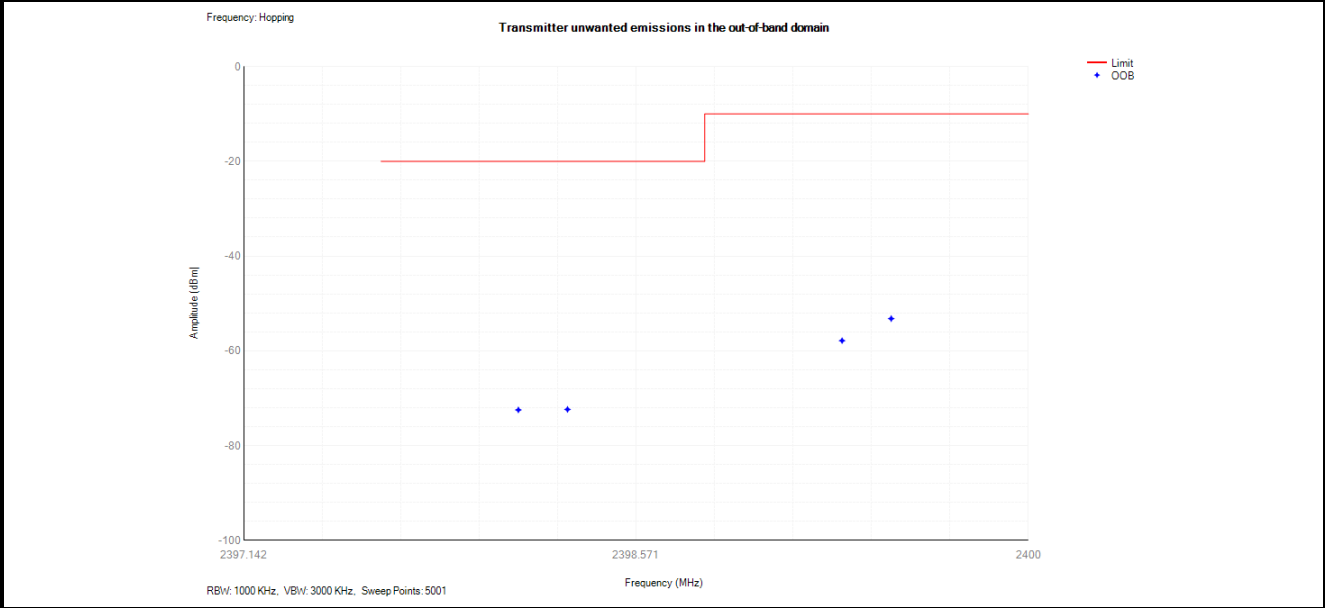

**High Channel 2480MHz**

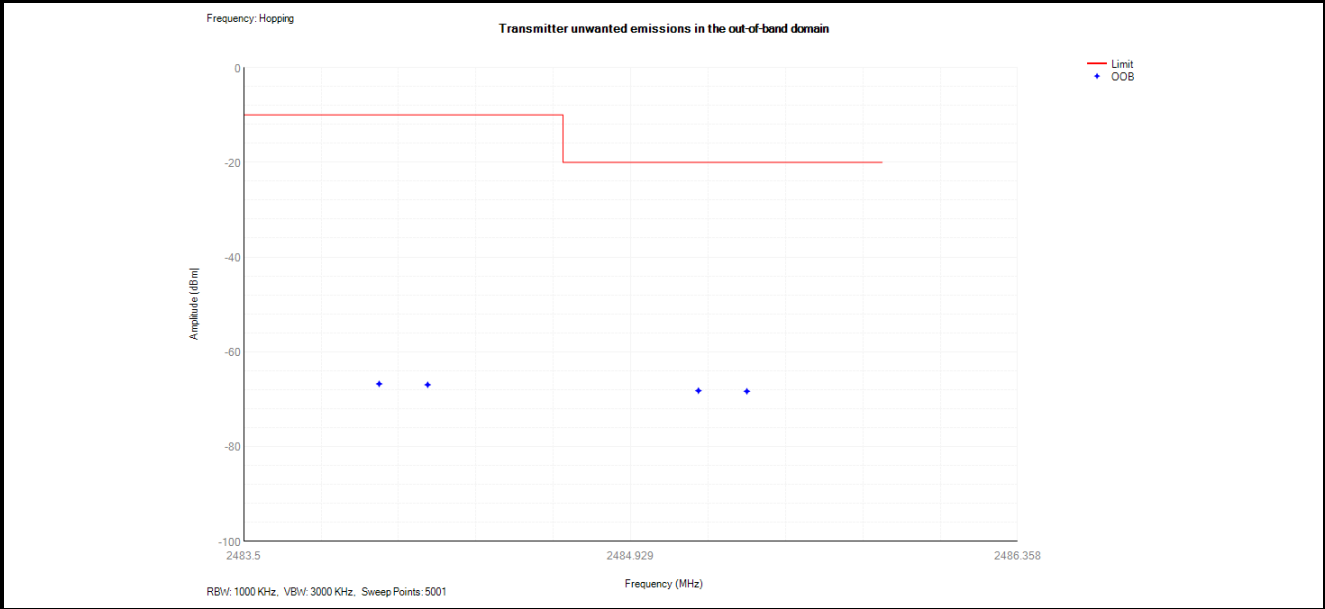


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 230V	Pressure:	1010 hPa
Test Mode:	8DPSK Mode		


**Test Data**

Remark: only show the worst test data, the test plots is as follows.

**Low Channel 2402MHz**

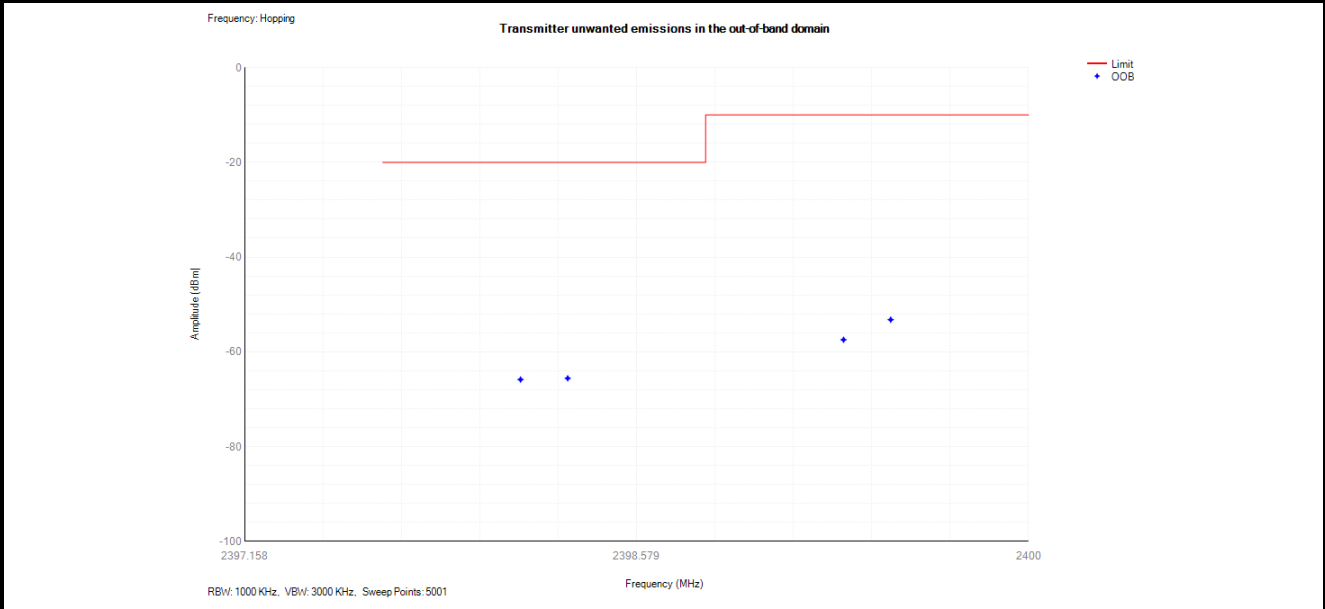


**High Channel 2480MHz**

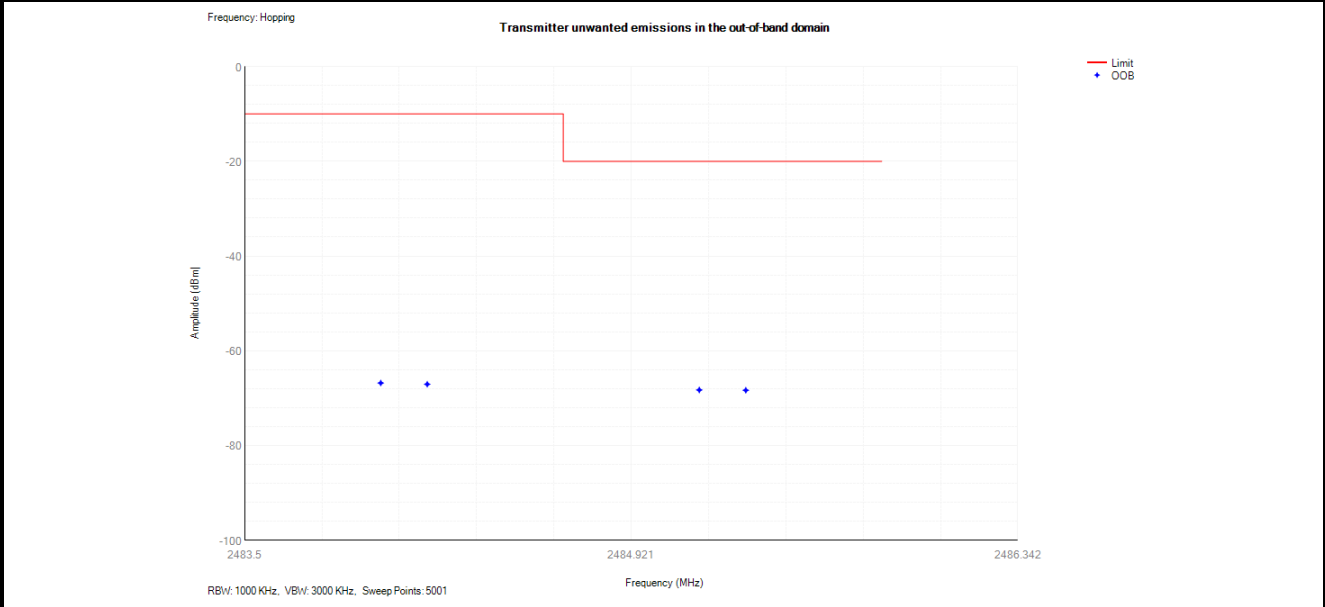

# Attachment F-- Transmitter unwanted emissions in the spurious domain Test Data

## (1) Bellow 1 G

Temperature:	23.6°C	Relative Humidity:	45%
Test Voltage:	AC 230V		
Ant. Pol.	Horizontal		
Test Mode:	TX Mode 2402MHz 1Mbps		
Remark:	Only showed the worst mode test data.		

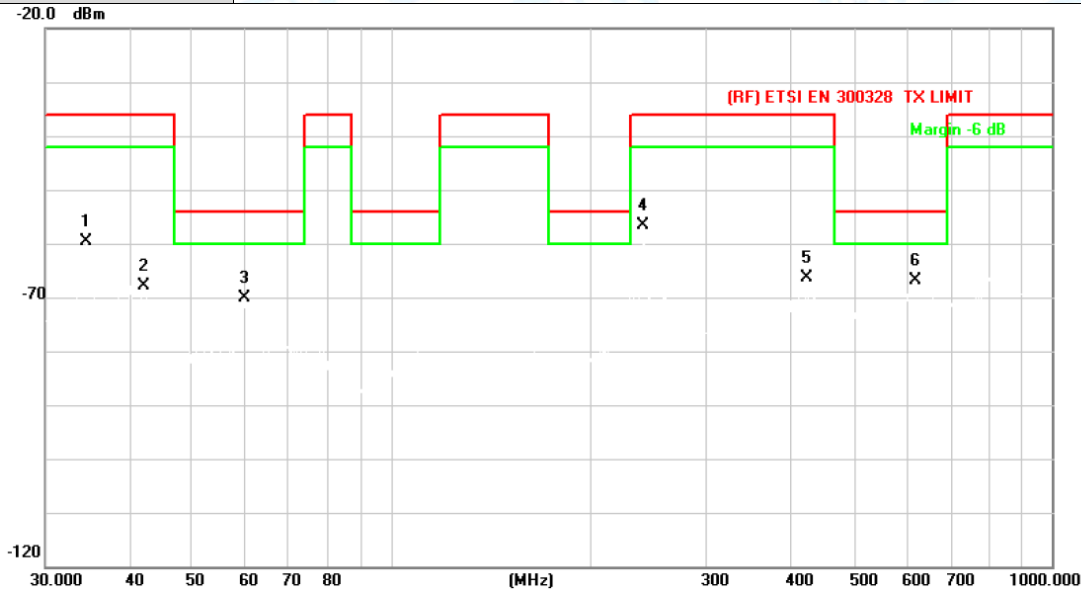


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector
1		34.5173	-58.73	-0.88	-59.61	-36.00	-23.61	peak
2		42.3022	-63.09	-4.81	-67.90	-36.00	-31.90	peak
3		60.0691	-62.29	-7.93	-70.22	-54.00	-16.22	peak
4		240.8304	-59.62	2.88	-56.74	-36.00	-20.74	peak
5		425.0280	-68.78	2.39	-66.39	-36.00	-30.39	peak
6	*	620.7096	-73.53	6.77	-66.76	-54.00	-12.76	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Margin (dB) = Peak(dBm) - Limit (dBm)

<b>Temperature:</b>	23.6°C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 230V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX Mode 2402MHz 1Mbps		
<b>Remark:</b>	Only showed the worst mode test data.		

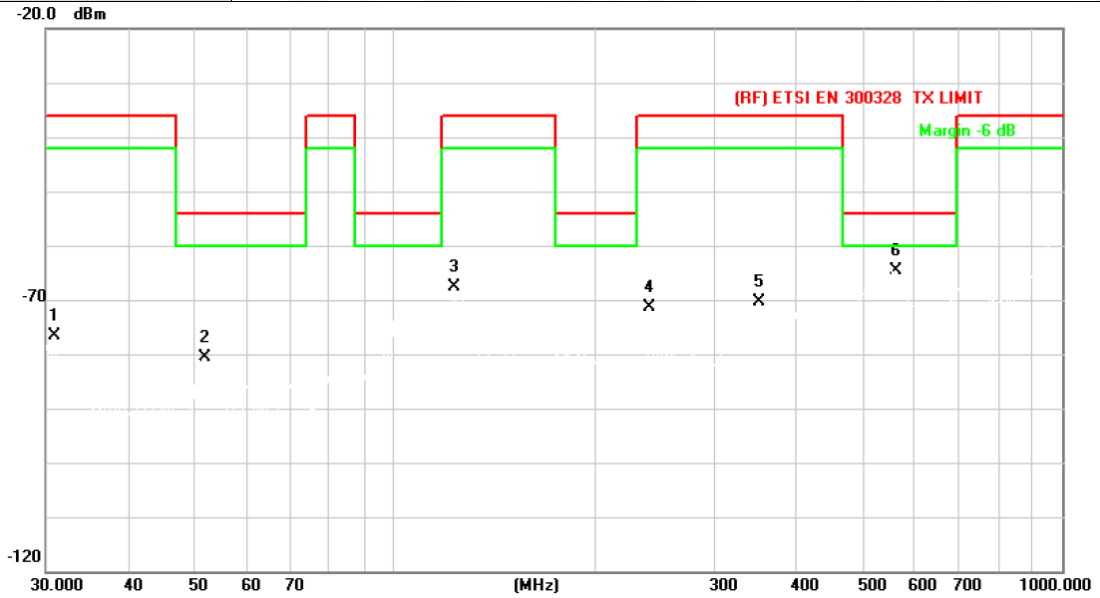

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector
1		30.8535	-69.46	-7.08	-76.54	-36.00	-40.54	peak
2		51.8430	-64.49	-16.08	-80.57	-54.00	-26.57	peak
3		122.8340	-63.24	-4.50	-67.74	-36.00	-31.74	peak
4		240.8304	-63.86	-7.52	-71.38	-36.00	-35.38	peak
5		351.7079	-69.67	-0.65	-70.32	-36.00	-34.32	peak
6	*	562.6624	-67.91	3.41	-64.50	-54.00	-10.50	peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Margin (dB) = Peak(dBm) - Limit (dBm)

(2) Above 1 G


Temperature:	23.6°C	Relative Humidity:	45%
Test Voltage:	AC 230V		
Ant. Pol.	Horizontal		
Test Mode:	TX Mode 2402MHz 1Mbps		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

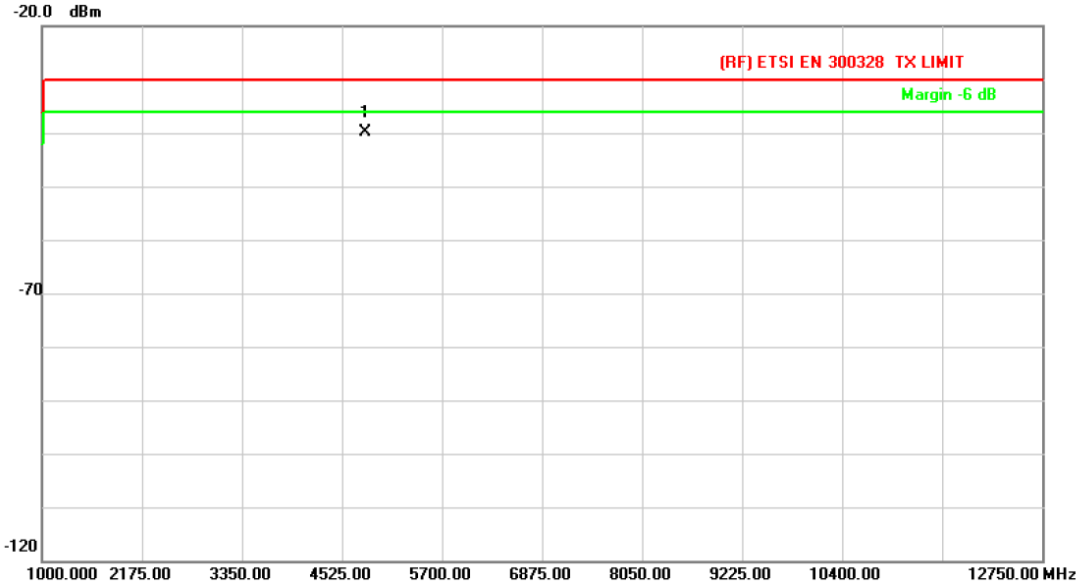

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBm	dB	dBm	dBm	dB	
1	*	4803.752	-64.94	25.00	-39.94	-30.00	-9.94	peak

- Remark:
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
  2. Margin (dB) = Peak(dBm) - Limit (dBm)

<b>Temperature:</b>	23.6°C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 230V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX Mode 2402MHz 1Mbps		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

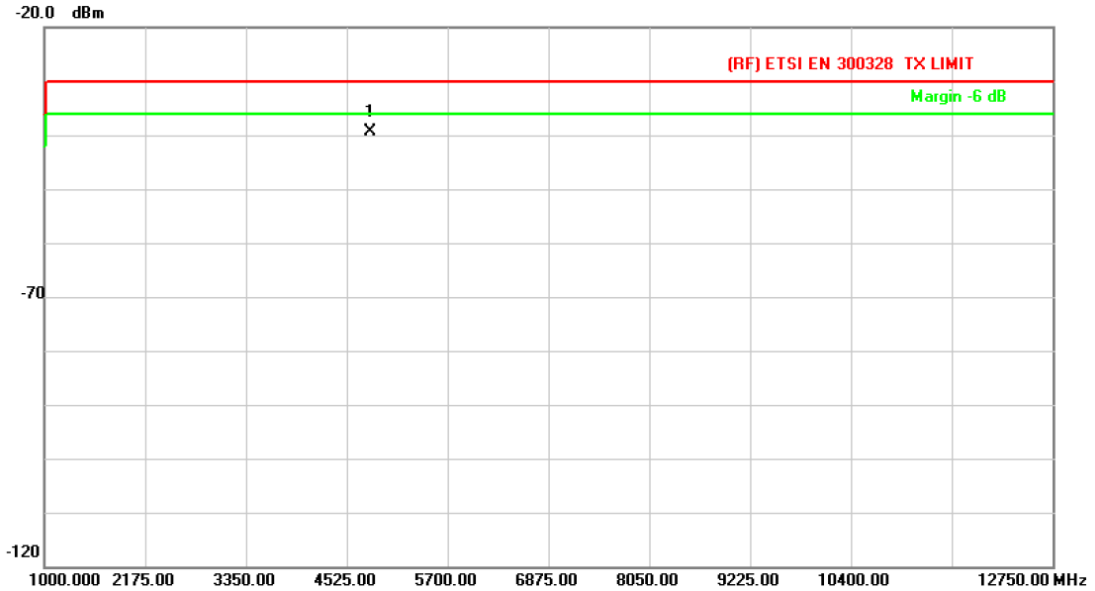


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBm	dB	dBm	dBm	dB	
1	*	4803.540	-66.40	27.03	-39.37	-30.00	-9.37	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Margin (dB) = Peak(dBm) - Limit (dBm)

<b>Temperature:</b>	23.6°C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 230V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX Mode 2480MHz 1Mbps		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

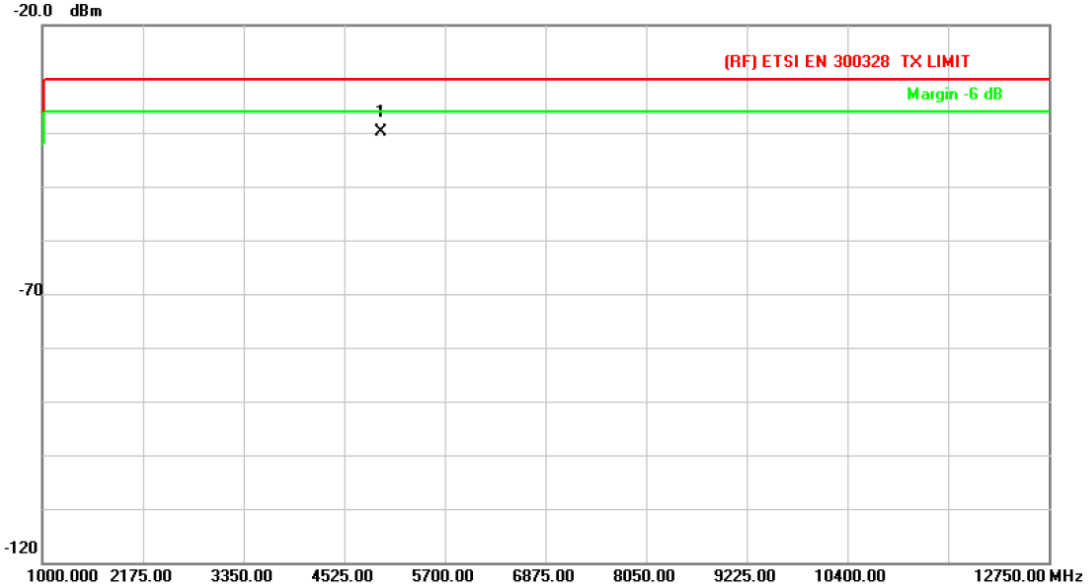


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector
1	*	4960.246	-67.97	28.03	-39.94	-30.00	-9.94	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Margin (dB) = Peak(dBm)-Limit (dBm)

<b>Temperature:</b>	23.6°C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 230V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX Mode 2480MHz 1Mbps		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

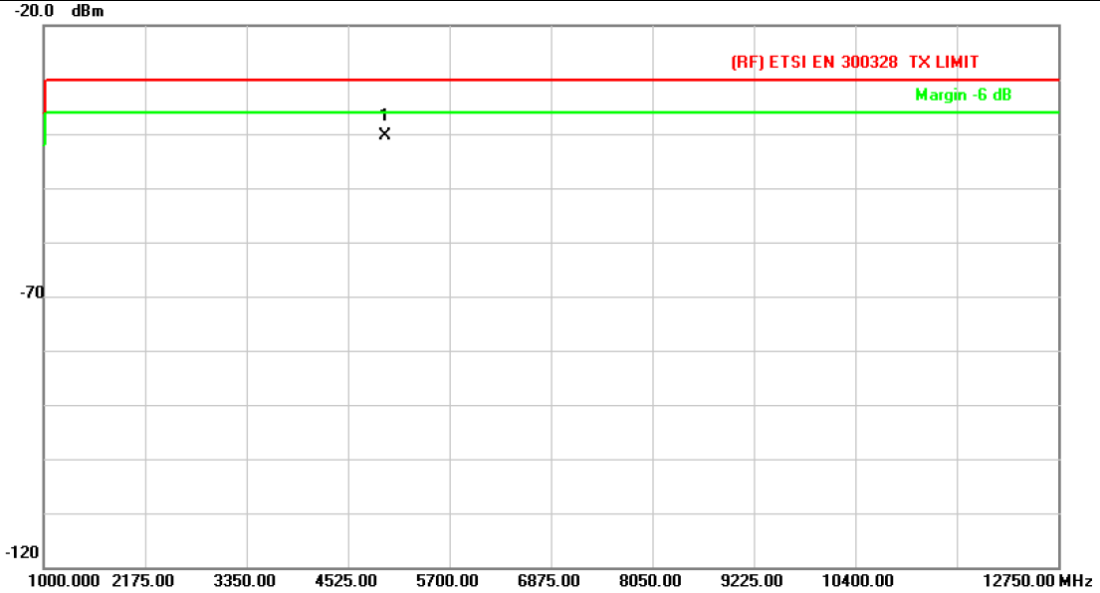


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector
1	*	4959.736	-66.27	25.84	-40.43	-30.00	-10.43	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Margin (dB) = Peak(dBm) - Limit (dBm)

<b>Temperature:</b>	23.6°C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 230V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX Mode 2402MHz 2Mbps		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

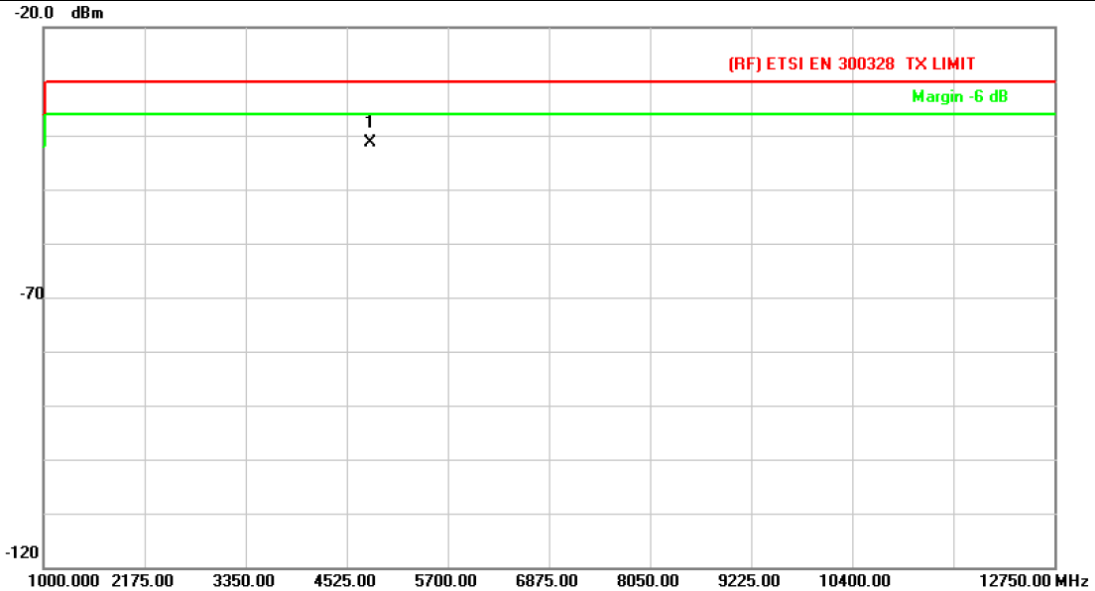


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBm	dB	dBm	dBm	dB	
1	*	4804.432	-66.35	25.01	-41.34	-30.00	-11.34	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Margin (dB) = Peak(dBm) - Limit (dBm)

<b>Temperature:</b>	23.6°C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 230V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX Mode 2402MHz 2Mbps		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

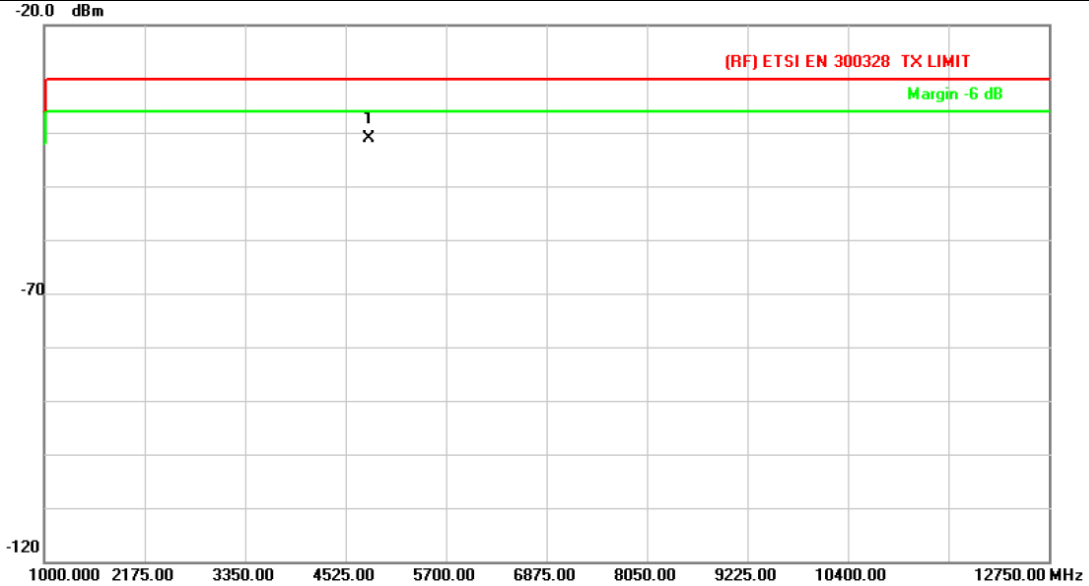


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector
1	*	4803.504	-68.09	27.03	-41.06	-30.00	-11.06	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Margin (dB) = Peak(dBm) - Limit (dBm)

<b>Temperature:</b>	23.6°C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 230V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX Mode 2480MHz 2Mbps		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

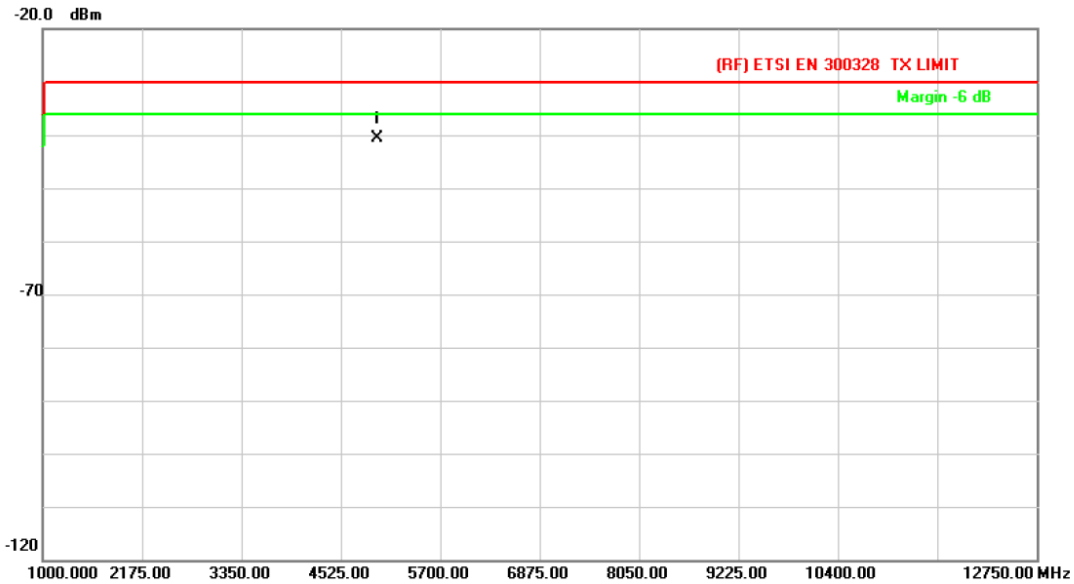


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector
1	*	4960.266	-68.54	28.03	-40.51	-30.00	-10.51	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Margin (dB) = Peak(dBm) - Limit (dBm)

<b>Temperature:</b>	23.6°C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 230V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX Mode 2480MHz 2Mbps		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

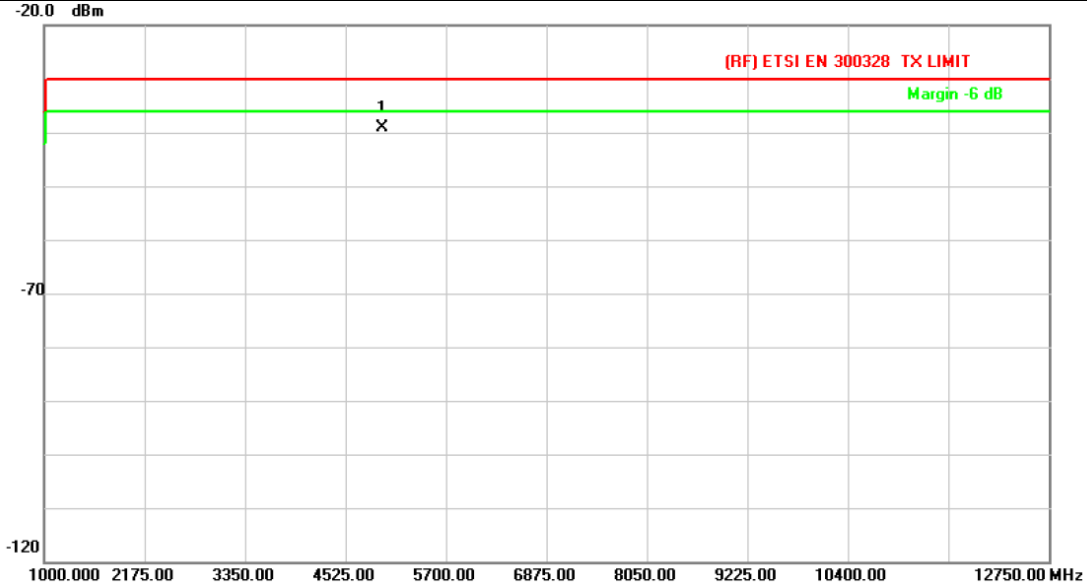


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBm	dB	dBm	dBm	dB	
1	*	4960.370	-65.00	25.84	-39.16	-30.00	-9.16	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Margin (dB) = Peak(dBm) - Limit (dBm)


<b>Temperature:</b>	23.6°C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 230V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX Mode 2402MHz 3Mbps		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

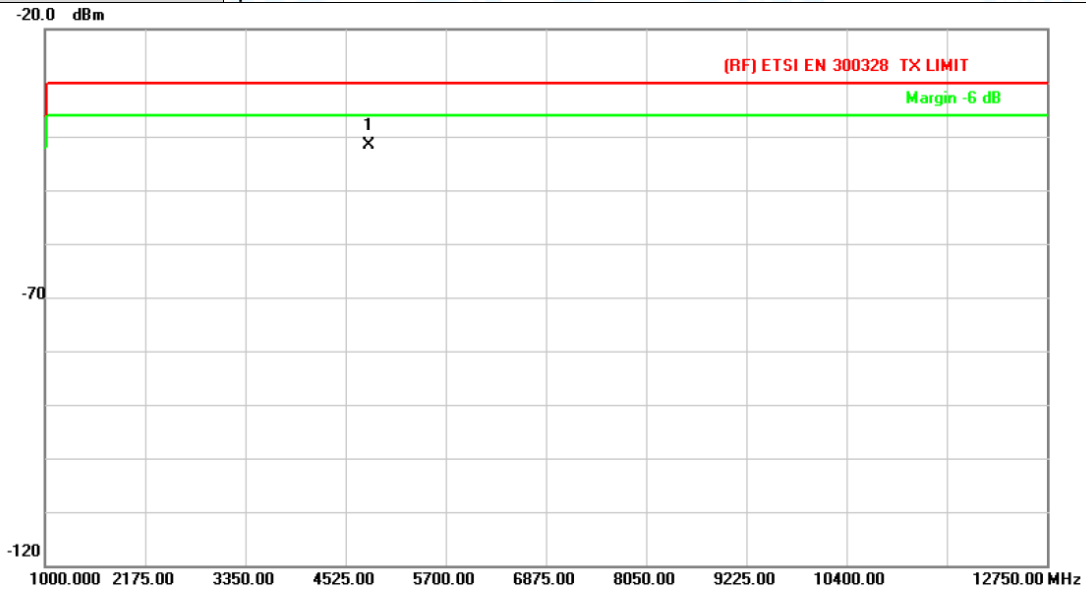

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBm	dB	dBm	dBm	dB	
1	*	4804.316	-66.53	25.01	-41.52	-30.00	-11.52	peak

- Remark:**
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
  2. Margin (dB) = Peak(dBm) - Limit (dBm)

<b>Temperature:</b>	23.6°C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 230V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX Mode 2402MHz 3Mbps		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

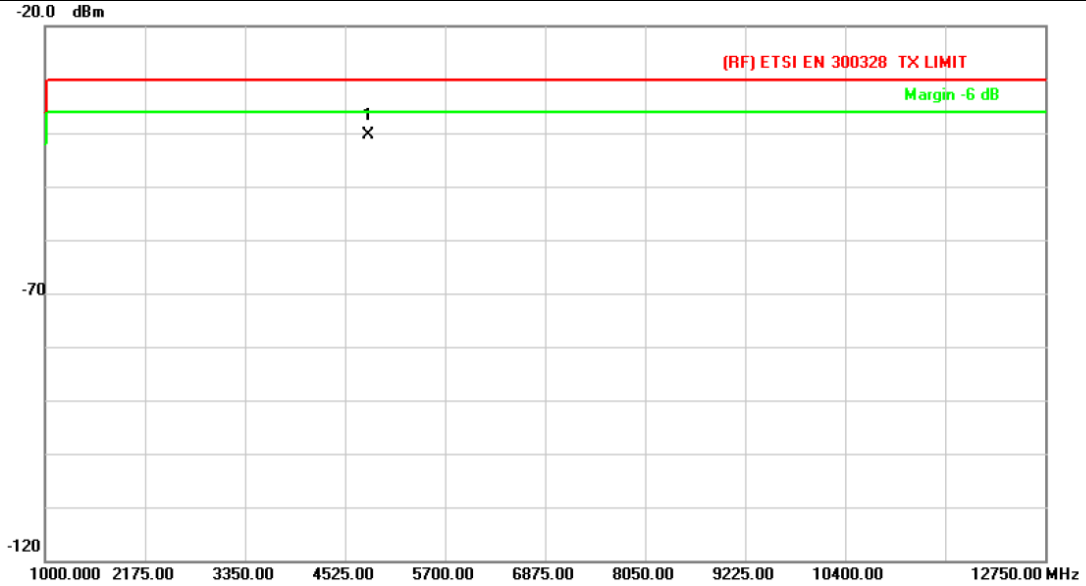


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector
1	*	4804.114	-67.48	27.04	-40.44	-30.00	-10.44	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Margin (dB) = Peak(dBm) - Limit (dBm)


<b>Temperature:</b>	23.6°C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 230V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX Mode 2480MHz 3Mbps		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

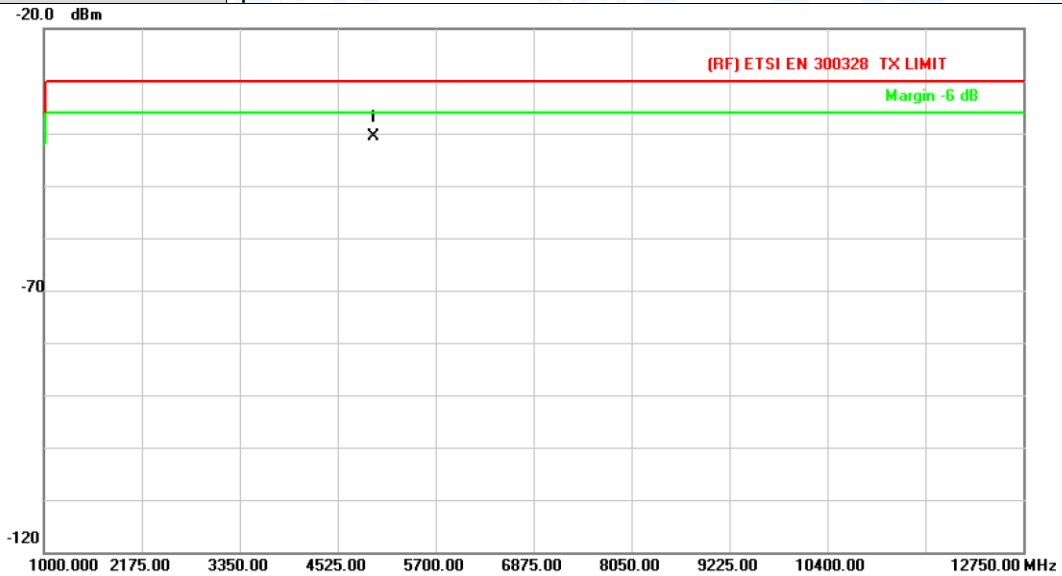

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector
1	*	4960.384	-66.49	25.84	-40.65	-30.00	-10.65	peak

- Remark:**
1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
  2. Margin (dB) = Peak(dBm) - Limit (dBm)

<b>Temperature:</b>	23.6 °C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 230V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX Mode 2480MHz 3Mbps		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

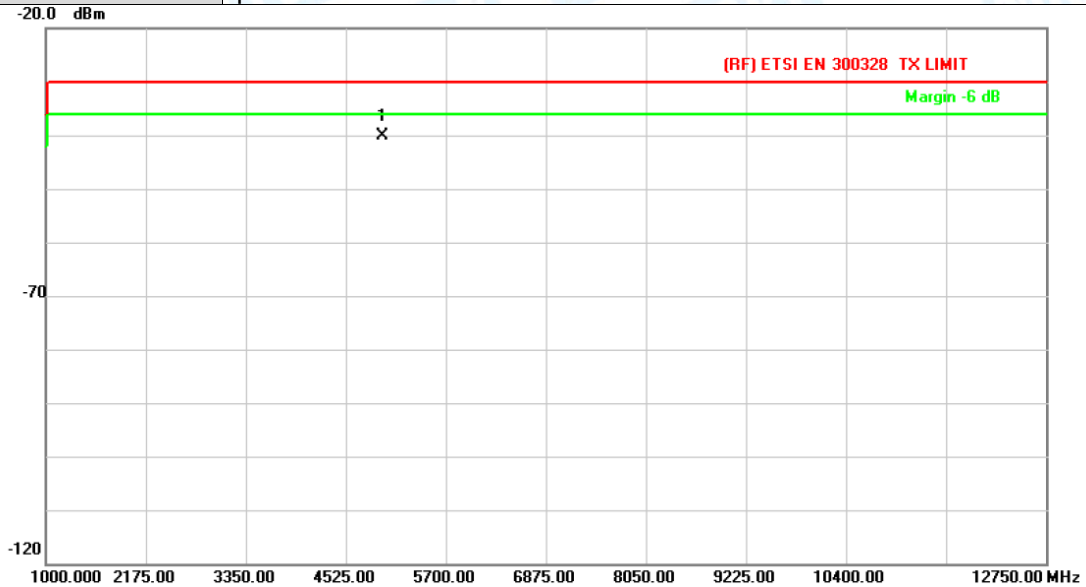

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector
1	*	4959.890	-68.21	28.03	-40.18	-30.00	-10.18	peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Margin (dB) = Peak(dBm) - Limit (dBm)

# Attachment G-- Receiver spurious emissions Test Data

## (1) Bellow 1 G


Temperature:	23.6°C	Relative Humidity:	45%
Test Voltage:	AC 230V		
Ant. Pol.	Horizontal		
Test Mode:	RX Mode 2402MHz 1Mbps		
Remark:	Only showed the worst mode test data.		

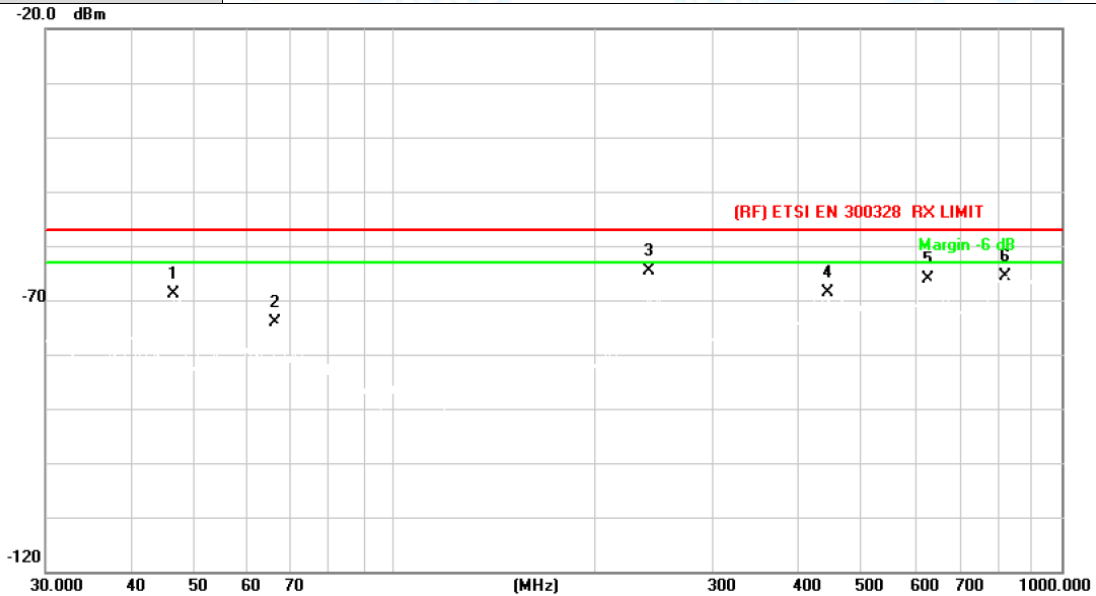

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector
1		46.6664	-61.08	-7.84	-68.92	-57.00	-11.92	peak
2		66.2662	-64.13	-9.93	-74.06	-57.00	-17.06	peak
3	*	240.8304	-67.58	2.88	-64.70	-57.00	-7.70	peak
4		446.4141	-70.91	2.35	-68.56	-57.00	-11.56	peak
5		629.4772	-73.31	7.28	-66.03	-57.00	-9.03	peak
6		821.7103	-73.33	7.79	-65.54	-57.00	-8.54	peak

Remark:  
 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)  
 2. Margin (dB) = Peak(dBm) - Limit (dBm)

<b>Temperature:</b>	23.6°C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 230V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	RX Mode 2402MHz 1Mbps		
<b>Remark:</b>	Only showed the worst mode test data.		

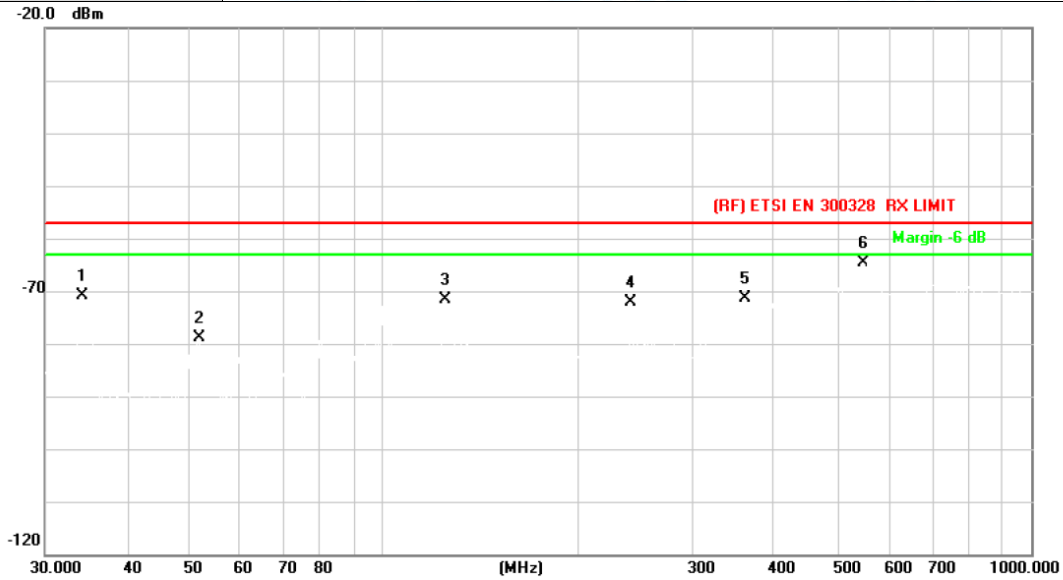


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector
1		34.2760	-61.56	-9.29	-70.85	-57.00	-13.85	peak
2		51.8430	-62.81	-16.08	-78.89	-57.00	-21.89	peak
3		124.5690	-66.83	-4.82	-71.65	-57.00	-14.65	peak
4		240.8304	-64.56	-7.52	-72.08	-57.00	-15.08	peak
5		361.7139	-70.47	-0.95	-71.42	-57.00	-14.42	peak
6	*	550.9480	-69.22	4.66	-64.56	-57.00	-7.56	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Margin (dB) = Peak(dBm) - Limit (dBm)

(2) Above 1 G


Temperature:	23.6 °C	Relative Humidity:	45%
Test Voltage:	AC 230V		
Ant. Pol.	Horizontal		
Test Mode:	RX Mode 2402MHz 1Mbps		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

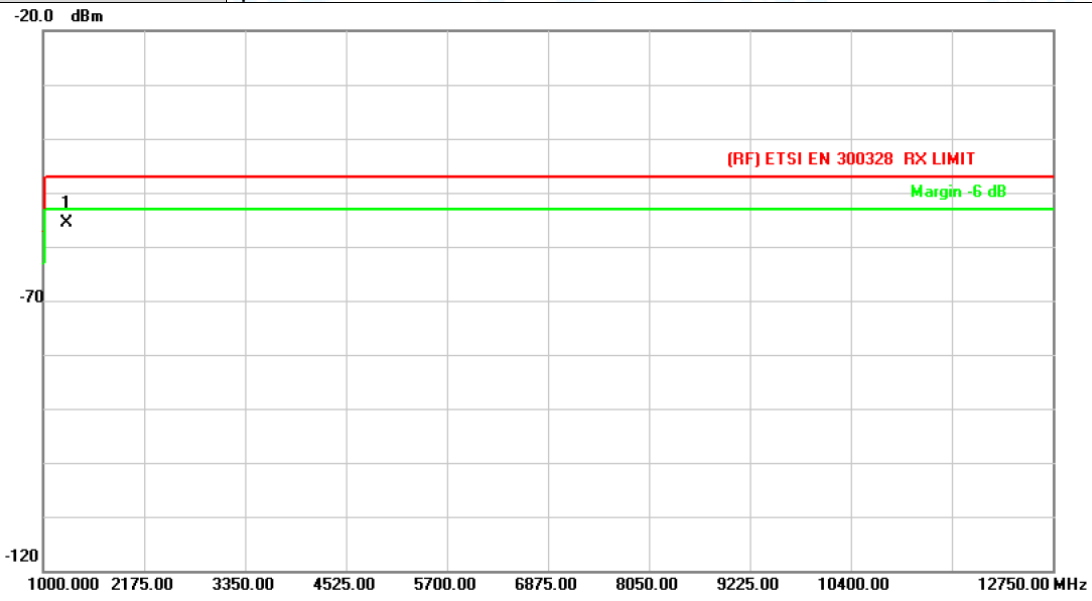

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBm	dB	dBm	dBm	dB	Detector
1	*	1271.536	-62.12	6.41	-55.71	-47.00	-8.71	peak

Remark:  
 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)  
 2. Margin (dB) = Peak(dBm) - Limit (dBm)

<b>Temperature:</b>	23.6°C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 230V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	RX Mode 2402MHz 1Mbps		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

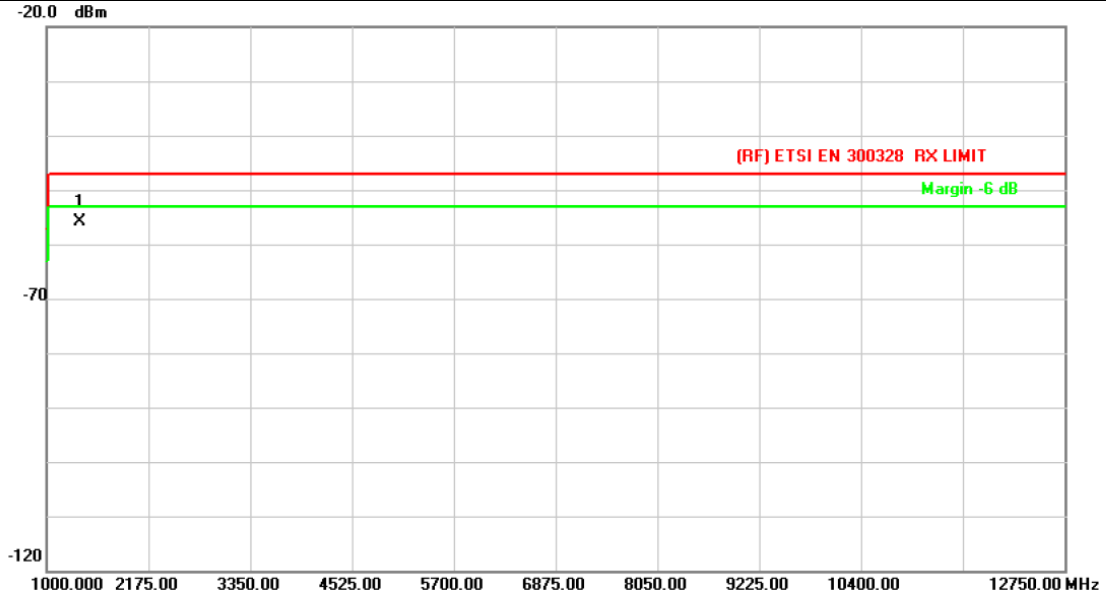


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBm	dB	dBm	dBm	dB	
1	*	1386.396	-64.60	8.80	-55.80	-47.00	-8.80	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Margin (dB) = Peak(dBm) - Limit (dBm)

<b>Temperature:</b>	23.6°C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 230V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	RX Mode 2480MHz 1Mbps		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

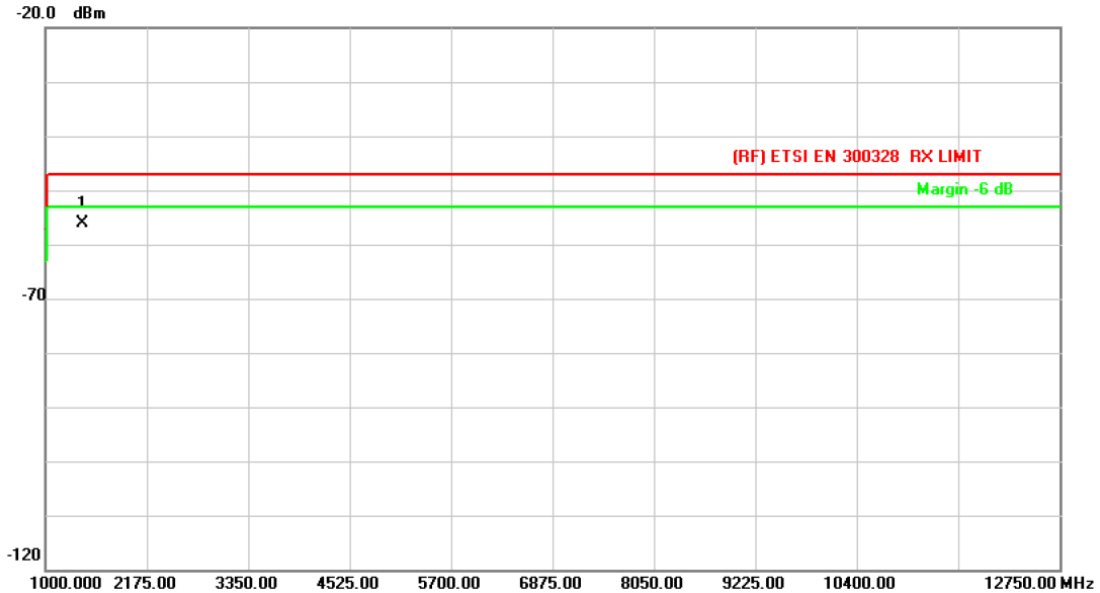


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBm	dB	dBm	dBm	dB	
1	*	1436.113	-63.75	7.54	-56.21	-47.00	-9.21	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Margin (dB) = Peak(dBm) - Limit (dBm)

<b>Temperature:</b>	23.6°C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 230V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	RX Mode 2480MHz 1Mbps		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

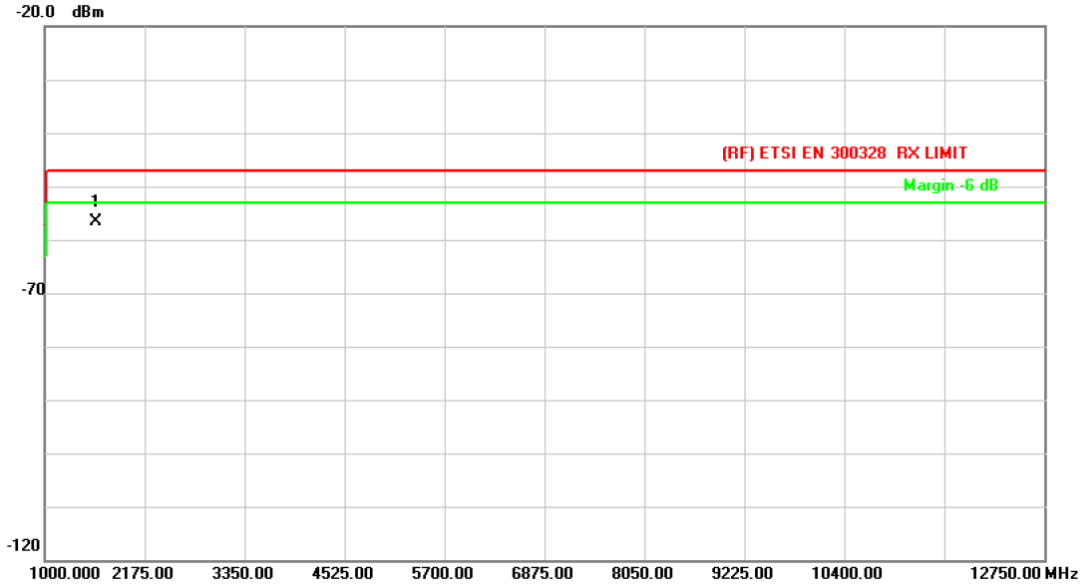


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector
1	*	1601.343	-64.13	7.55	-56.58	-47.00	-9.58	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Margin (dB) = Peak(dBm) - Limit (dBm)

<b>Temperature:</b>	23.6°C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 230V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	RX Mode 2402MHz 2Mbps		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

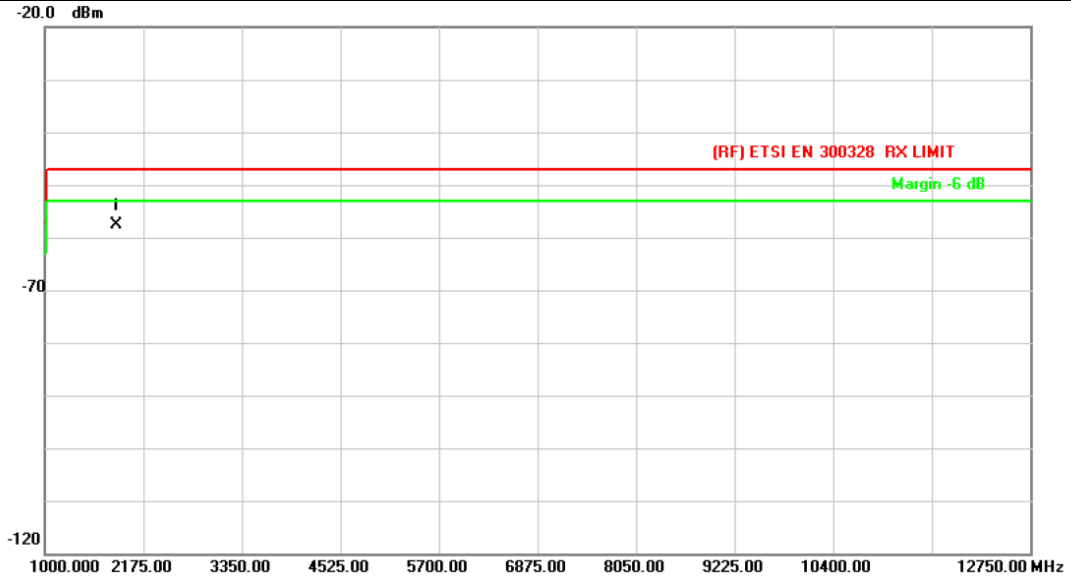


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBm	dB	dBm	dBm	dB	
1	*	1855.551	-65.75	8.11	-57.64	-47.00	-10.64	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Margin (dB) = Peak(dBm) - Limit (dBm)

<b>Temperature:</b>	23.6°C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 230V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	RX Mode 2402MHz 2Mbps		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

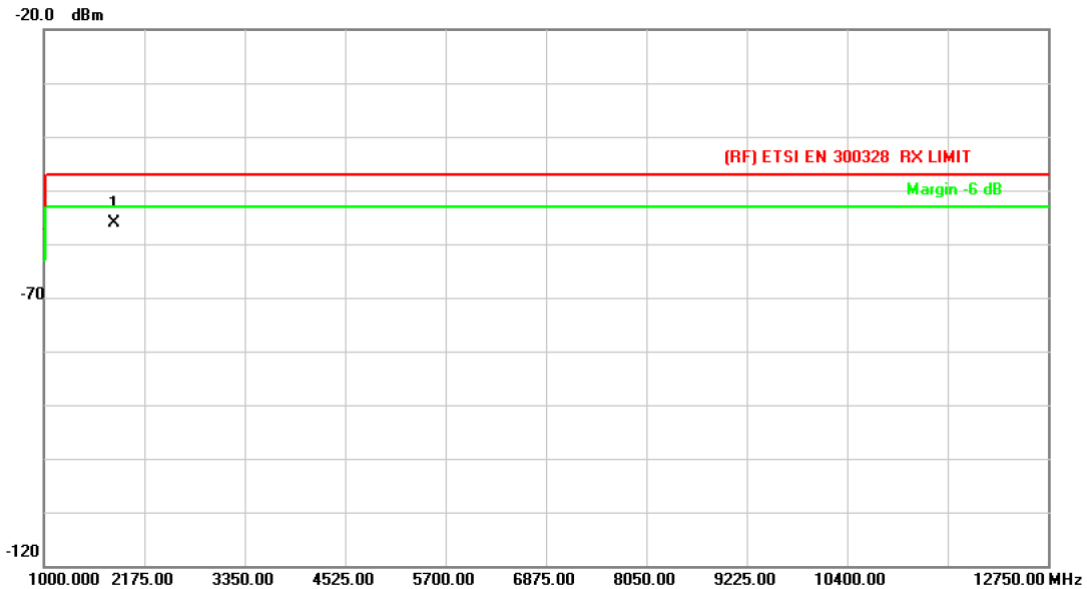


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector
1	*	1826.071	-66.39	10.29	-56.10	-47.00	-9.10	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Margin (dB) = Peak(dBm)-Limit (dBm)

<b>Temperature:</b>	23.6°C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 230V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	RX Mode 2480MHz 2Mbps		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

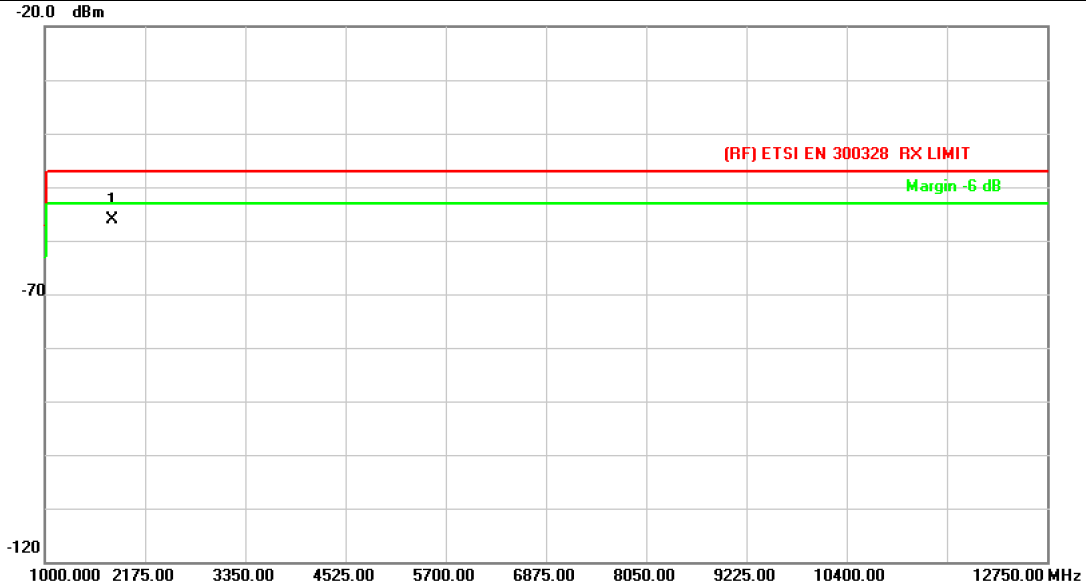


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector
1	*	1791.312	-64.96	8.96	-56.00	-47.00	-9.00	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Margin (dB) = Peak(dBm) - Limit (dBm)

<b>Temperature:</b>	23.6°C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 230V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	RX Mode 2480MHz 2Mbps		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

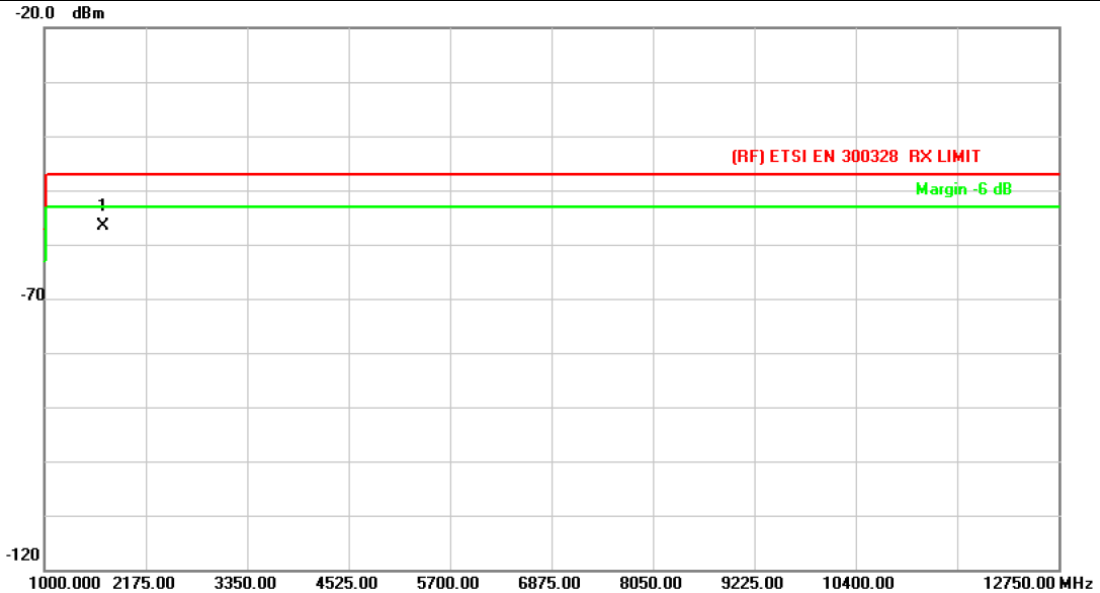


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBm	dB	dBm	dBm	dB	
1	*	1674.786	-65.51	8.90	-56.61	-47.00	-9.61	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Margin (dB) = Peak(dBm) - Limit (dBm)

<b>Temperature:</b>	23.6°C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 230V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	RX Mode 2402MHz 3Mbps		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

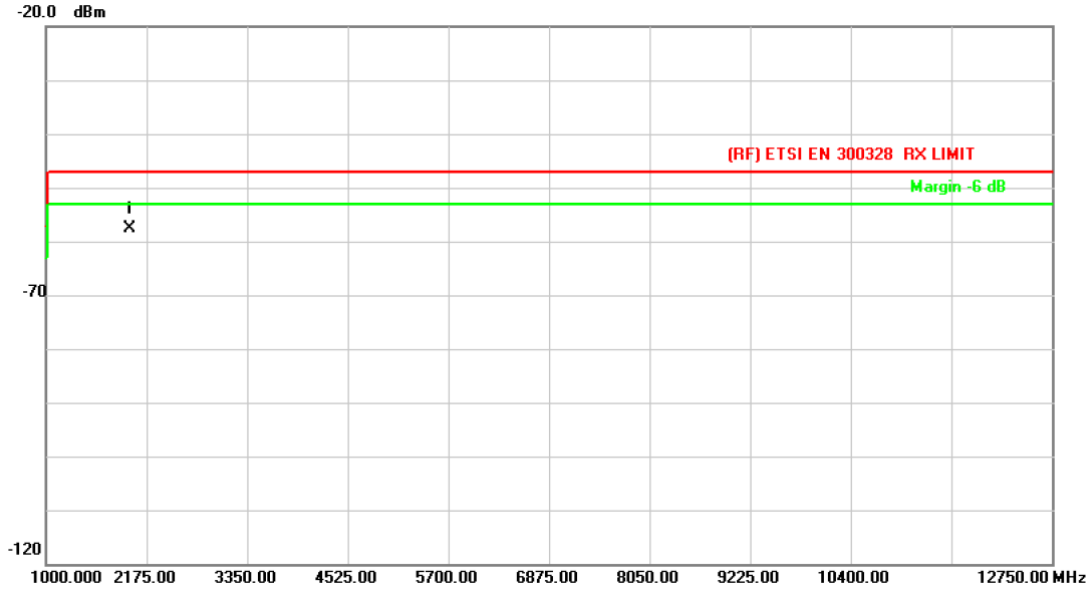


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector
1	*	1984.654	-67.19	9.45	-57.74	-47.00	-10.74	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Margin (dB) = Peak(dBm) - Limit (dBm)


<b>Temperature:</b>	23.6 °C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 230V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	RX Mode 2402MHz 3Mbps		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

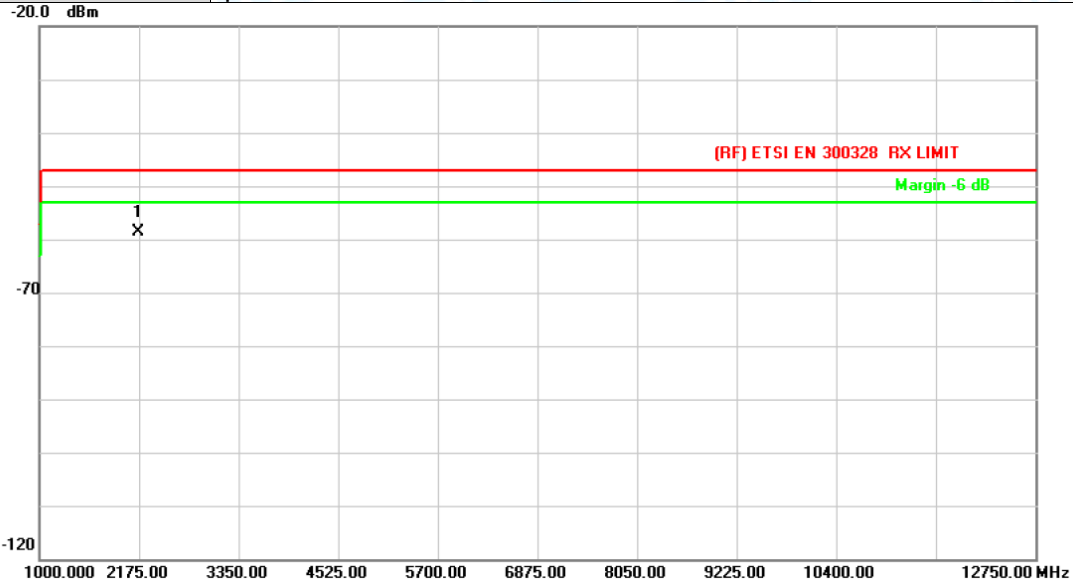

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBm	dB	dBm	dBm	dB	
1	*	2170.873	-67.67	8.93	-58.74	-47.00	-11.74	peak

**Remark:**  
 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)  
 2. Margin (dB) = Peak(dBm) - Limit (dBm)

<b>Temperature:</b>	23.6°C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 230V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	RX Mode 2480MHz 3Mbps		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

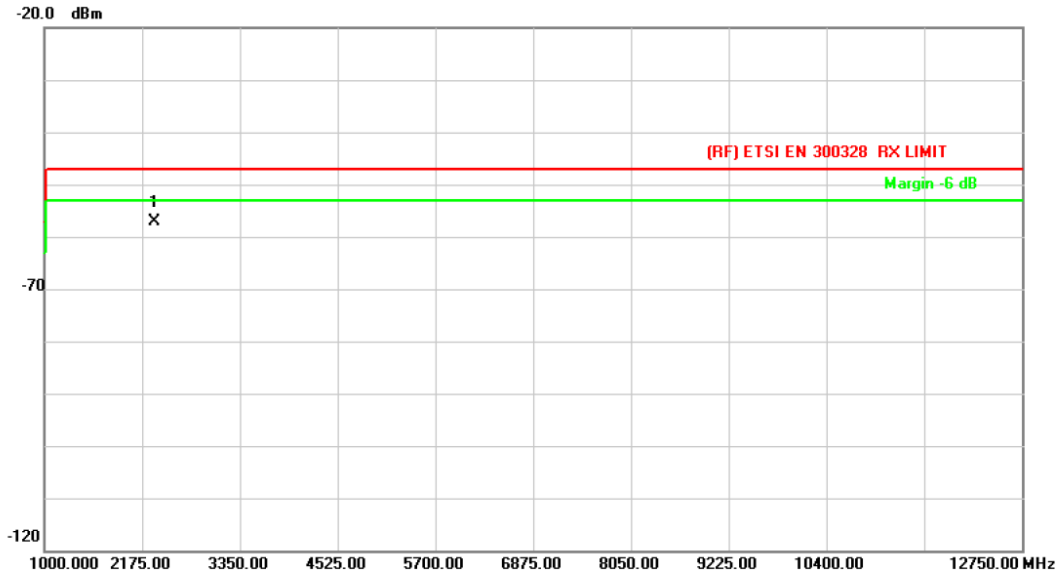


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBm	dB	dBm	dBm	dB	
1	*	2321.915	-66.64	9.55	-57.09	-47.00	-10.09	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Margin (dB) = Peak(dBm) - Limit (dBm)

<b>Temperature:</b>	23.6 °C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 230V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	RX Mode 2480MHz 3Mbps		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

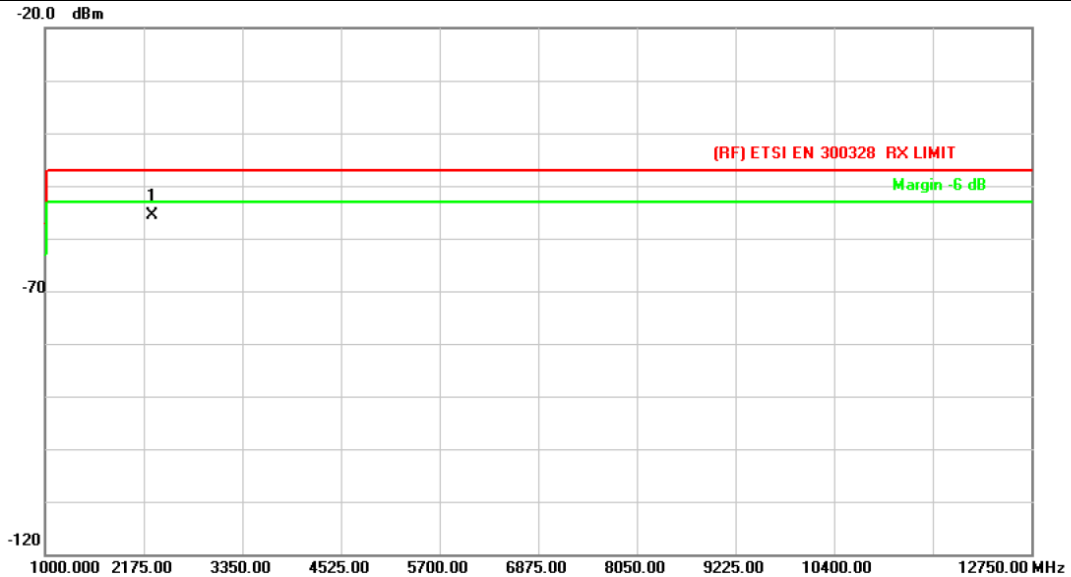

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBm	dB	dBm	dBm	dB	
1	*	2270.435	-66.20	10.62	-55.58	-47.00	-8.58	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Margin (dB) = Peak(dBm) - Limit (dBm)



# Attachment H-- Receiver Blocking Test Data

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 230V		
Test Mode:	GFSK		

**Test Data**

Receiver Categories:  category 1  category 2  category 3

Frequency (MHz)	Blocking Signal Power (dBm)	Wanted signal mean power from companion device (dBm)	Type of blocking signal	Blocking Frequency (MHz)	PER Result (%)	Limit	Result
2402	-32	-68.32	CW	2380	2.38	10	Pass
	-32	-68.32		2504	2.52	10	Pass
	-32	-68.32		2300	2.74	10	Pass
	-32	-68.32		2584	3.06	10	Pass
	-32	-68.32		2380	2.11	10	Pass
2480	-32	-68.32		2504	2.39	10	Pass
	-32	-68.32		2300	2.64	10	Pass
	-32	-68.32		2584	2.87	10	Pass

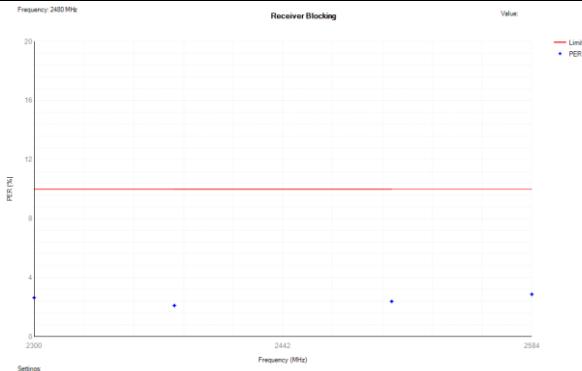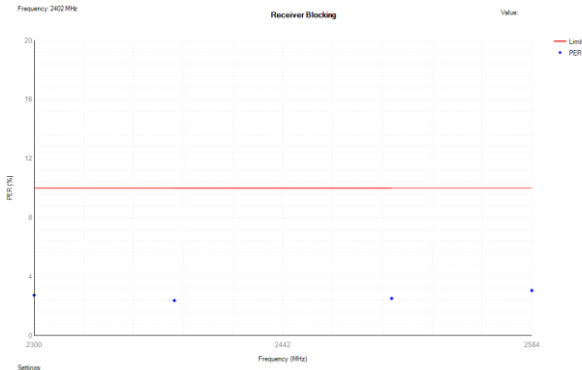



Note: Blocking Signal Power=-34dBm+G(dBi)  
Wanted signal mean power is  $(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 10 \text{ dB})$  or  $(-74 \text{ dBm} + 10 \text{ dB})$  whichever is less. OCBW is in Hz.

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 230V		
Test Mode:	Pi/4-DQPSK		

**Test Data**

Receiver Categories:  category 1  category 2  category 3

Frequency (MHz)	Blocking Signal Power (dBm)	Wanted signal mean power from companion device (dBm)	Type of blocking signal	Blocking Frequency (MHz)	PER Result (%)	Limit	Result
2402	-32	-68.28	CW	2380	2.28	10	Pass
	-32	-68.28		2504	2.47	10	Pass
	-32	-68.28		2300	2.69	10	Pass
	-32	-68.28		2584	2.95	10	Pass
2480	-32	-68.28		2380	2.25	10	Pass
	-32	-68.28		2504	2.49	10	Pass
	-32	-68.28		2300	2.68	10	Pass
	-32	-68.28		2584	2.77	10	Pass

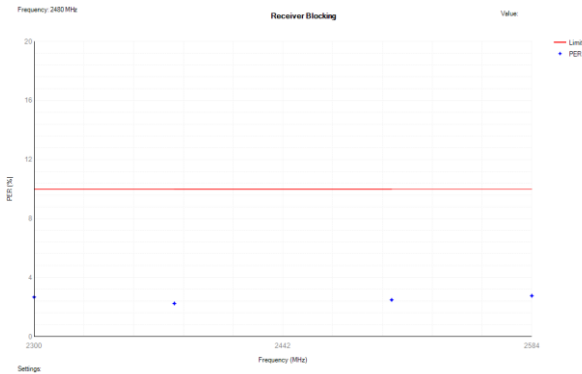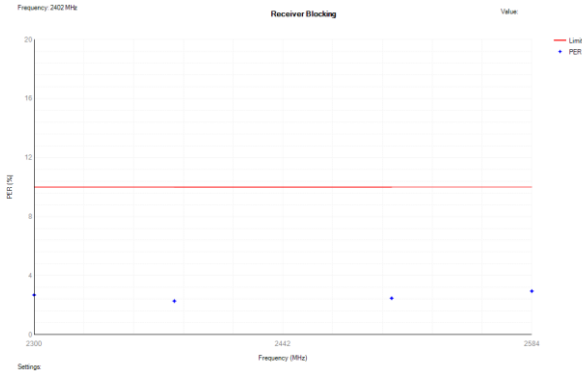



Note: Blocking Signal Power =  $-34\text{dBm} + G(\text{dBi})$   
 Wanted signal mean power is  $(-139\text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 10\text{ dB})$  or  $(-74\text{ dBm} + 10\text{ dB})$  whichever is less. OCBW is in Hz.

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 230V		
Test Mode:	8DPSK		

**Test Data**

Receiver Categories:  category 1  category 2  category 3

Frequency (MHz)	Blocking Signal Power (dBm)	Wanted signal mean power from companion device (dBm)	Type of blocking signal	Blocking Frequency (MHz)	PER Result (%)	Limit	Result
2402	-32	-68.31	CW	2380	2.43	10	Pass
	-32	-68.31		2504	2.75	10	Pass
	-32	-68.31		2300	3.02	10	Pass
	-32	-68.31		2584	3.38	10	Pass
2480	-32	-68.31		2380	2.39	10	Pass
	-32	-68.31		2504	2.56	10	Pass
	-32	-68.31		2300	2.81	10	Pass
	-32	-68.31		2584	3.12	10	Pass

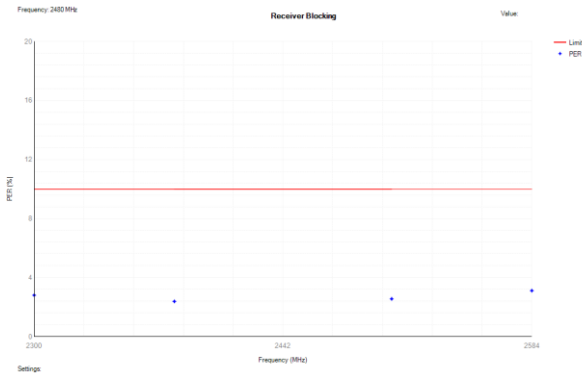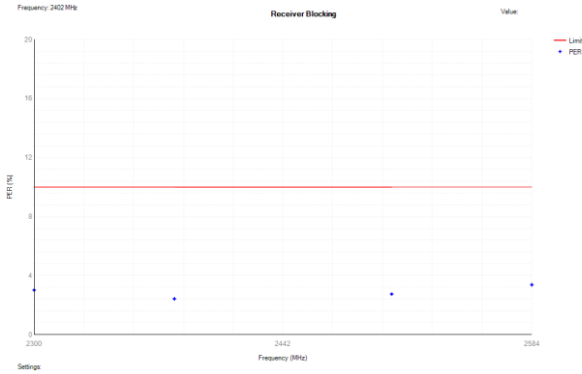

Note: Blocking Signal Power =  $-34\text{dBm} + G(\text{dBi})$   
Wanted signal mean power is  $(-139\text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 10\text{ dB})$  or  $(-74\text{ dBm} + 10\text{ dB})$  whichever is less. OCBW is in Hz.

-----END OF REPORT-----